

MARCHEF

广州叁越食品机械有限公司

GUANGZHOU SANYUE FOOD EQUIPMENT CO.,LTD

+86-18816804012 / 0086-02031360549

yi@marchef.cn admin@marchef.cn

www.marchef.cn
www.marchefchina.com
www.gzmarchef.en.alibaba.com

Export Office Add : Building 5, No.3 Meishan
Street,Dalong Street, Panyu District, Guangzhou City

Add1 : No.20 Shenghui Rd.Nantou
Town.Zhongshan.Guangdong

Add2 : No11 Building.No3 Nanzhuang Road.Lianhu
Village,Shatou.Panyu Area Guangzhou Guangdong



2022

Kitchen Equipment

Product Brochure



CATALOGUE

01-09	Electric Fryer	35	Induction Cooker	67	Soup Kettle	80	Sous Vide
10-13	Gas Fryer	36	Electric Crepe Maker/Gas Crepe Maker	68	French Fry Warmer Station	81	Gas Shawarma Grill
14-15	Pressure Fryer	37-38	Hot Dog Bun Warmer	69	Food Heat Lamp	82	Food Smoker
16-19	Electric Griddle	39	Hot Dog Roller Grill	70-71	Food Warmer	83-84	Electric Pizza Oven
20-22	Gas Griddle	40-54	Waffle Maker	72	Cup/Plate Warmer	85-89	Convection Oven
23-25	Panini Sandwich Gril	55	Popcorn Maker	73	Knife Steriliser	90	Electric Oven
26	Gas BBQ Grill	56	Candy Floss Maker	74	Pasta Cooker	91-92	Gas Oven
27-28	Gas Griddle	57-62	Electric Bain Marie	75	Water Boiler	93-94	Electric Proofer
29-31	Gas Lava Rock Gril & Gas Burner	63-64	Chocolate Melter	76	Coffee Boiler	95-96	Multifunction Oven
32-33	Electric Salamander	65-66	Sauce Cheese Warmer	77-78	Coffee Grinder	97	Gas Rotary Oven
34	Electric Toaster	66	Stainless Stee Condiment Dispenser	79	Milk Shaker	98	Oil Filter Cart

Commercial Electric&Gas Fryer



Electric Fryer

- Stainless steel **heating tube** provide quick heat-up
- **Stainless steel 201 structure** ensure longer life
- **The 392°F (200°C)** thermostat internal wiring
- Lid prevents boiling oil from splashing
- Durable Frying pan basket with handle for safe operation
- **Non-skid rubber feet** prevent slipping
- Easy-to-remove oil pan
- Internal **micro-switch** disconnects power when element box is removed



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-81	220-240V/50~60Hz	3	10	280*436*310
EF-82		3+3	10+10	570*435*310
EF-83		3+3	20	550*440*320



Easy-to-remove oil pan



Stainless steel heating tube provide quick heat-up



Stainless steel frying basket with handle for safe operation



Safety temperature limiter-Au-tomatic thermal overload shutoff for safety

MODEL EF-81



MODEL EF-82



MODEL EF-83



Electric Fryer

- **Stainless steel heating tube** provide quick heat-up
- **Durable Frying pan basket** with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (**200°C**) **thermostat** internal wiring
- **Lid** prevents boiling oil from splashing



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-101	220-240V/50~60Hz	3	10	280*430*270
EF-102		3+3	10+10	565*430*270
EF-061		2	6	190*440*280
EF-081		2	8	190*440*320
EF-062		2+2	6+6	190*440*280
EF-082		2+2	8+8	380*440*320

MODEL EF-101



Electric Fryer

- **Stainless steel heating tube** provide quick heat-up
- Stainless steel 201 structure ensure longer life
- The 392°F (**200°C**) **thermostat** internal wiring
- **Lid** prevents boiling oil from splashing
- Easy-to-remove oil pan



MODEL EF-4L



EF-102



EF-062

Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-4L	220-240V/50~60Hz	2.5	4	217*385*310
EF-6L		3	6	265*420*290
EF-8L		3	8	265*415*330
EF-11L		3	11	275*475*350

MODEL EF-8LV



MODEL EF-4L-2





Rotating fryer head,Easy to clean



Easy-to-remove oil pan



Can block food residue, effectively increase the life of the heating tube

MODEL EF-061



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-4L-2	220-240V/50~60Hz	2.5+2.5	4+4	443*385*310
EF-6L-2		3+3	6+6	550*410*290
EF-8L-2		3+3	8+8	545*410*330
EF-11L-2		3+3	11+11	570*475*350
EF-8LV		3	8	270*485*405
EF-8LV-2		3+3	8+8	550*485*405

Electric Fryer

- **Stainless steel heating tube** provide quick heat-up
- Durable Frying pan **basket** with handle for safe operation
- **Stainless steel 201 structure** ensure longer life
- The 392°F (200°C) **thermostat** internal wiring
- **Lid** prevents boiling oil from splashing
- **Non-skid rubber feet** prevent slipping
- Easy-to-remove **oil pan**



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-101V	220-240V/50~60Hz	3	10	279*470*349
EF-131V		3	13	310*485*350
EF-161V		3	16	340*560*380
EF-102V	220-240V/50~60Hz	3+3	10+10	570*470*345
EF-132V		3+3	13+13	630*475*358
EF-162V		3+3	16+16	690*560*380
WT-01	/	/	/	370*450*800
WT-02		/	/	730*450*800



Rotaing fryer head,easy to clean



Stainless Steel frying basket with handle for safe operation



Seamless mold cylinder



Internal micro-switch disconnects power when element box is removed

MODEL EF-101V



MODEL WT-01

Base cabinet for fryer



MODEL EF-102V



Electric Fryer

- **Stainless steel heating tube** provide quick heat-up
- Durable Frying pan **basket** with handle for safe operation
- **Stainless steel 201 structure** ensure longer life
- The 392°F (200°C) **thermostat** internal wiring
- **Lid** prevents boiling oil from splashing
- **Non-skid rubber feet** prevent slipping
- Easy-to-remove **oil pan**



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-121VW	220-240V/50~60Hz	3	12	290*480*395
EF-141VW		3	14	360*500*340
EF-161VW		5	16	360*500*400
EF-122VW	220-240V/50~60Hz	3+3	12+12	580*480*395
EF-142VW		3+3	14+14	730*500*340
EF-162VW		5+5	16+16	730*500*400
EF-21L	220~380V/50~60Hz	6	21	347*700*510
EF-21L-2		6+6	21+21	675*700*510
EF-21L-2F		9+9	21+21	676*678*1181

MODEL EF-21L-2F



Seamless mold cylinder



Internal micro-switch disconnects power when element box is removed

MODEL EF-121VW



MODEL EF-21L



MODEL EF-21L-2



Electric Fryer

- **Stainless steel heating tube** provide quick heat-up
- Durable Frying pan **basket** with handle for safe operation
- **Stainless steel 201 structure** ensure longer life
- The 392°F (200°C) **thermostat** internal wiring
- **Lid** prevents boiling oil from splashing
- **Non-skid rubber feet** prevent slipping
- **Drain valve** for easy draining and cleaning



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-161VC	220-240V/50~60Hz	5	16	358*530*915
EF-162VC		5+5	16+16	730*530*890




Rotaing fryer head,easy to clean



Stainless Steel frying basket with handle for safe operation



Seamless mold cylinder

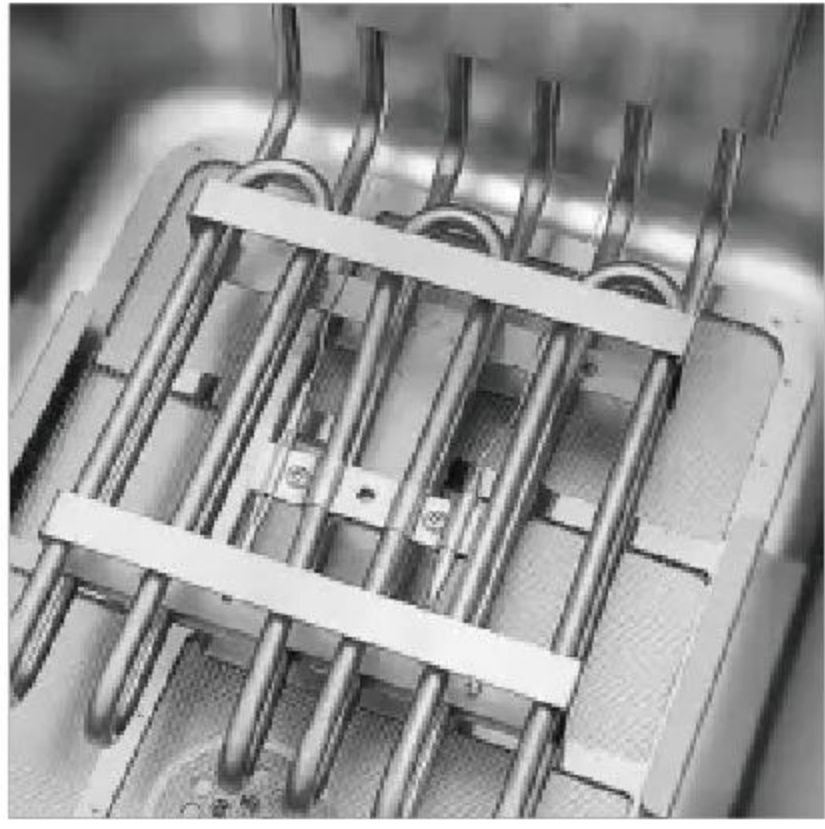

Staubkess Steel heating tube provide quick heat-up

MODEL EF-161VC



MODEL EF-162VC



Electric Fryer



- Stainless steel dry burnable heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan

MODEL EF-45V



MODEL EF-25



MODEL EF-201S



MODEL EF-201V



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-201S	220-240V/50~60Hz	4.8	30	590*525*915
EF-301S		6	38	606*575*915
EF-45V		7.5	45	590*670*1010
EF-25	380V/50Hz	9	25	715*585*420
EF-201V	220-240V/50~60Hz	4.8	30	590*525*355
EF-301V		6	38	603*575*405

Electric Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Drain valve for easy draining and cleaning



MODEL EF-26VC



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-26VC	380V/50Hz	10	21	420*830*1080
EF-26-2		10+10	21+21	800*830*1080

MODEL EF-26-2



Gas Fryer

- Stainless steel heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- The 392°F (200°C) thermostat internal wiring
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan



MODEL GF-71



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-71	2800/2000Pa	LPG/Natural Gas	10	285*470*480
GF-72			10+10	580*470*480
GF-73			20	580*470*480



Simple ignition switch, Efficient and fast



Non-skid rubber feet prevent slipping



Simple ignition switch, Efficient and fast



Nickel plating frying basket with handle for safe operation

MODEL GF-72




MODEL GF-73



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Precision imported thermostat
- With Stainless Steel legs

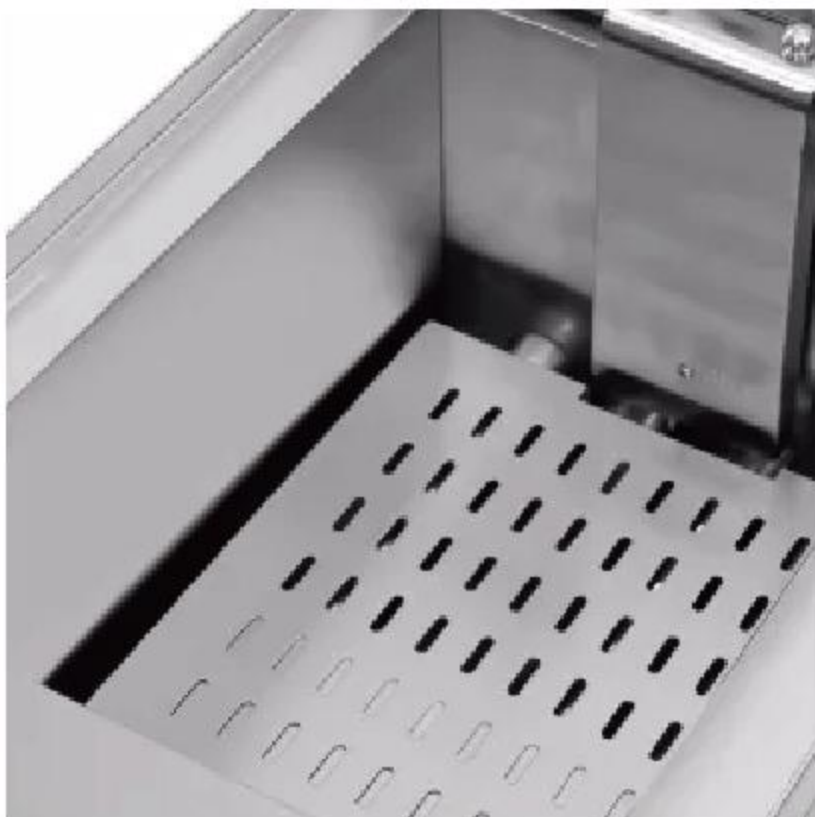

Fully-welded oil tank with safety interlocked



Stainless steel feets ,Safe and firm

MODEL GF-181



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Precision imported thermostat
- With Stainless Steel legs



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-17H	2800/2000Pa	LPG/Natural Gas	30	505*580*480
GF-17H-2			30+30	980*580*480
GF-23H			23	550*595*1000

MODEL GF-23H



MODEL GF-481



Model	Pressure	Used Gas	Capacity(L)	Size(mm)
GF-181	2800/2000Pa	LPG/Natural Gas	17	320*653*562
GF-182			17+17	640*674*562
GF-481			48	450*680*980
GF-482			48+48	820*680*980


MODEL GF-182



Fully-welded oil tank with safety interlocked



Imported Taiwan thermostat, Precise temperature

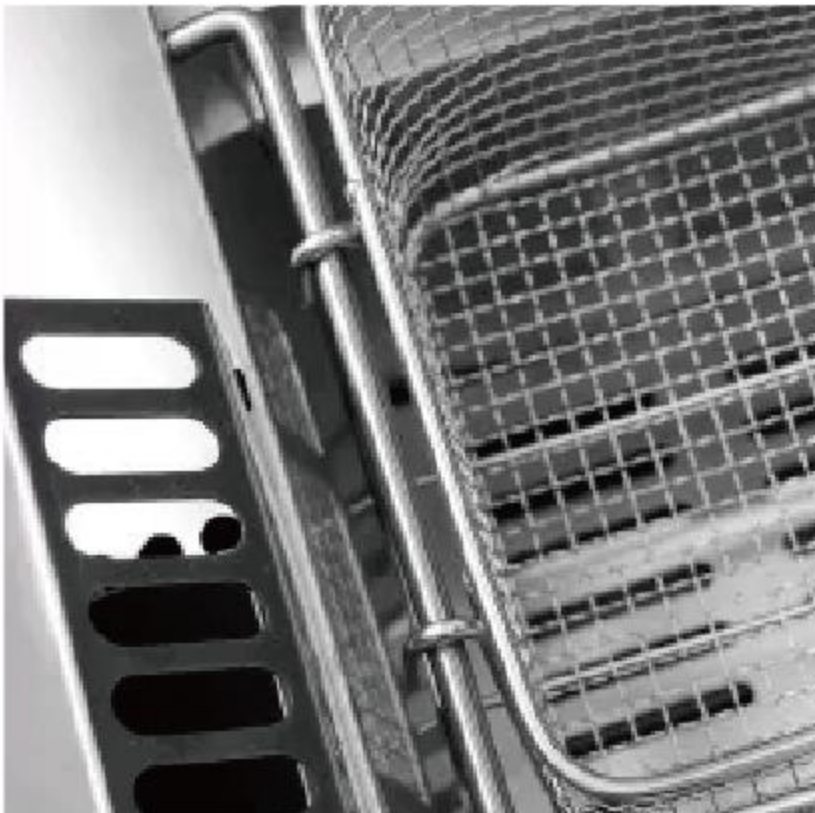

Nickel plating frying basket with handle for safe operation

MODEL GF-17H



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Stainless Steel Feet



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
MGF3	2800/2000Pa	LPG/Natural Gas	20	394*779*1137
MGF4			23	394*779*1137
MGF5			42	534*870*1137
GF-3F			28	400*800*1180

MODEL GF-3F



Gas Fryer

- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Flameout protection,automatically cut off gas under flame-out.
- Stainless steel 201 structure ensure longer life
- Durable Frying pan basket with handle
- Non-skid rubber feet prevent slipping



MODEL MGF3



MODEL PFE-24



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Build-in filtration system filters and returns hot oil ,no need handling of hot oil.
- Computer control panel intelligent control of temperature and time
- High-efficiency heat exchange system produces the lowest average exhaust gas temperatures to save energy.
- Working Pressure 8Psi



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
PFE-24	220~240V/ 50~60Hz	13.5	24	460*960*1230
PFE-600				
PFE-600L				
PFE-500				
PFE-800	3N~380V/50Hz	13.5	24	460*960*1230
PFG-25				
PFG-600				
PFG-600L				
PFG-500				
PFG-800				



PFE-600 PFG-600
GAS



PFE-600L PFG-600L
GAS



PFE-500 PFG-500
GAS



PFE-800 PFG-800
GAS

Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
PFE-16	220-240V/50-60Hz	3	16	380*470*530
PFE-16B			16	380*470*530
PFE-22			22	527*475*565

MODEL PFE-16



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change
- Working Pressure 8Psi



MODEL PFE-16B



Pressure Fryer

- Low temp&high pressure ensure the food taste and health
- Two button control time and temp,precise control operation
- Stainless steel BODY ensure longer life
- SMALL SIZE Does not take up much space
- Oil drip Easy oil change
- Working Pressure 8Psi



MODEL PFE-22



Commercial Electric&Gas Griddle



Electric Griddle


- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- Stainless steel 201 structure ensure longer life.
- Upgrade heating tube,rapid heatingdistribute heat evenly,bring you better cooking experience.
- Non-skid rubber feet prevent slipping.
- Products tested to meet EU standards(CE certifiaction).

OPTION


EG-1  EG-2  EG-3  EG-D 



Model	Voltage	Power(kW)	Size(mm)
EG-818	220-240V/50~60Hz	3	550*430*250
EG-818-2			
EG-818-3			
EG-818D			

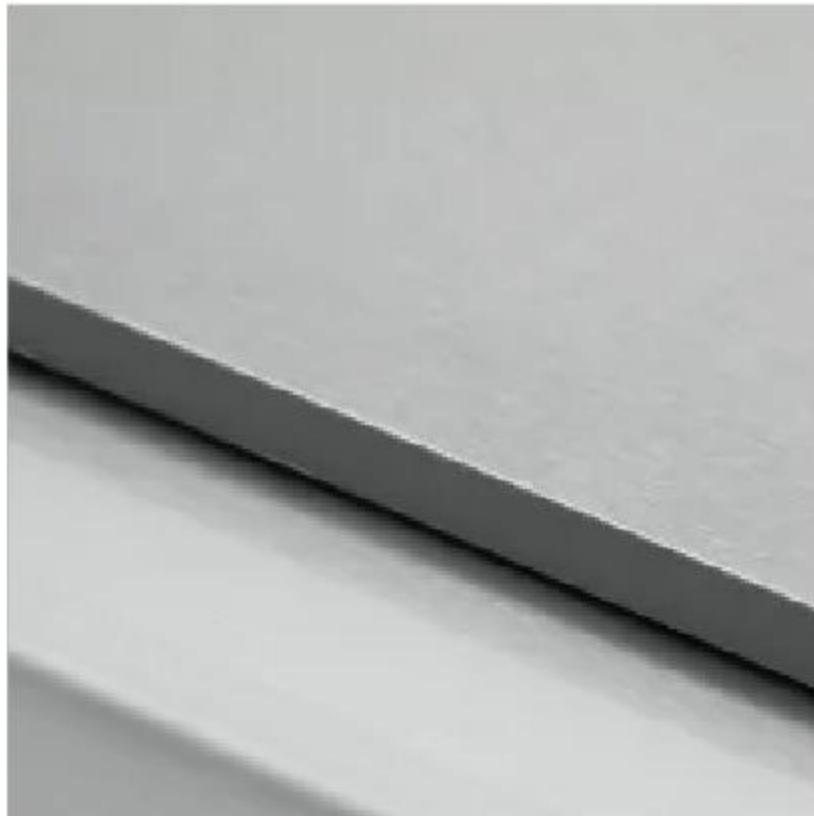

Stainless steel grilling board,Rustproof and easy to clean. Full smooth,Half ribbed half smooth,Full ribbed,Chrome heating plate can be chosen.

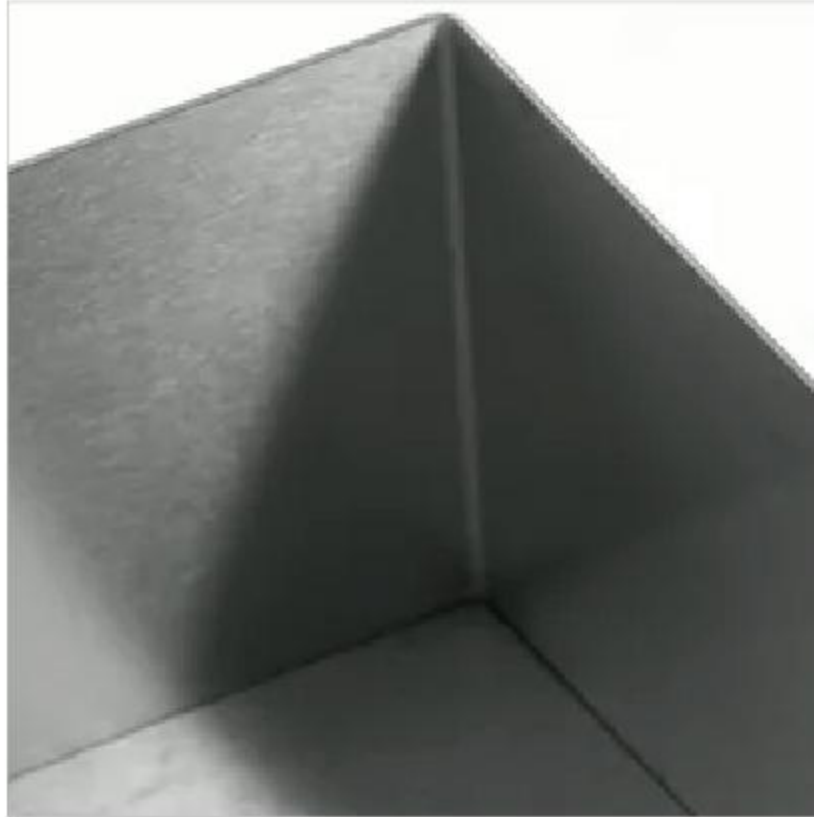

Heighten the apron to prevent oil splashing



Small drawer can collect residue and oil for easy cleaning.



Non-slip feet

MODEL EG-818



MODEL EG-818-2



MODEL EG-818-3



MODEL EG-818D




MODEL EG-360



Electric Griddle

- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- Stainless steel 201 structure ensure longer life.
- Upgrade heating tube,rapid heating distribute heat evenly,bring you better cooking experience.
- Non-skid rubber feet prevent slipping.
- Products tested to meet EU standards(CE certifiaction).

OPTION

EG-1  EG-2  EG-3  EG-D 

Model	Voltage	Power(kW)	Size(mm)
EG-360	220-240V/50~60Hz	2	360*450*220
EG-820		4.4	730*470*250
EG-548		3	555*475*220
EG-738		4.4	735*525*240



MODEL EG-548



MODEL EG-500



MODEL EG-738



MODEL EG-820



Electric Griddle

- Temperature range of 50 to 300 degrees Fahrenheit adjustable.
- **Stainless steel 201 structure** ensure longer life.
- **Upgrade heating tube**,rapid heating distribute heat evenly,bring you better cooking experience.
- **Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

EG-1

EG-2

EG-3

EG-D

Chrome



Model	Voltage	Power(kW)	Size(mm)
EG-500	220-240V/50~60Hz	3	500*520*330
EG-600		3	600*520*330
EG-750		5	750*520*330
EG-1000		6	1000*520*330
EG-330	220-240V/50~60Hz	3	330*540*245
EG-660		6	660*500*310
EG-7070	380v/50hz	9	700*700*300

MODEL EG-330



MODEL EG-660




MODEL EG-7070



MODEL EG-600




Stainless Steel heating tube provide provide quick heat-up

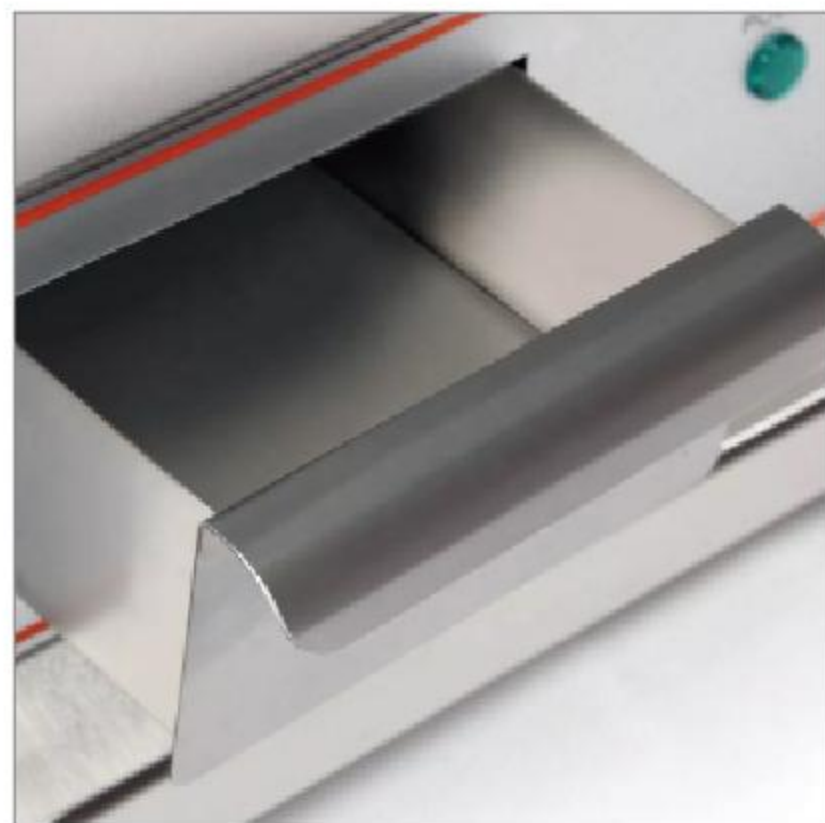

Stainless Steel heating tube provide provide quick heat-up

MODEL EG-1000

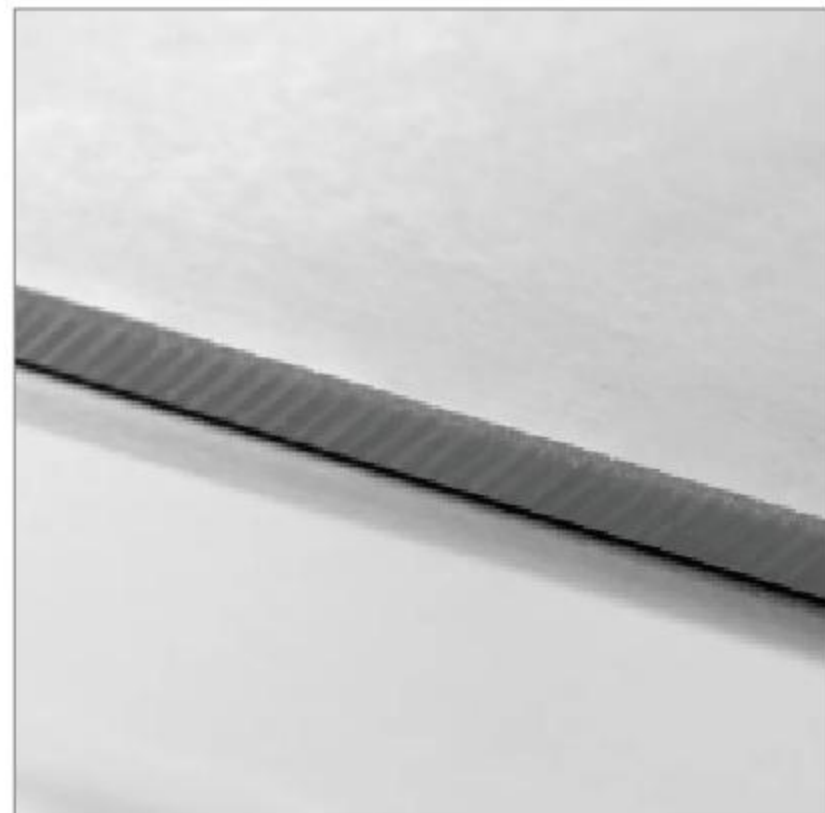

Stainless steel grilling board, rustproof and easy to clean.

Electric Griddle



- One **U-shaped burner** per 12" (30 cm)
- Professional safety valve with **flameout protection** makes **ignition safer**
- **Temperature control range** 93 °C-232 °C
- 1"thickness grilling board
- **Large front desk**, good for quick cooling
- 4 inch height adjustable **stainless steel feet**
- **Large size oil receiving box** with oil spill hole and inner baffle

OPTION

EG-1

EG-2

EG-3

EG-D

Chrome

MODEL EG-36"




MODEL EG-24"




MODEL EG-48"



300 °C Thermostat, 351 °C temperature limiter and indicator light for easy control of grilling plate temperature.

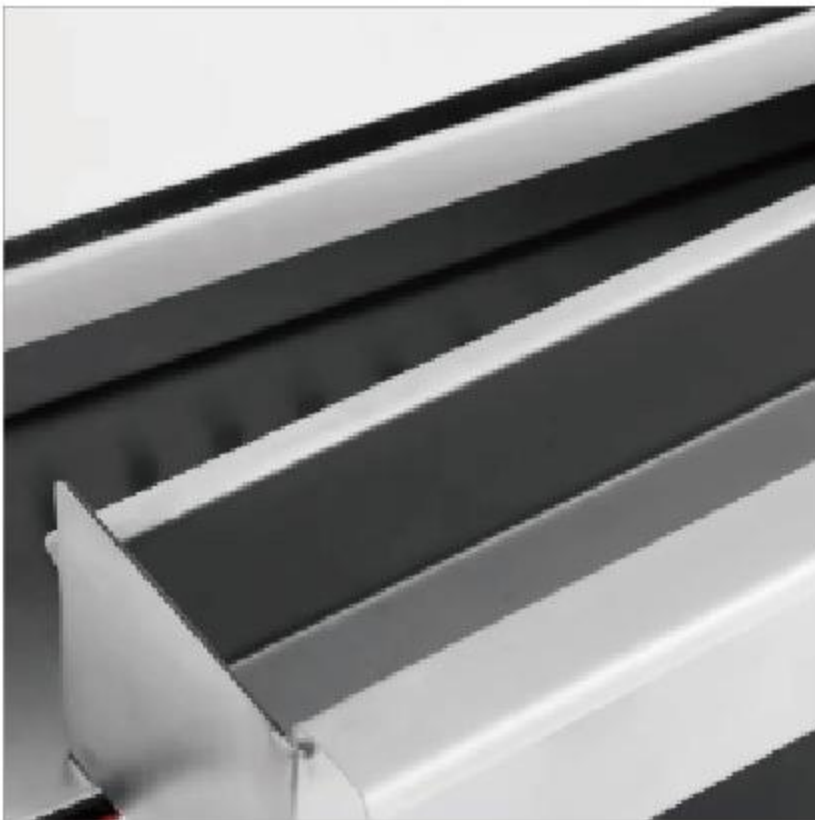

Small drawer can collect residue and oil for easy cleaning.

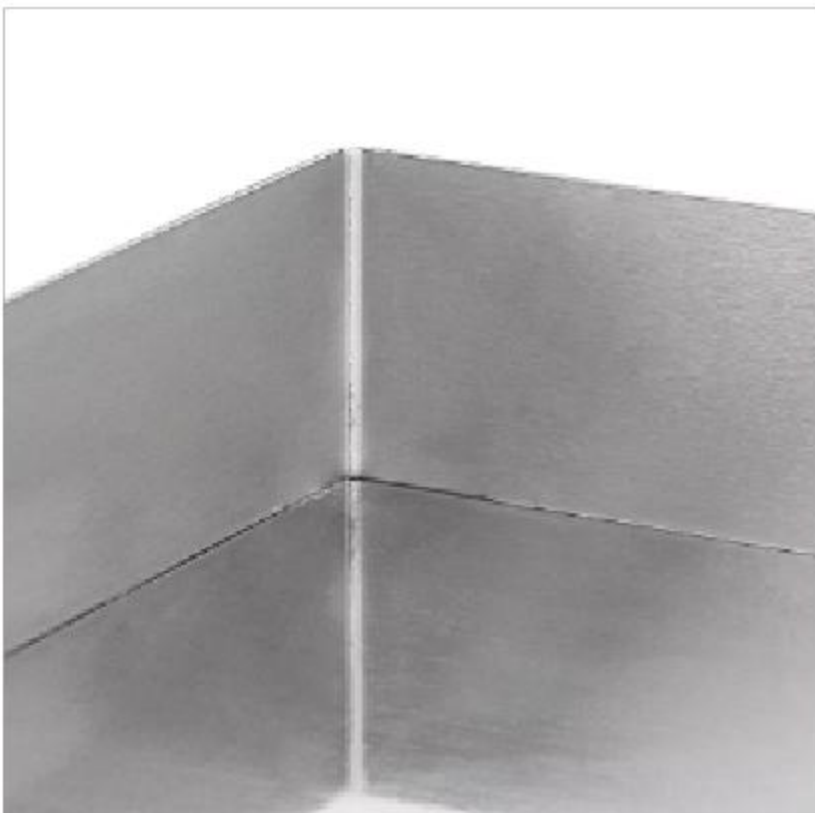

Heighten the apron to prevent oil splashing

MODEL EG-818D



OPTIPN

EG-1

EG-2

EG-3

EG-D

Model	Voltage	Power(kW)	Size(mm)
EGN-300D	220-240V/50~60Hz	2	300*400*260
EGN-550D		2.4	550*430*260
EGN-720D		4.4	720*460*260
EG-24"	220-240V/50~60Hz	6.7	873*610*394
EG-36"		10.05	873*914*394
EG-48"		13.4	873*1220*394

Gas Griddle



- Units ship **natural gas (NPG)** or liquid propane gas (LPG) (please specify when ordering).
- Flameout protection**,automatically cut off gas under flame-out.
- Stainless steel 201 structure** ensure longer life.
- Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

GG-1 GG-2 GG-3 GG-D Chrome

Model	Pressure	Used Gas	Size(mm)
GG-360	2800/2000Pa	LPG/Natural Gas	415*570*370
GG-500	2800/2000Pa	LPG/Natural Gas	555*570*370
GG-600			655*570*370
GG-750			805*570*370
GG-900	2800/2000Pa	LPG/Natural Gas	955*570*370
GG-1000			1000*580*345



Precise control of firepower, simple operation



Conveniently collect food residue and keep it tidy



Small drawer can collect residue and oil for easy cleaning



Can dissipate excess heat

MODEL GG-360



MODEL GG-600



MODEL GG-900



Gas Griddle

- Units ship **natural gas (NPG)** or liquid propane gas (LPG) (please specify when ordering).(please specify when ordering).
- Flameout protection**,automatically cut off gas under flame-out.
- Stainless steel 201 structure** ensure longer life.
- Non-skid rubber feet** prevent slipping.
- Products tested to meet **EU standards(CE certification)**.

OPTION

GGN-1 GGN-2 GGN-3 GGN-D Chrome



Model	Pressure	Used Gas	Size(mm)
GGN-500	2800/2000Pa	LPG/Natural Gas	500*580*305
GGN-600			600*580*305
GGN-1000			1000*580*305



Different gear knobs control fire power



Small drawer can collect residue and oil for easy cleaning



Conveniently collect food residue and keep it tidy



Heighten the apron to prevent oil splashing

MODEL GGN-500



MODEL GGN-600



MODEL GGN-1000



Commercial Panini Sandwich Grill

Panini Sandwich Grill

- Stainless steel dry burnable heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan

OPTION



PG-A: Full Ribbed



PG-B: Full Smooth



PG-C: Half smooth Half Ribbed



MODEL PG-812A PG-400



Specialized hinge ensures complete contact and uniform cooking



Removable grease tray it can be removed quickly for cleaning



Humanization Hot - proof handle easy to operate



Cast iron plate non-stick layer, high temperature resistance, easy cleaning

MODEL PG-811C



Model	Voltage	Power[kW]	Size[mm]
PG-811	220~240V/50~60Hz	1.8	305*365*210
PG-812		2.2	430*365*210
PG-400		2.2	435*410*210

Panini Sandwich Grill

- Stainless steel dry burnable heating tube provide quick heat-up
- Durable Frying pan basket with handle for safe operation
- Stainless steel 201 structure ensure longer life
- Lid prevents boiling oil from splashing
- Non-skid rubber feet prevent slipping
- Easy-to-remove oil pan


MODEL PG-812D



MODEL PG-813A



OPTION

-  PG-A: Full Ribbed
-  PG-B: Full Smooth
-  PG-C: Half smooth Half Ribbed



Model	Voltage	Power(kW)	Size(mm)
PG-812D	220~240V/50~60Hz	4.4	845*365*210
PG-813		3.6	565*365*210

MODEL PG-813B



MODEL GG-1102A



MODEL GG-1103A



MODEL GG-1102B




Gas BBQ Grill

- Units ship **natural gas (NPG)** or **liquid propane gas (LPG)** (please specify when ordering).
- **Flameout protection**,automatically cut off gas under flame-out.
- **Stainless steel 201 structure** ensure longer life.
- **Upgrade heating tube**,distribute heat evenly,bring you better cooking experience.
- **Non-skid rubber feet** prevent slipping.
- Each machine undergoes **air leak test** before delivering to ensure customer safety.



Product details

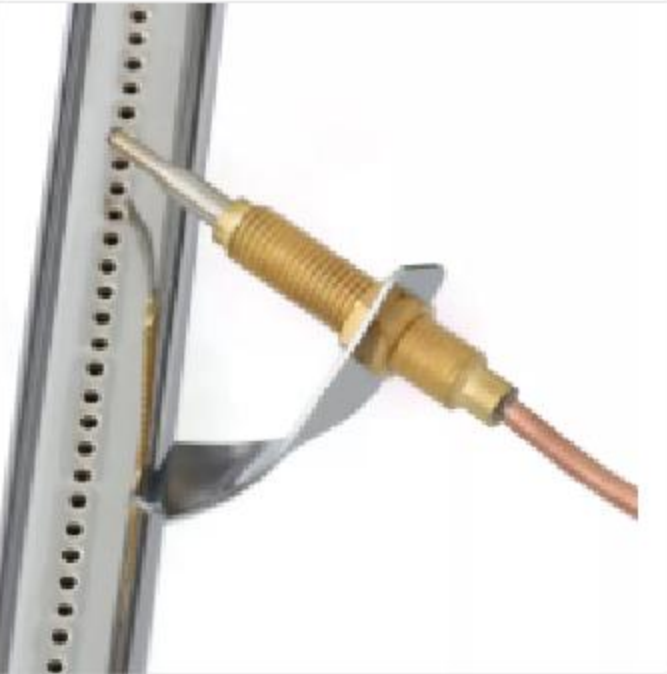

Model	Bumer	Heat Input(kw)	Used Gas	Size(mm)
GG-1102A	2pcs	10	LPG Or Natural Gas	700*560*310
GG-1103A	3pcs	10		
GG-1102B	2pcs	10		
GG-1103B	3pcs	10		

MODEL GG-1103B



New Design



Gas Griddle

MODEL MGG12-M

- per 12 "(30 cm) a U-shaped burner, a normally upright fire
- 3/4" thickness grilling board
- **Large front desk**, good for quick cooling
- 4 inch height adjustable **stainless steel feet**
- **Large size oil receiving box** with oil spill hole and inner baffle



Model	Pressure	Used Gas	Size(mm)
MGG12-M	2800/2000Pa	LPG/Natural Gas	305*830*393
MGG24-M			610*830*393
MGG36-M			915*830*393
MGG12-MF			305*830*900
MGG24-MF			610*830*900
MGG36-MF			915*830*900



MGG12-MF MGG24-MF MGG36-MF

Gas Lava Rock Grill

MODEL MGL12-M



- One **U-shaped burner** per 12" (30 cm)
- Normal open flame **manual ignition**
- **Large front desk**, good for quick cooling
- 4 inch height adjustable **stainless steel feet**
- Full size **slag tray**



Model	Pressure	Used Gas	Power(kW)	Size(mm)
MGL12-M	2800/2000Pa	LPG/Natural Gas	10.3	305*830*388
MGL24-M			20.6	610*830*388
MGL36-M			30.9	915*830*388
MGL12-MF			10.3	305*830*900
MGL24-MF			20.6	610*830*900
MGL36-MF			30.9	915*830*900



MGL12-MF MGL24-MF MGL36-MF



Gas Burner

MODEL GB-1




- Stainless steel 201 structure ensure longer life
- Flameout protection, automatically cut off gas under flame-out.
- Electronic ignition needle, high-quality combustion valve
- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Control the flame easily by adjusting the damper
- Stainless steel feets, safe and firm

OPTIPN

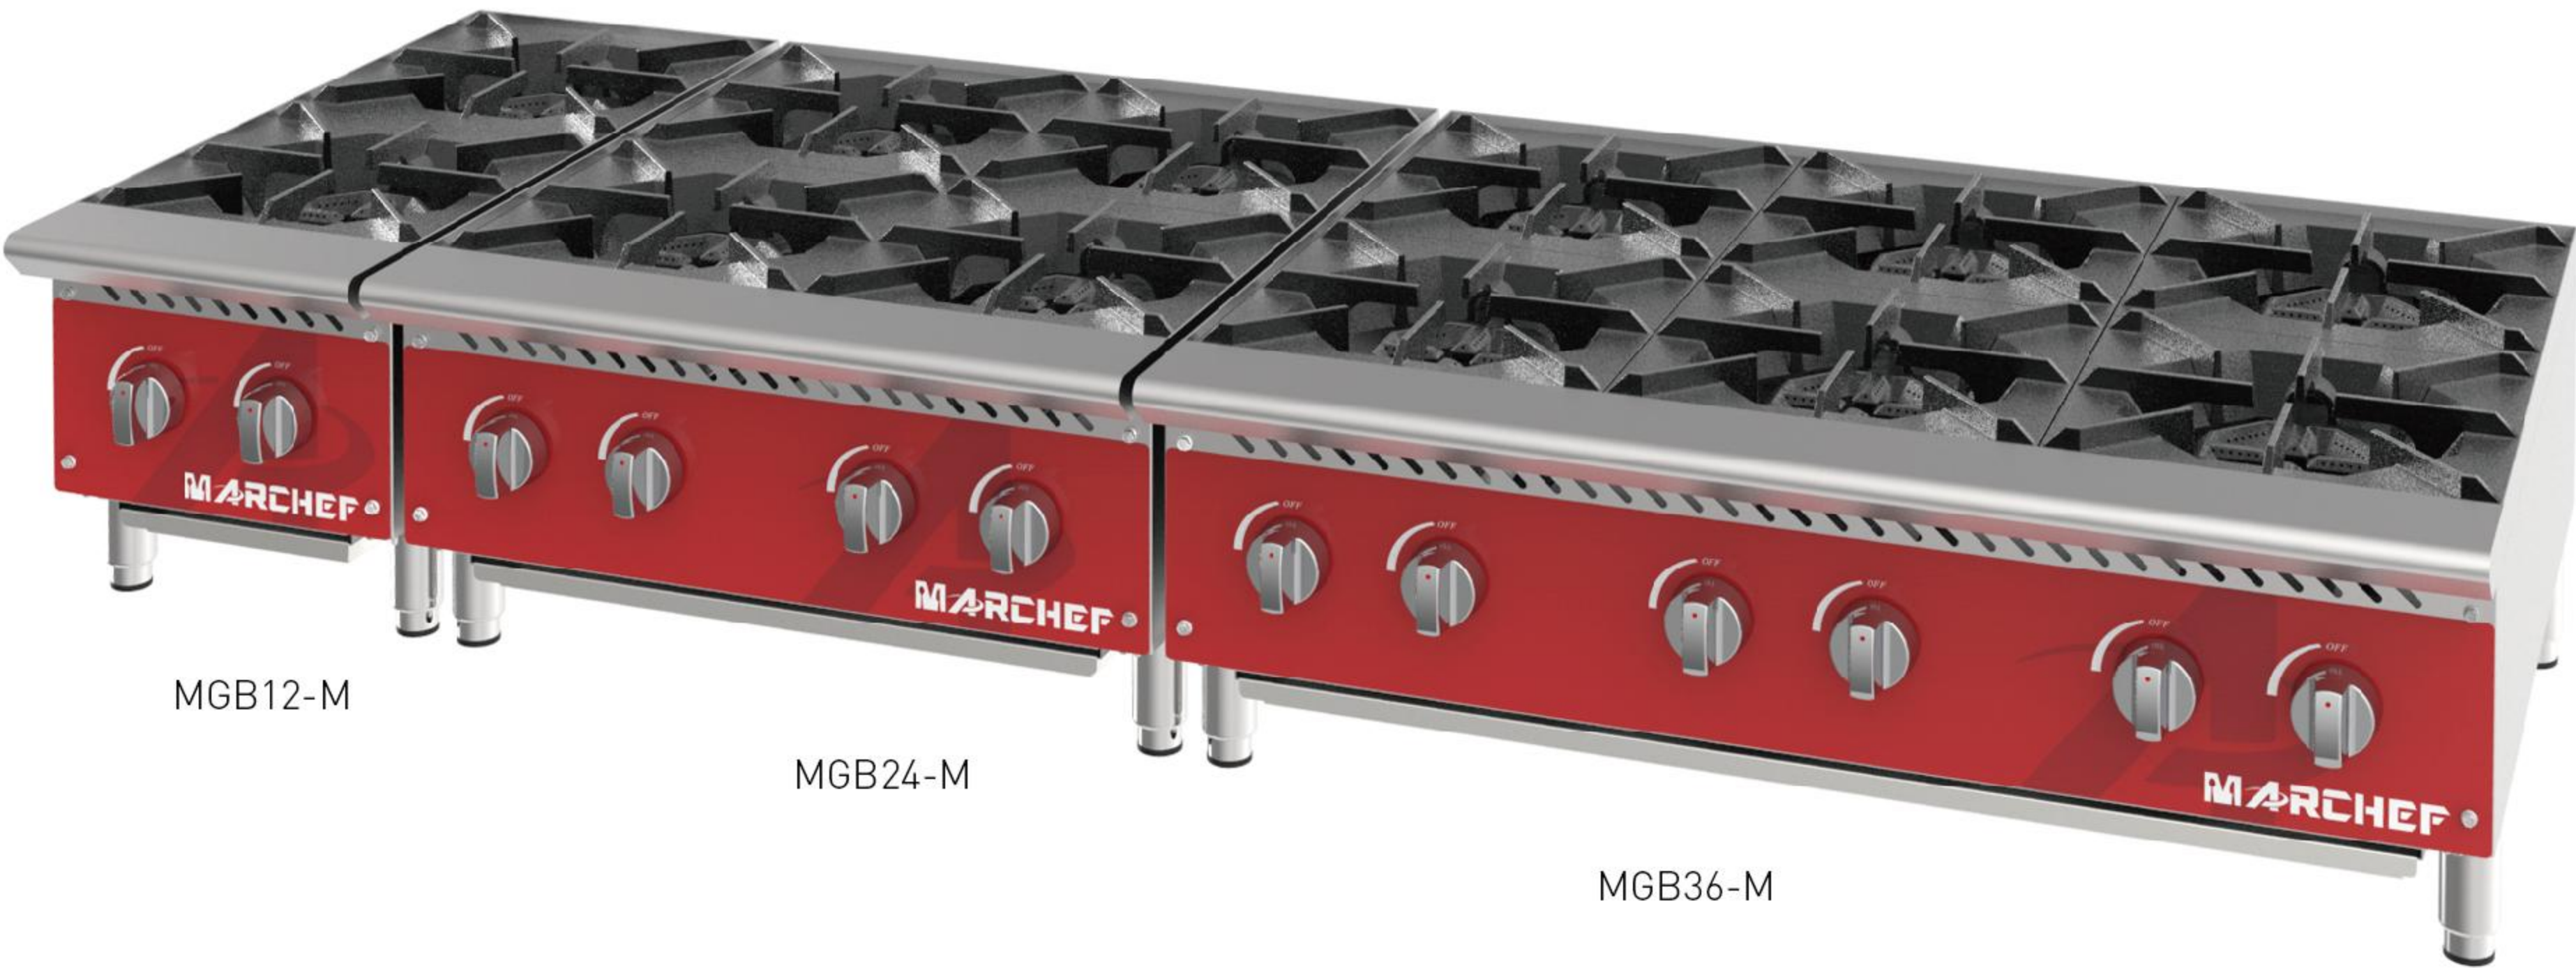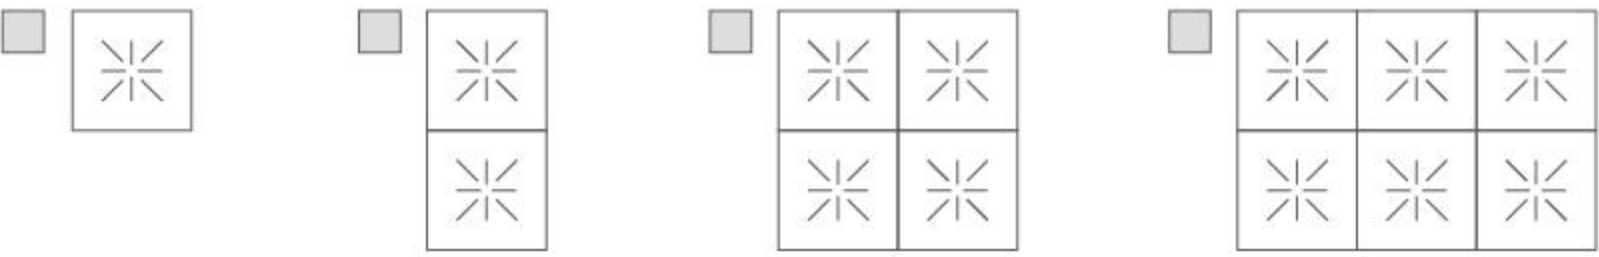

Model	Pressure	Used Gas	No. of Burners	Size(mm)
GB-1	2800/2000Pa	LPG/Natural Gas	1	650*456*660
GB-2			2	1350*456*660
MGB12-M			2	305*830*328
MGB24-M			4	610*830*388
MGB36-M			6	915*830*328
MGB12-MF			2	305*830*900
MGB24-MF			4	610*830*900
MGB36-MF			6	915*830*900

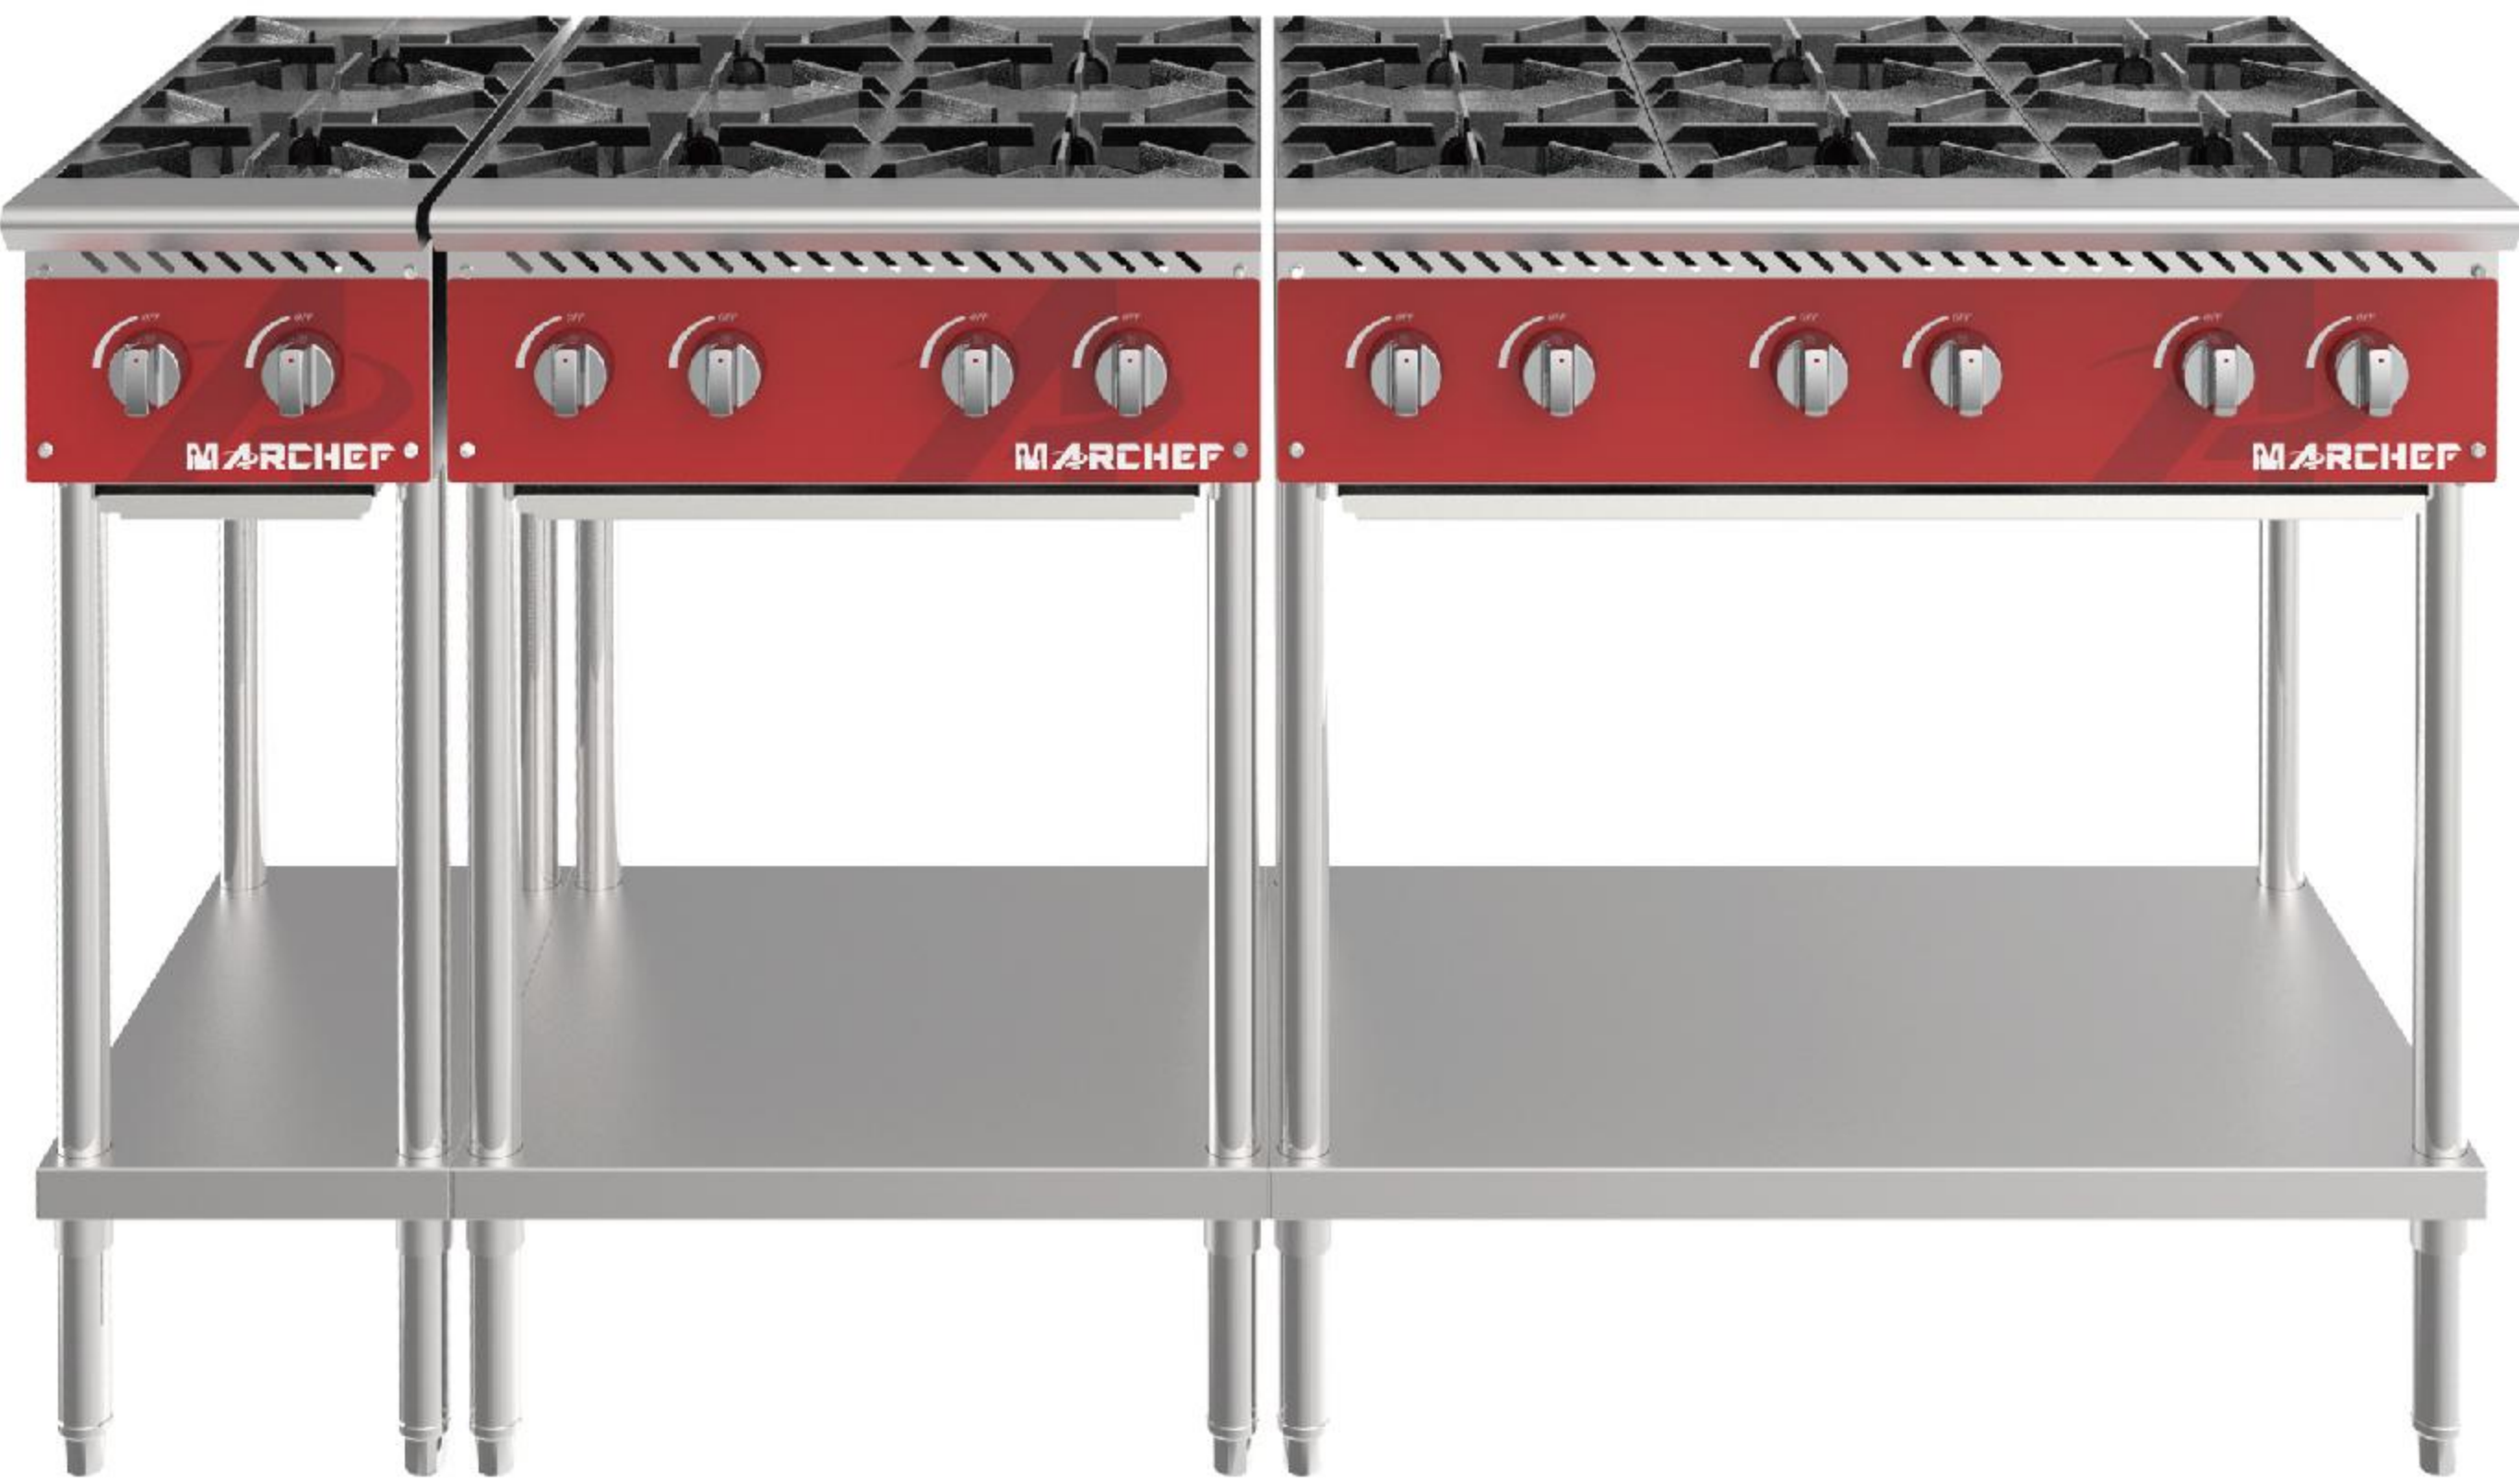

MGB12-MF MGB24-MF MGB36-MF

Gas Burner

- Stainless steel 201 structure ensure longer life
- Flameout protection,automatically cut off gas under flame-out.
- Electronic ignition needle, high-quality combustion valve
- Units ship natural gas or liquid propane gas (LPG) (please specify when ordering)
- Control the flame easily by adjusting the damper
- Stainless steel feets, safe and firm

OPTIPN

✱

✱

✱

✱

✱

✱

✱

✱


✱

✱

✱



Model	Pressure	Used Gas	No. of Burners	Size(mm)
GB-2T	2800/2000Pa	LPG/Natural Gas	2	700*450*400
GB-2H			2	670*400*400
GB-3T			3	1040*450*400
GB-4T			4	700*790*400

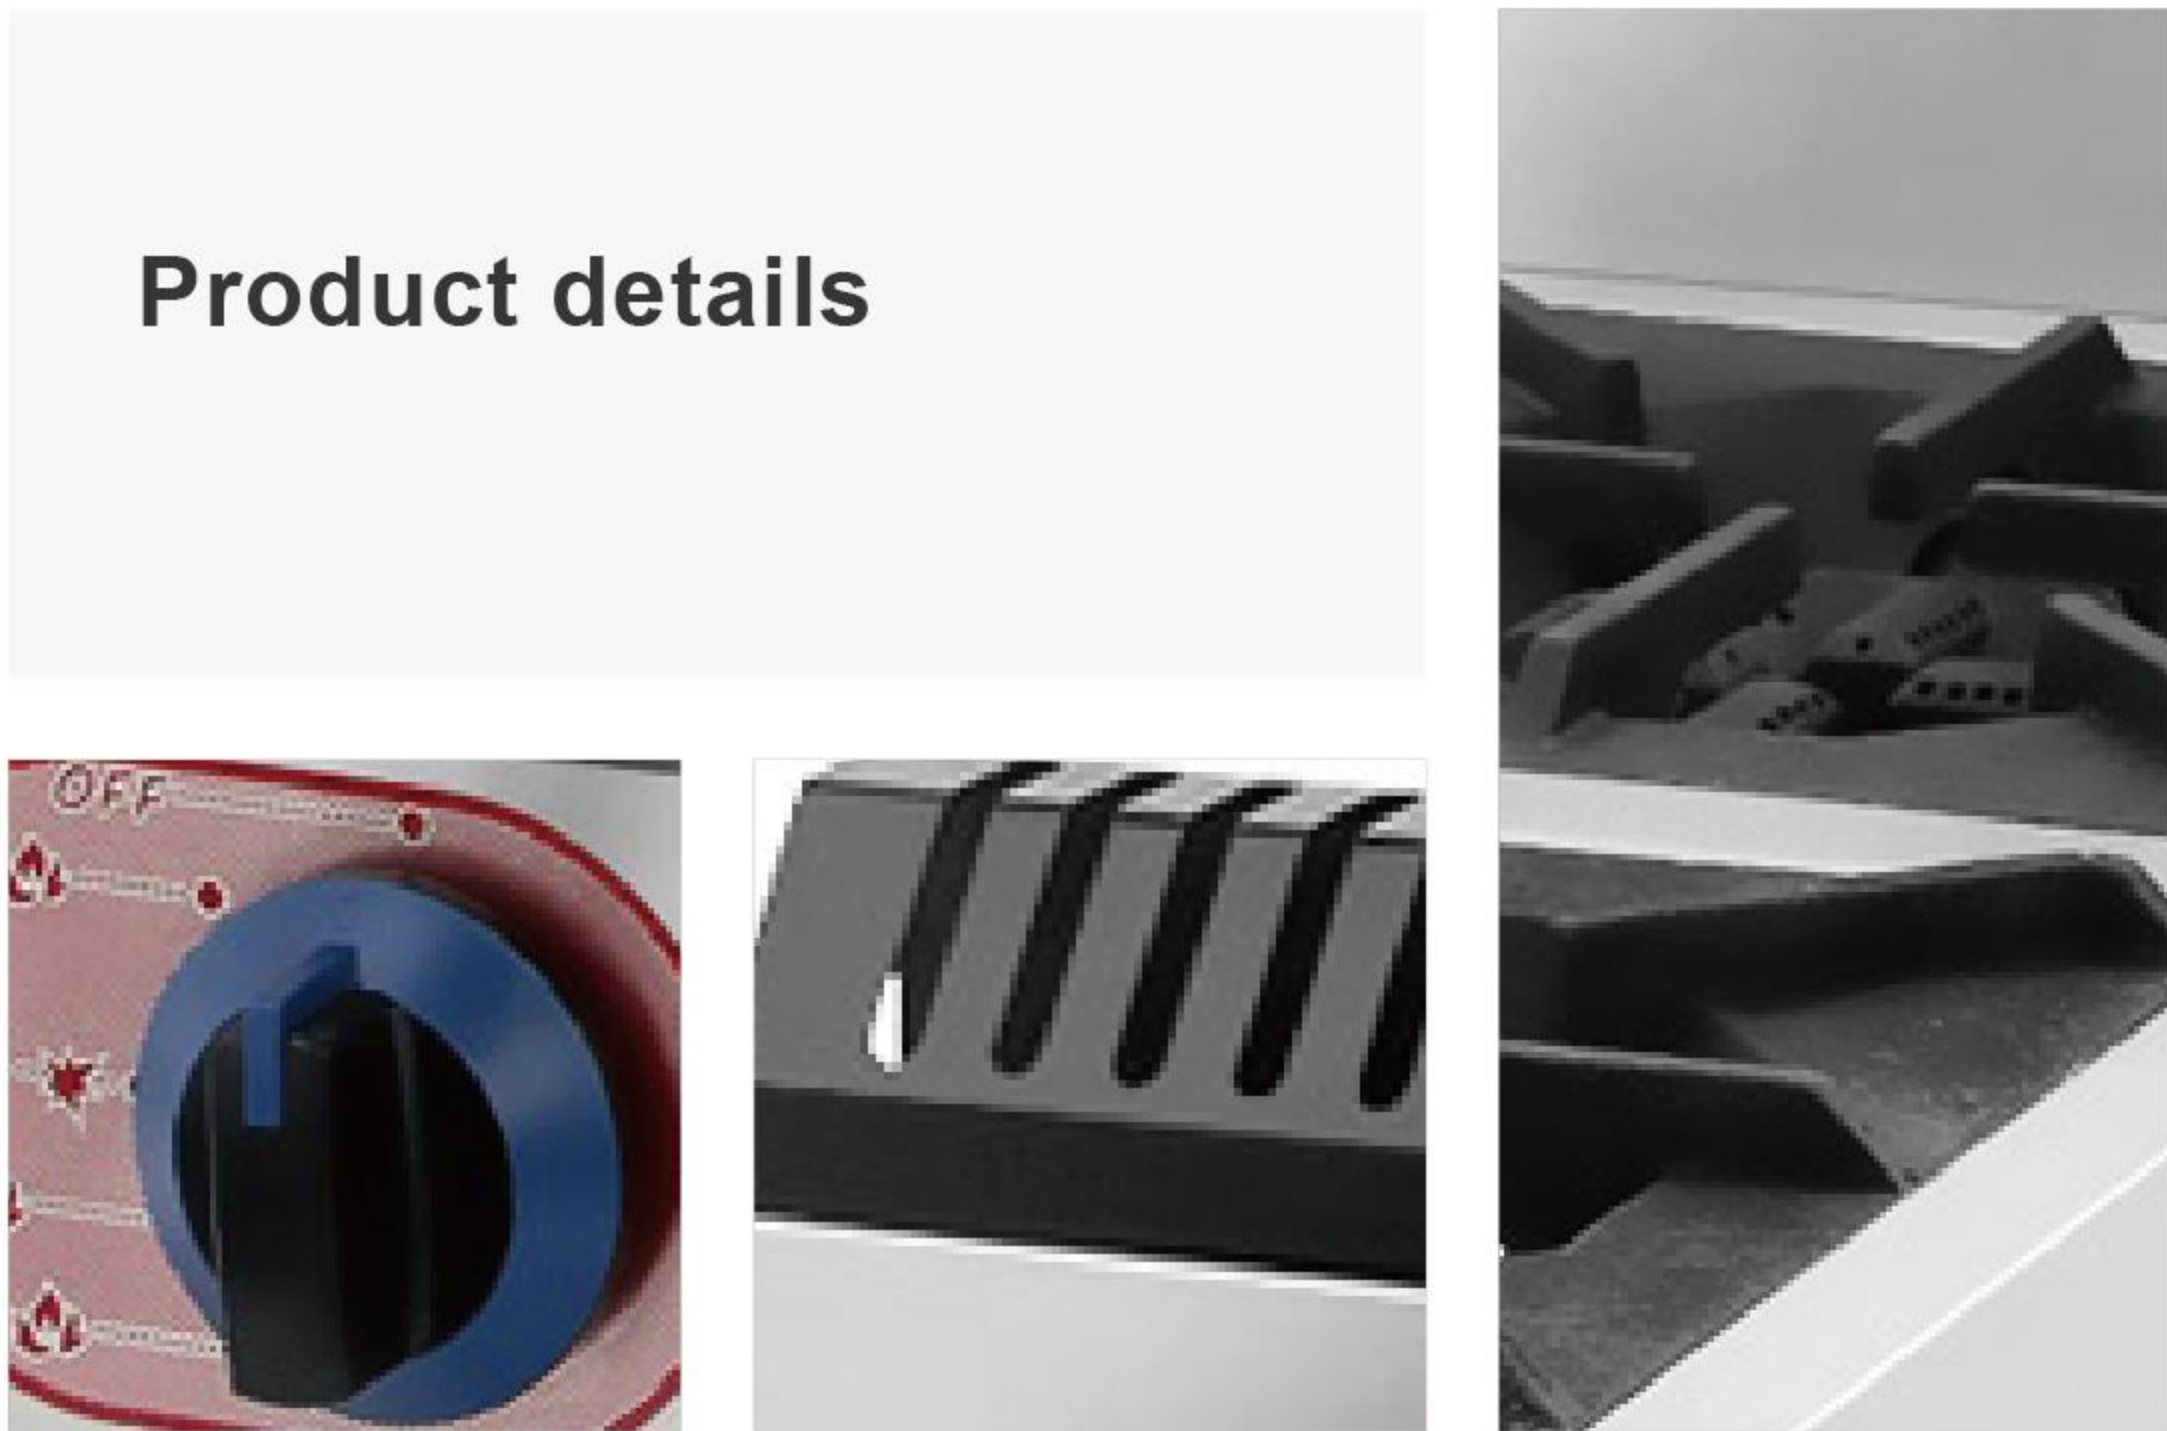

MODEL GB-4T



MODEL GB-2H



MODEL GB-2T



MODEL GB-3T



Electric Salamander

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust SS201 structure ensure longer life
- Green light indicates power on; Orange light indicates heating
- Lifting design can be adjusted up and down at will, which is convenient for roasting delicious food.
- Heat dissipation hole can efficiently thermally heat and lengthen service life
- Large area barbecue location easily deal with the large passenger flow, so that customers will not wait long.
- Non-skid rubber feet prevent slipping



Model	Voltage	Power(KW)	Size(mm)
ES-450L	220-240V/50~60Hz	2.8	450*520*520
ES-600L		4	600*520*520
ES-800L		5.6	800*520*520

Easily adjust the temperature 50-300 C

Push-pull tray and cooking grate,easy to use and clean,safer

Effectively prevent burns,sim-ple and convenient operation

6 sides heat dissipation,built-in thermal insulation layer,circu-lating heating, Safer and more energy-asving

MODEL ES-450L



MODEL ES-600L



Electric Salamander

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust SS201 structure ensure longer life
- Green light indicates power on; Orange light indicates heating
- Lifting design can be adjusted up and down at will, which is convenient for roasting delicious food.
- Heat dissipation hole can efficiently thermally heat and lengthen service life
- Large area barbecue location easily deal with the large passenger flow, so that customers will not wait long.
- Non-skid rubber feet prevent slipping

MODEL QTO-260



MODEL ES-938



MODEL ES-936



Model	Voltage	Power(KW)	Size(mm)
ES-936	220-240V/50~60Hz	2	610*350*280
ES-937		4	790*495*460
ES-938		2.2	580*435*380
QTO-240		2.4	440*300*290
QTO-260		2	440*280*310
QTO-360		3.6	440*300*405



Model	Voltage	Power(kW)	Size(mm)
MET-150	220-240V/50~60Hz	1.5	288*418*387
MET-300		2.45	368*418*387
MET-450		2.6	468*418*387
ET-4		1.8	315*270*220
ET-6		2.5	468*418*387



MODEL MET-450



Electric Toaster

- Antirust SS201 structure ensure longer life
- U-shaped heating tube provide more quick and evenly heat-up
- The design of front and back trays can be fully automatic bagging
- Heat sink can stabilize the internal temperature and prevent overheating
- Clear operation panel, simple and convenient


MODEL MET-300




MODEL ET-4




MODEL ET-6

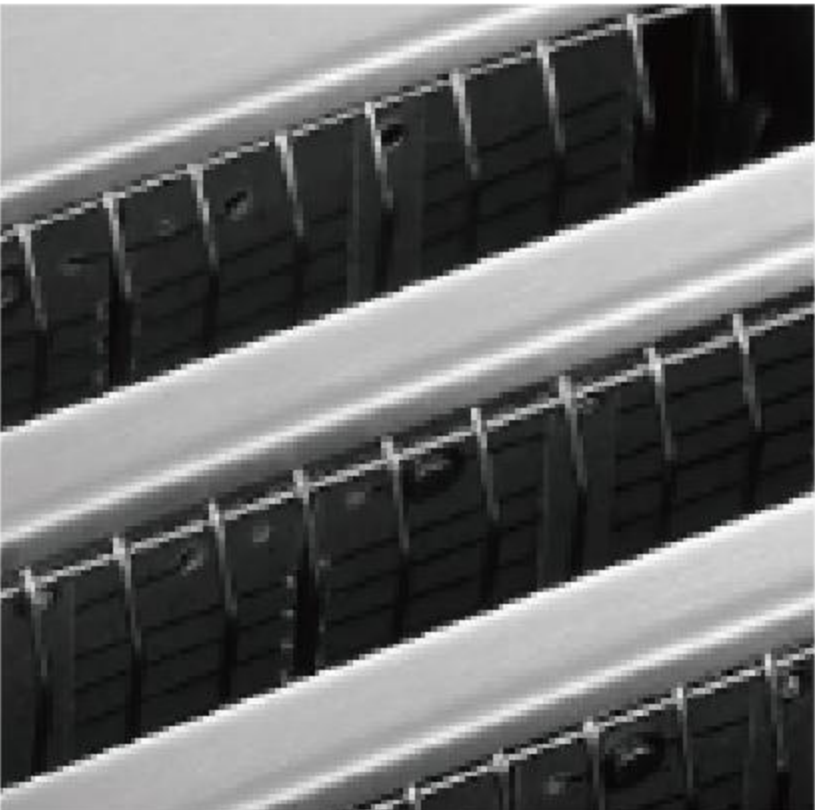

can meet the different thickness of bread baking

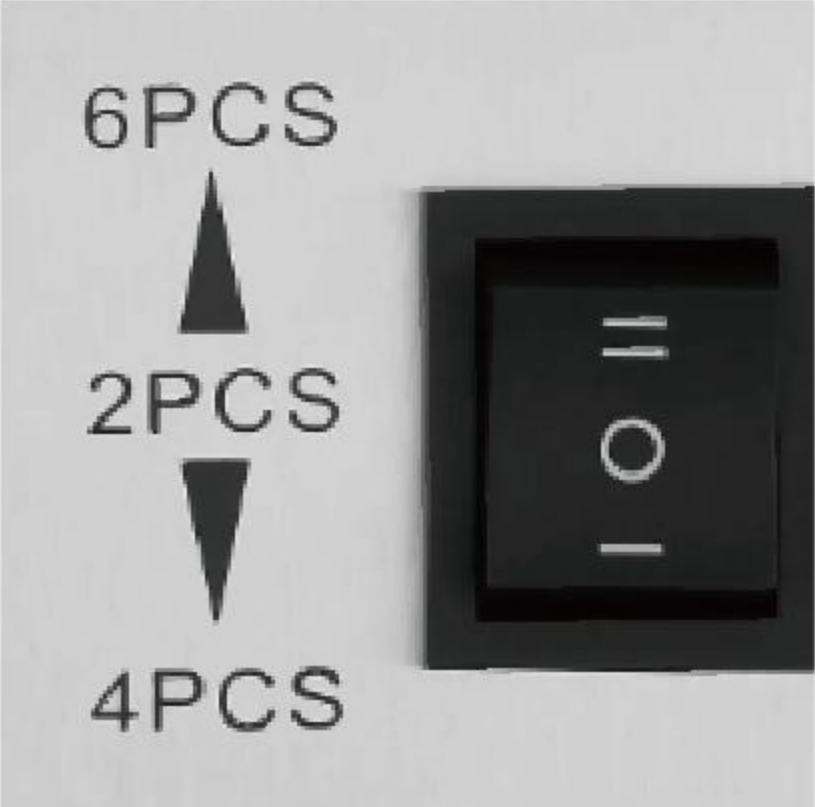

Simple operation, can choose the number of bread baking

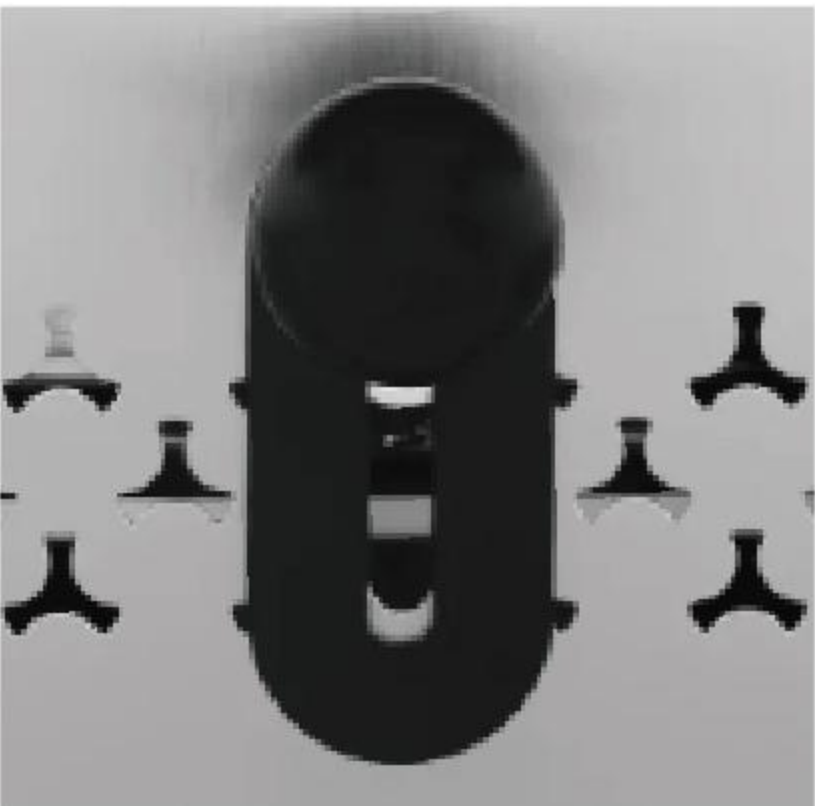

Jump up and down pressure bar, simple and convenient

Induction Cooker

CE ⚡

- Thick stainless steel body, oil-resistant, temperature-resistant and high-load-bearing
- The pure copper coil heats evenly and the firepower is super fierce
- Intelligent imported electronic components, energy saving and power saving
- Black crystal glass surface, high temperature resistance, non-slip and wear-resistant

Model	Voltage	Power(kW)	Size(mm)
IC-1	220-240V/50~60Hz	3.5	350*430*105
IC-35A			355*440*120
IC-35B			355*440*120
IC-50A		5	355*440*120
IC-50B			355*440*120

MODEL

IC-35A



IC-50A



IC-50B




IC-35B



Knob control, convenient operation



Can watch the temperature at any time

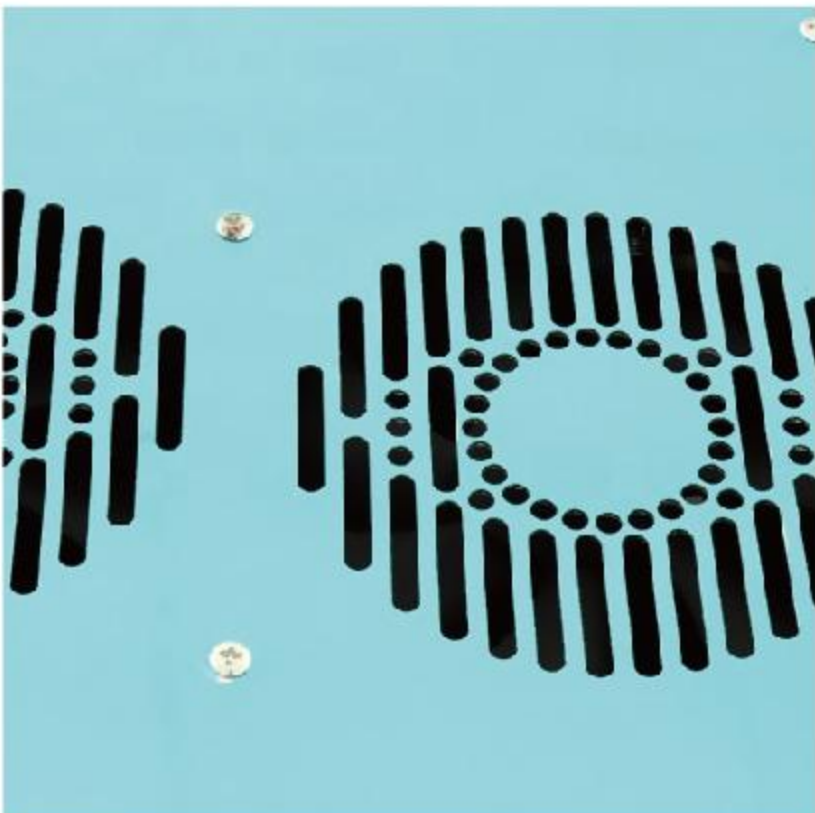

Can protect components and improve overall life

MODEL

IC-1



Electric Crepe Maker

CE ⚡ RoHS

- External shell and grease collector tray are stainless steel.
- Over-heat temperature controller for safety using.
- Grill temperaturesrills are designed may be set for different uses at the same time (double unit).
- Equipped with a rotary button for precise temperature control.

Model	Voltage	Power(KW)	Size(mm)
EC-1	220-240V/50~60Hz	3	450*490*220
EC-2		3+3	890*490*220
EC-1N		3	440*440*200

MODEL

EC-2



MODEL

EC-1



MODEL

EC-1N



Gas Crepe Maker

Model	Pressure	Used Gas	Size(mm)
GC-1	2800/2000Pa	LPG/Natural Gas	450*490*260
GC-2			890*490*260



Gas regulator to control the fire from Min to Max



Non-stick cooking plate

MODEL

GC-1



MODEL

GC-2



Hot Dog Bun Warmer

- Made of durable,easy care stainless steel
- With temperature controls holding 35-100 degress, it can cook,heat and hold freank furters and buns/bread rolls ready for customers
- Stainless steel bun warmers
- Brand now in box, no servicing and no installation required, just plug in and start to service
- Wet heat stainless pot



Model	Voltage	Power(kW)	Size(mm)
HDW-1	220-240V/50~60Hz	0.45	320*290*410
HDW-2		0.5	390*290*410
HDW-3		0.525	540*290*410
HDW-4		0.55	540*290*410
HDW-6		0.6	660*290*410
HDW-H4		0.2	305*300*315

MODEL HDW-H4




MODEL HDW-1



Adjustable 5 levels tempera-
ture thermostat



Use high-quality high-tem-
perature materials to prevent
burns

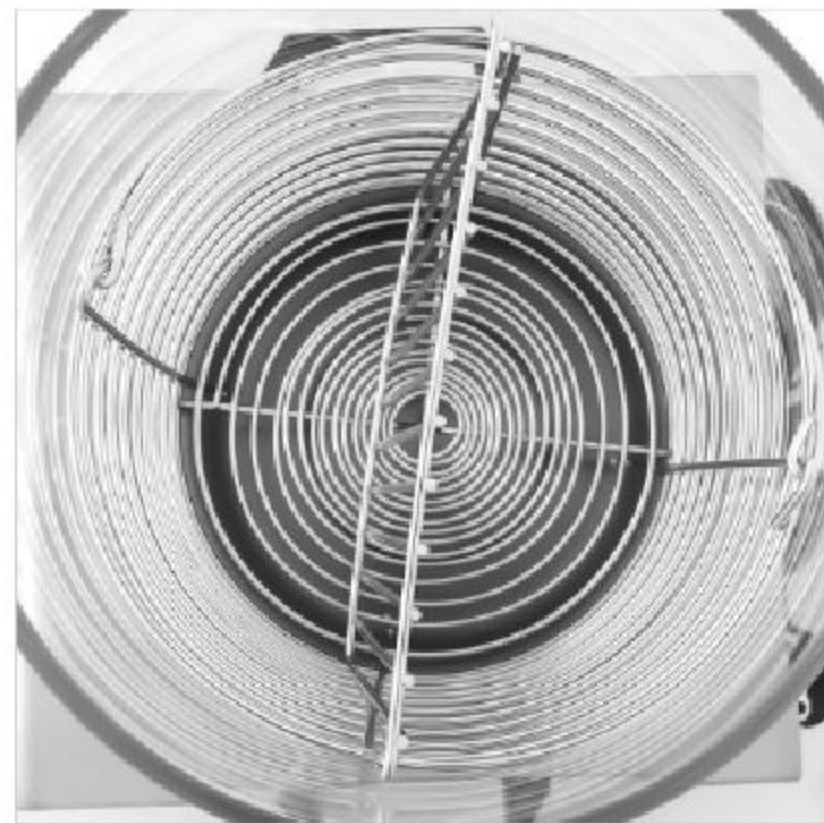

Waterproof heating, heat
preservation faster and more
uniform



Can accelerate the heating
speed of food, easy to use

MODEL HDW-2



MODEL HDW-3



MODEL HDW-4



MODEL HDW-6



Hot Dog Roller Grill

- Commercial quality stainless steel construction
- Non-stick rollers rotate 360 degrees for even cooking
- Cooks a variety of foods including franks, sausages, hot links and even breakfast sausages
- Removable and easy-to-clean stainless steel drip tray

Model	Voltage	No. of Rollers	Power(kW)	Size(mm)
HD-5	220-240V/50~60Hz	5	1	560*320*230
HD-7		7	1.4	560*385*200
HD-9		9	1.8	560*460*200
HD-5C		5	1	600*280*460
HD-7C		7	1.4	600*320*460
HD-9C		9	1.8	600*440*375
HDC-5		5	1	585*270*380
HDC-7		7	1.4	585*345*405
HDC-9		9	1.8	585*415*405
HDC-11		11	2.2	585*505*420


MODEL HD-5



MODEL HD-7C




MODEL HDC-7

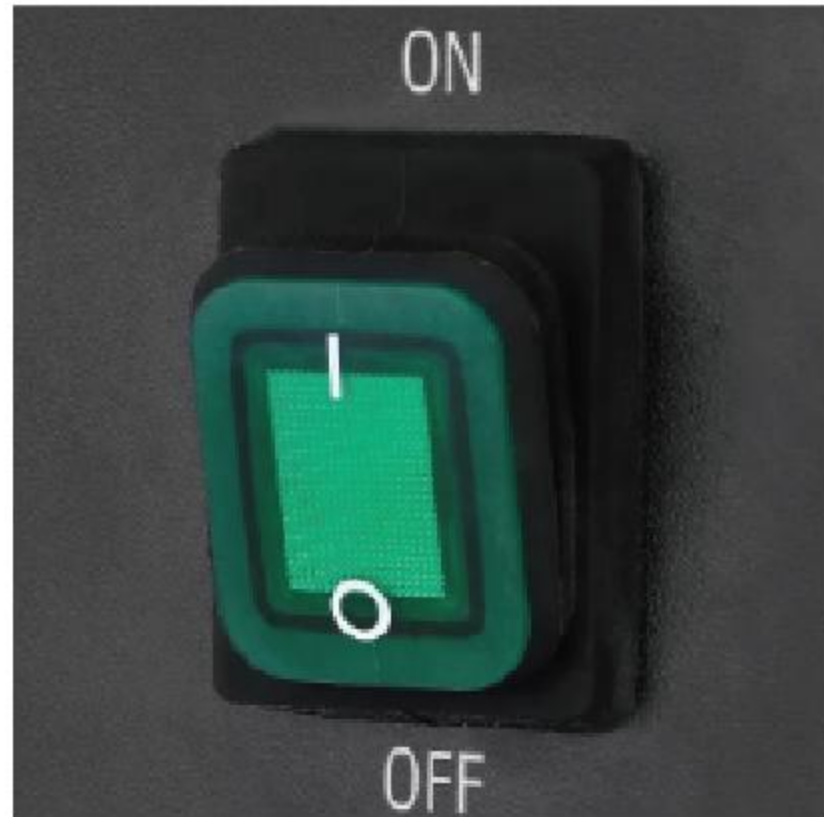

Quality switch can prolong the service life of the machine



Easily adjust the temperature 0-250°C

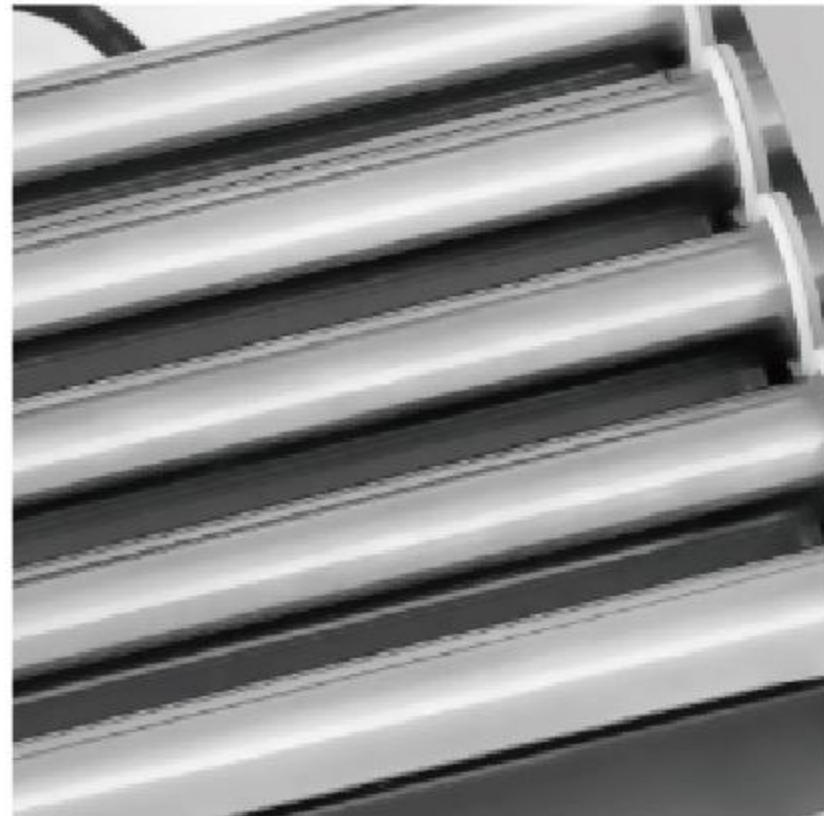

360° baking uniformly, attractive color



Can dissipate excess heat

Commercial Waffle Maker



Waffle Maker

- **Non-stick cooking grids** form perfectly cooked waffles in diameter without batter sticking.
- **Temperature adjusts** between **50°C and 300°C** to keep up with high-demand.
- **Cooking grids open 90 degrees** for easy product removal.
- **Green power light** indicates the unit is on; **Orange light** indicates pre-heating.



Model	Voltage	Power(KW)	Size(mm)
CB-1	220-240V/50~60Hz	1	255*380*270
CB-2		1+1	520*380*270
WF-2207		1	255*380*270
WF-2207-2		1+1	520*380*270



Non-stick Cooking grids provide variety of waffle shape



Cool-touch Handle
Convient cool-touch handles ensure safety



Thermostat
Easily adjust the temperature 50-300 °C



Timer
Set a time 0-5mins for reminder

MODEL CB-2



MODEL CB-1



MODEL WF-2207-2



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WFR: Reversible WF-D: Digital control panel

Model	Voltage	Power(kW)	Size(mm)
WF-1	220-240V/50~60Hz	1	255*380*270
WF-2		1+1	520*380*270
WF-6		1.4	225*420*290
WF-6D		1.1	500*250*260
WFR-1		1.3	538*250*313
WFR-2		1.3+1.3	500*445*260
WF-1RH		1.3	538*250*313
WF-1RHS		1.3	538*250*313



WFR-1



WF-2



WF-6



WF-6D

MODEL WF-1RHS



MODEL WF-1RH



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D: Digital control panel



Model	Voltage	Power(kW)	Size(mm)
WF-2204	220-240V/50~60Hz	2.2	445*345*240
WF-2206		1.75	300*400*230
WF-2205D		2.2	445*345*240
WF-2207D		2.2	320*490*270
WF-2208D		2.2	445*345*240
WF-2203		1.75	410*305*240



MODEL WF-2207D



MODEL WF-2203



MODEL WF-2208D



MODEL WF-2205D



MODEL WF-2204



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel

WF-J:Mirror



Model	Voltage	Power(kW)	Size(mm)
WF-2210	220-240V/50~60Hz	1.75	410*305*240
WF-2210J		1.75	410*305*240
WF-2210-2		1.75+1.75	620*371*250
WF-2210D-2		1.75+1.75	620*371*250
WF-115		1.5	380*270*235
WF-2212		1.75	250*355*235



MODEL WF-2210J



MODEL WF-2210-2



MODEL WF-115



MODEL WF-2212



MODEL WF-2210D-2



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel
WF-CC:Upper hot plate



Model	Voltage	Power(kW)	Size(mm)
WF-4	220-240V/50~60Hz	2	250*380*245
WF-6S		2	250*380*245
WF-7XC		1.75	410*305*240
WF-7CC		1.75	410*305*240
WF-10		1.55	390*340*245



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-J:Mirror



Model	Voltage	Power(kW)	Size(mm)
WF-007J	220-240V/50~60Hz	1.1	260*400*200
WF-009J		0.9	290*420*180
WF-215		1.5	310*440*235
WF-113		1.55	390*340*245
WF-114		1.55	390*340*245



MODEL WF-6S



MODEL WF-7XC



MODEL WF-007J



MODEL WF-113



MODEL WF-7CC



MODEL WF-10



MODEL WF-215



MODEL WF-114



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-J:Mirror

Model	Voltage	Power(kW)	Size(mm)
WF-2209	220-240V/50~60Hz	1.75	410*305*240
WF-2211		1.5	330*390*260
WF-117		1.55	360*340*245
WF-118		1.55	390*340*245
WF-216		1.5	390*340*245
WF-219		1.5	390*340*245
WF-005J		1.34	460*260*200



MODEL WF-2209

Waffle Maker


- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel WF-J:Mirror

Model	Voltage	Power(kW)	Size(mm)
WF-210	220-240V/50~60Hz	1.55	360*340*245
WF-223		1.55	390*340*245
WF-228		1.55	390*340*245
WF-5DM	220-240V/50~60Hz	1.55	360*330*245
WF-6DM		1.55	360*330*245
WF-12DM		1.55	360*330*245
WF-003J	220-240V/50~60Hz	1.1	485*250*210
WF-002J		1.55	470*255*160
WF-13J	220-240V/50~60Hz	1.3	460*255*180



MODEL WF-210

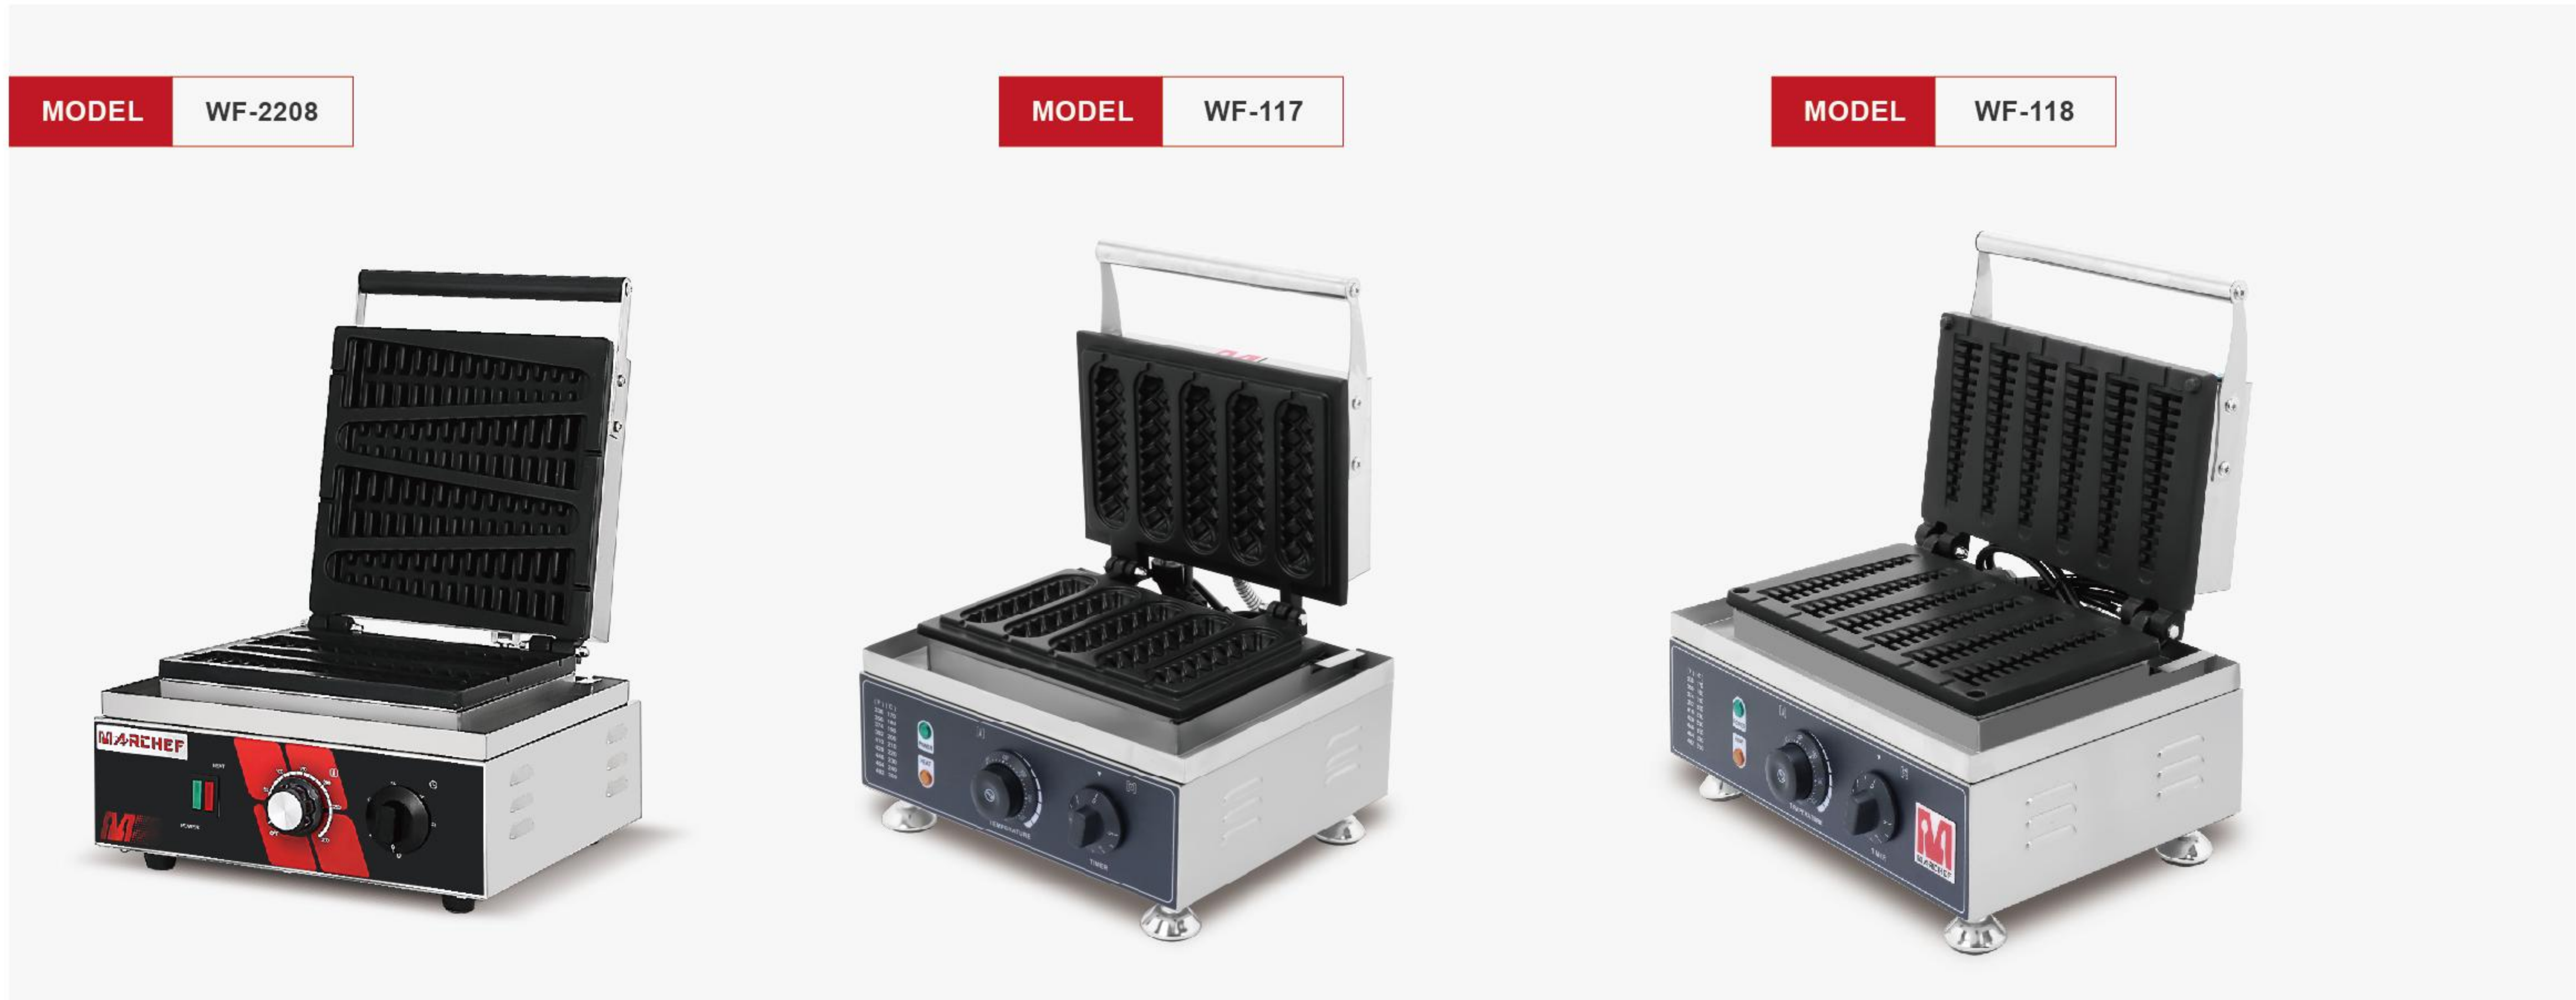

MODEL WF-2208

MODEL WF-117


MODEL WF-118



MODEL WF-223

MODEL WF-228

MODEL WF-12DM

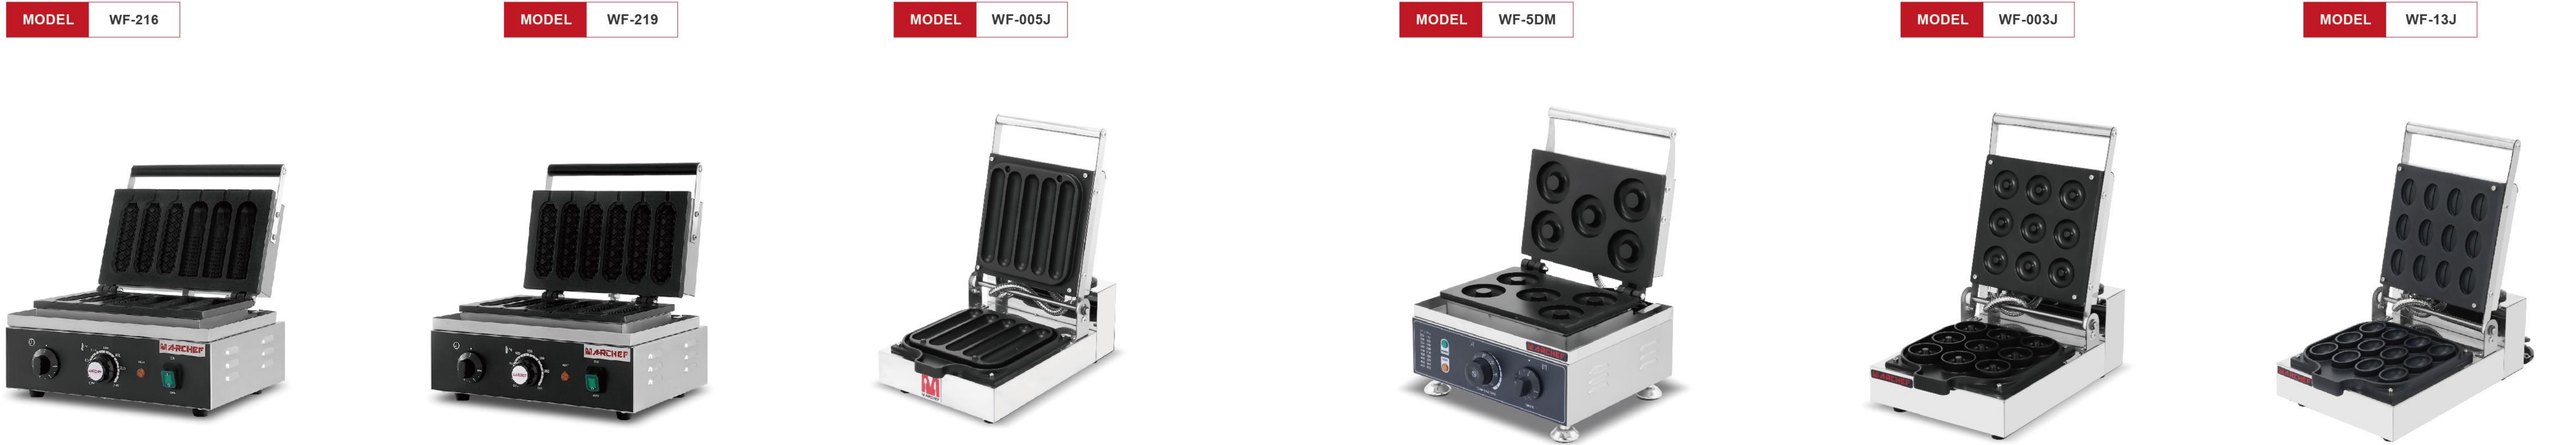

MODEL WF-216

MODEL WF-219

MODEL WF-005J

MODEL WF-5DM

MODEL WF-003J

MODEL WF-13J

Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-11	220-240V/50~60Hz	1.75	410*305*240
WF-14		1.75	410*305*240
WF-2240		1.75	410*305*240
WF-2247		2.6	362*382*240
WF-2248		1.75	410*305*240

MODEL WF-11



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-25	220-240V/50~60Hz	0.85	320*300*180
WF-36		1	485*395*240
WF-50		3	550*600*180
WF-100		3	670*670*220
WF-2249		0.85	320*340*180
WF-2245		0.85	375*300*170
WF-2246		3	550*600*180

MODEL WF-36



MODEL WF-2240



MODEL WF-14



MODEL WF-2247



MODEL WF-2248



MODEL WF-25



MODEL WF-50



MODEL WF-100



MODEL WF-2249



MODEL WF-2245



MODEL WF-2246



MODEL WF-315



Model	Voltage	Power(kW)	Size(mm)
WF-315	220-240V/50~60Hz	1.4	350*390*190
WF-442		2	350*525*307
WF-445		2	500*400*230
WF-1110		1.5	380*380*260
WF-1110D		1.5	380*380*260

WF-D:Digital control panel

Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.



Model	Voltage	Power(kW)	Size(mm)
WF-1114	220-240V/50~60Hz	1.5	380*380*260
WF-1114D		1.5	380*380*260
WF-443		1.5	380*380*260
WF-443D		1.5	380*380*260

WF-D:Digital control panel

MODEL WF-1110D



MODEL WF-442



MODEL WF-1114



MODEL HT-1114D



MODEL WF-1110



MODEL WF-445



MODEL WF-443



MODEL WF-443D



Waffle Maker

- Non-stick cooking grids form perfectly cooked waffles in diameter without batter sticking.
- Temperature adjusts between 50°C and 300°C to keep up with high-demand.
- Cooking grids open 90 degrees for easy product removal.
- Green power light indicates the unit is on; Orange light indicates pre-heating.

WF-D:Digital control panel

CERoHS

Model	Voltage	Power(kW)	Size(mm)
WF-1101A-D	220-240V/50~60Hz	3	380*550*260
WF-1101A		3	380*550*260
WF-1103A		1.5	380*380*260
WF-1103A-D		1.5	380*380*260
WF-1103B		2	440*425*285
WF-1106		1.5	380*380*260
WF-1106D		1.5	380*380*260
WF-1109		3	600*380*300



Popcorn Maker

- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Explosion-proof glass door is detachable, with good light transmission, high temperature resistance and sanitation



Model	Voltage	Power(kW)	Size(mm)
PC-801	220-240V/50~60Hz	1.4	500*360*680
PC-802		1.4	560*420*750
PC-06B		1.35	500*360*680
PC-08B		1.35	500*400*710
PC-808A		2.9	860*420*730
PC-803		1.4	920*370*1530
DH-11		0.4	450*450*570

MODEL PC-802



PC-06B



PC-808A



DH-11

Candy Floss Maker

- Stainless Steel heating tube provide more quick heat-up
- Antirust stainless steel 201 structure ensure longer life
- Stainless steel tray is large and strong to prevent the sugar wire from being turned out
- Stainless steel sugar spoon, convenient to put sugar, safe and sanitary



Model	Voltage	Power(kW)	Size(mm)
ECF-520	220-240V/50~60Hz	1.08	520*520*500
ECF-520S		1.03	520*520*415
ECF-520C		1.08	520*750*910
ECF-720		1.08	720*720*500
ECF-720C		1.08	960*720*895

MODEL ECF-520



ECF-520S



ECF-720



ECF-720C



Easy to use and simple to operate



Can keep warm and show the food best looking




Rotate to heat the corn evenly to increase the blasting rate

MODEL PC-803



High-efficiency motor, stable speed, high working efficiency

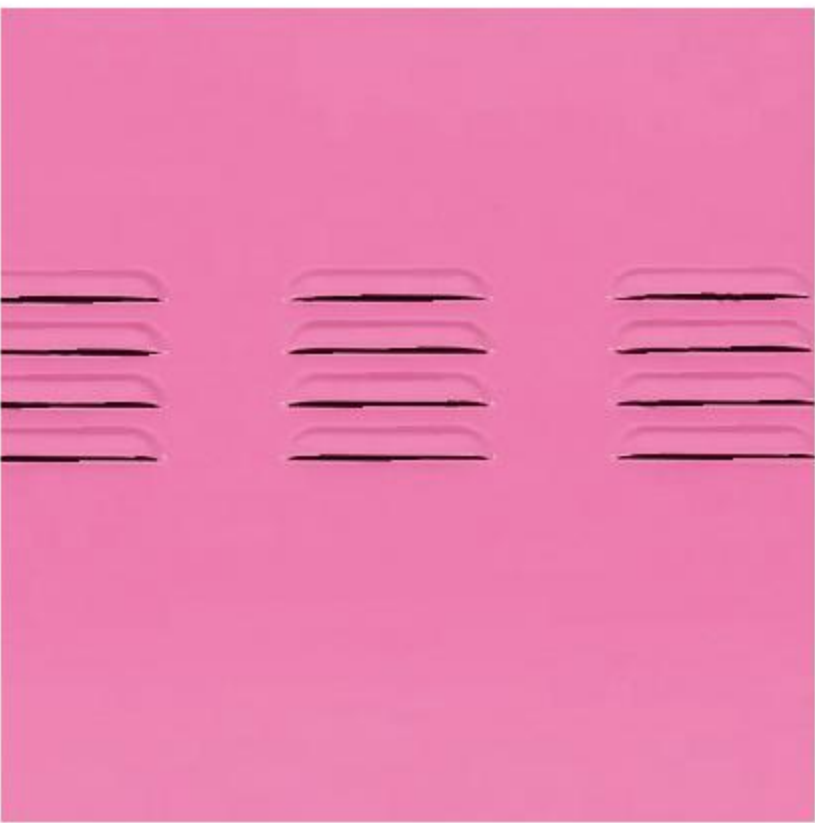

Can dissipate excess heat



Use simple and convenient switches, control whatever you want

MODEL ECF-520C



Electric Bain Marie

Electric Bain Marie

MODEL BMH-4

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.



Model	Voltage	Power(kW)	Size(mm)
BMH-1	220-240V/50~60Hz	0.15	235*210*320
BMH-2		0.3	235*415*320
BMH-3		0.45	235*620*320
BMH-4		0.6	420*415*320
BM-S2		1.2	577*340*240



BMH-1



BMH-2



BMH-3



5 levels adjustable temperature thermostat



Easy to clean the residual water



Waterproof heating, heat preservation faster and more uniform


MODEL BM-S2



MODEL BM-1/1



OPTION

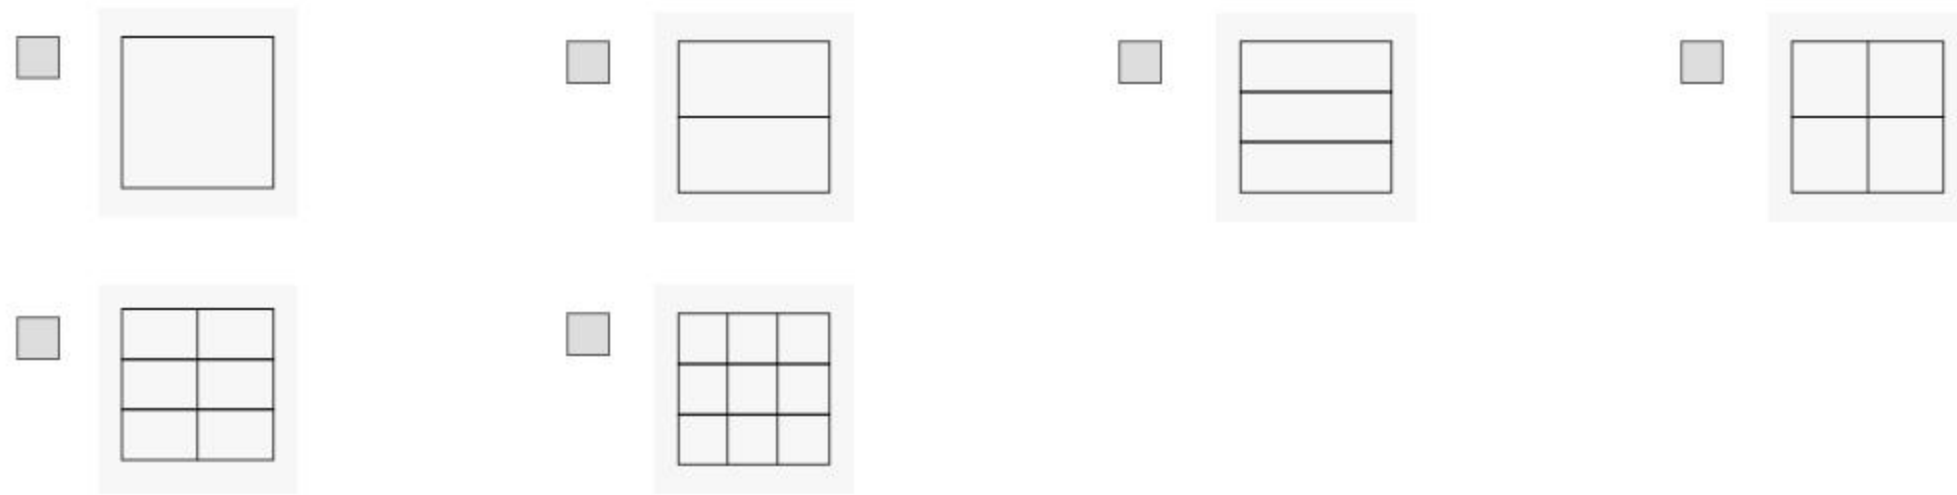

BM-1/6



BM-N



BM-W

Electric Bain Marie

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.




Model	Voltage	Power[kW]	Size[mm]
BM-1/1	220-240V/50~60Hz	1.2	577*340*240
BM-1/2			577*340*240
BM-1/3			577*340*240
BM-1/4			577*340*240
BM-1/6			577*340*240
BM-2T		1.5	355*565*240
BM-4T		1.5	685*565*240
BM-6T		1.8	1030*565*240
BM-8T		2	1375*565*240
BM-N		1.2	577*340*240
BM-W		1.2	577*340*240

Electric Bain Marie

- Cook and preserve the product at a food-safe temperature.
- Durable stainless steel food well.
- Reheat food and keep it fresh.
- GN Pan with different sizes.



OPTION

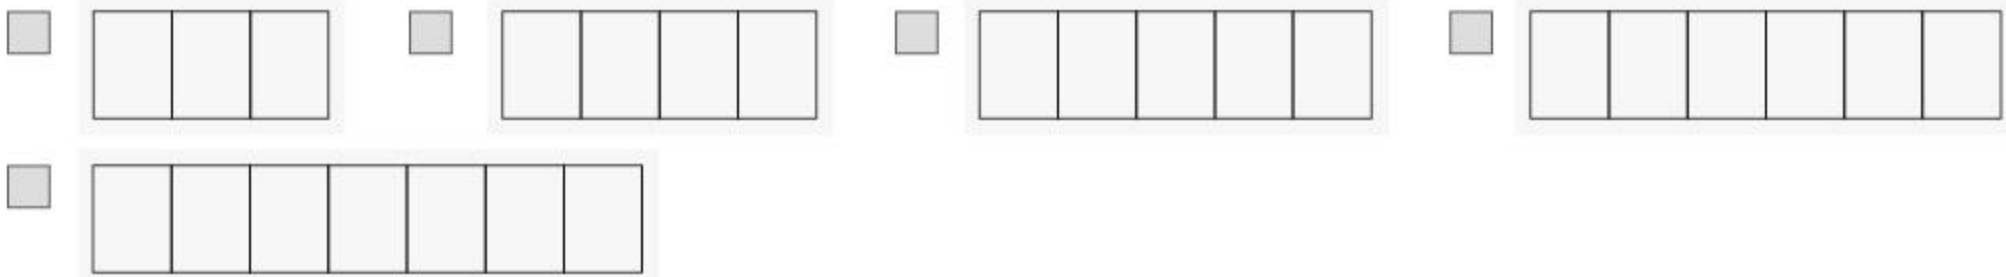

Model	Voltage	Power[kW]	Size[mm]
BM-3	220-240V/50~60Hz	1	910*350*320
BM-4		1.5	1175*350*320
BM-5			1440*350*320
BM-6		2	1175*350*320
BM-7			1440*350*320
BM-3D		1	950*365*330
BM-4D			1215*365*330
BM-5D		1.5	1485*365*330
BM-6D		1.8	1750*365*330

Model	Voltage	Power[kW]	Size[mm]	GN pans
BM-M20-4	220V/50Hz	1.3	1175*460*700	4X
BM-M20-5		1.8	1450*460*700	5X
BM-M20-6		1.8	1725*460*700	6X
BM-M21-3		1.3	1080*660*700	3X
BM-M21-4		1.8	1415*660*700	4X
BM-M21-5		1.8	1750*660*700	5X
BM-M21-6		1.8	2085*660*700	6X

MODEL BM-5



MODEL BM-M20-4



MODEL BM-4T



MODEL BM-6T




Thermostat has stainless steel anti-collision protection



Quality switch can prolong the service life of the machine



Different size of GC Pan

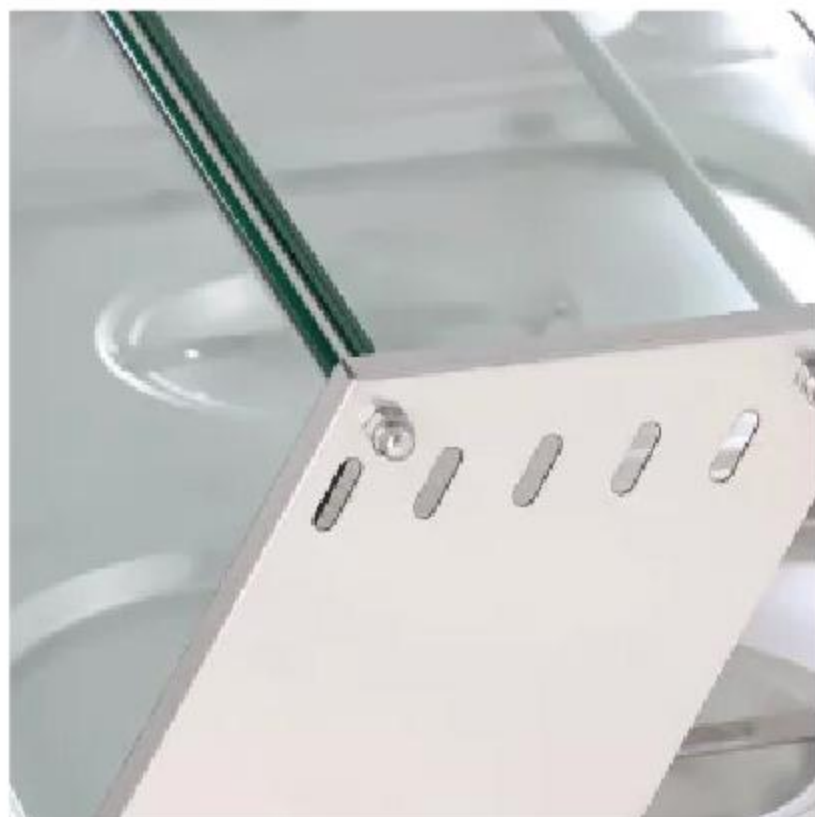

Class Cover Baffle Protect food safety and hygiene



Water Tap Easy to drain and clean



Digital temperature display Smart display temperature

MODEL BM-3D



Electric Bain Marie

- Glass shelf and cabinet
- Overall stainless steel structure
- Adjustable feet
- **GN pans: 1/1x150mm**

OPTION

- A

Cabinet
- C

Class Cover
- D
- E
- B

Without Cabinet

MODEL BM-M01-4

- A
- C
- D



MODEL BM-M05-4

- B



MODEL BM-M09-4

- B



N=BM-M01 / BM-M02 / BM-M03 / BM-M04

Model	Voltage	Power(kW)	Size(mm)	GN pans
N-3	220V/50Hz	2	1120*670*800+600	3X
N-4		2	1455*670*800+600	4X
N-5		2	1790*670*800+600	5X
N-6		3	2125*670*800+600	6X



MODEL BM-M02-4

- A
- C
- E



MODEL BM-M03-4

- A



MODEL BM-M04-4

- B



Electric Bain Marie

- **Cabinet and pipe shelf**
- Overall stainless steel structure
- Four casters 100mm dia. with 2 brakes
- With double side pipe shelf



Model	Voltage	Power(kW)	Size(mm)	GN pans
BM-M10	220V/50Hz	2	1450*1240*870	a1
BM-M11		2	1100*1240*815	a2
BM-M12		2	1780*1240*840	a3
BM-M13		3	2125*1240*815	a4

a1=2x(1/1x150mm) + 4x(1/2x150mm) a2=2x(1/1x150mm) + 2x(1/2x150mm)
a3=4x(1/1x150mm) + 2x(1/2x150mm) a4=4x(1/1x150mm) + 4x(1/2x150mm)

OPTION



BM-M11



BM-M12



BM-M13

Electric Bain Marie

- **Abinet and Lamps**
- Overall stainless steel structure
- Adjustable feet
- **GN pans: NX(1/1x150mm)**

MODEL BM-M07



MODEL BM-M08




Model	Voltage	Power(kW)	Size(mm)	GN pans
BM-M07	220V/50Hz	4	1500*1400*850+700	b1
BM-M08		3	1600*800*850+700	b2

b2=8x(1/1x150mm) b2=2x(1/1x150mm) + 4x(1/2x150mm)

Chocolate Melter

- Stainless steel 201 structure ensure longer life
- Stainless steel heating tube provide quick heat-up
- Digital display panel, more scientific and fashionable
- Can realize automatic constant temperature
- Thick high-quality chocolate pan, humanized design

OPTION

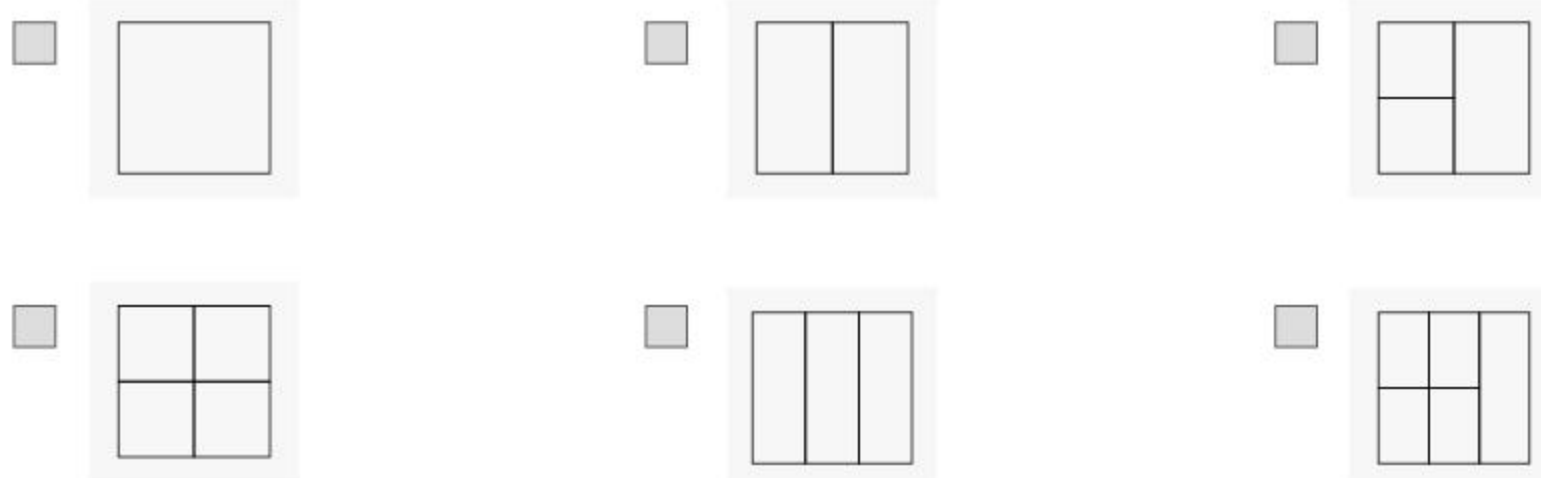

Model	Voltage	Power(kW)	Capacity	Size(mm)
CMM-4L	220-240V/ 50-60Hz	0.8	14-20 knives	355*203*292
CMM-17L2			1.7L*2=3.4L	
CMM-8LM	220-240V/ 50-60Hz	1	8L	385*353*292
CMM-4L2M			4L*2=8L	
CMM-74L			4L*1+1.7L*2=7.4L	
CMM-17L4M			1.7L*4=6.8L	
CMM-8LD	220-240V/ 50-60Hz	1	8L	385*353*292
CMM-17L4D			1.7L*4=6.8L	385*353*292
CMM-4L3D			4L*3=12L	565*353*292
CMM-16LD			6L*1+2.5L*4=16L	565*353*292

MODEL CMM-17L4M



MODEL CMM-8LD




MODEL CMM-17L2



Chocolate Melter

- Stainless steel 201 structure ensure longer life
- Stainless steel heating tube provide quick heat-up
- Digital display panel, more scientific and fashionable
- Can realize automatic constant temperature
- Thick high-quality chocolate pan, humanized design

OPTION

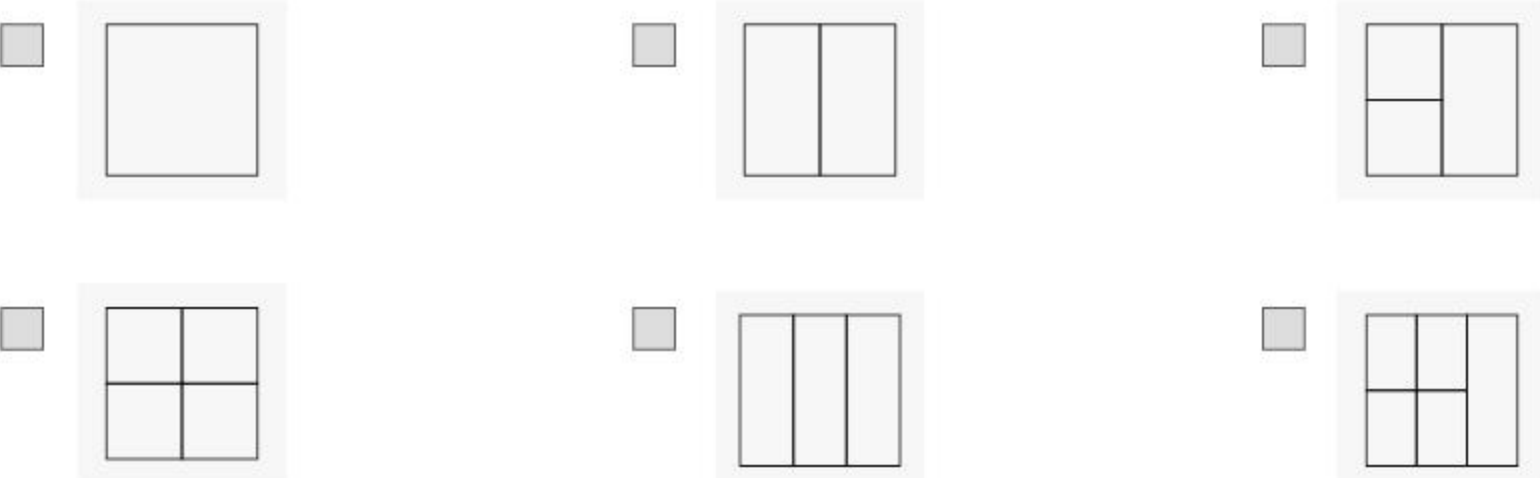

Model	Voltage	Power(kW)	Capacity	Size(mm)
CMM-1QH	220-240V/ 50-60Hz	0.5	12KG	465*355*260
CMM-2QH			6KG*2=12 KG	465*355*260
CMM-4QH			3KG*4	465*355*260
CMM-1QD	220-240V/ 50-60Hz	1	8KG	485*360*180
CMM-2QD			12KG	665*360*180
CMM-4QD				
CMM-3QD				
CMM-5QD				
CMM-6QD				
CMM-01	220-240V/ 50-60Hz	0.04	1KG	230*170*110
CMM-02		0.04+0.04	1KG+1KG	350*230*110

MODEL CMM-8LM



MODEL CMM-2QD



MODEL CMM-02



MODEL CMM-4L



MODEL CMM-01



Sauce Cheese Warmer

MODEL CW-4.4A

- **Body material SS430**,bowl material SS304 structure ensure longer life
- **U-shaped heating tube** provide more quick and evenly heat-up
- Work as an ideal dispenser for **Caramel, Chili , Sauce, Gravy and warming cheese etc**
- Cook and preserve the sauce at a regular temperature



Model	Voltage	Power(kW)	Size(mm)
CW-4.4B	220-240V/50~60Hz	0.5	206*394*382
CW-4.4A		0.5	230*420*388
CW-Q1		0.3	180*240*365
CW-Q2		0.3	350*240*365
CW-Q3		0.3	350*230*380



Sauce Cheese Warmer

MODEL SW-1

- **Stainless Steel heating tube** provide more quick heat-up
- Antirust **stainless steel 201** structure ensure longer life
- **Non-skid rubber feet** prevent slipping
- Small appearance, high-end, practical
- When the body is heated, the bottom of the machine is not hot.



Model	Voltage	Power(kW)	Size(mm)
SW-1S	220-240V/50~60Hz	0.16	140*195*230
SW-2S		0.32	285*195*230
SW-3S		0.48	430*195*230
SW-4S		0.64	576*195*230



6 levels heating power adjustable:35 C/51 C/63 C/74 C/85 C/99 C

Simple operation, better control of the number of copies

Eensures that the sauce is hot from start to finish

MODEL CW-4.4B




Stainless Steel Condiment Dispenser

MODEL MCD80211

- Antirust **stainless steel 201** structure ensure longer life
- **Non-skid rubber feet** prevent slipping
- **Fixed pump head** can effectively prevent leakage
- **Large capacity**, enough seasoning can be put in at one time
- Can be used in sauces such as soy sauce, vinegar, tomato sauce, chocolate sauce, salad dressing, etc.

Model	Capacity(L)	Size(mm)
MCD80211	3	184*186*255
MCD80212	3x2	364*186*255
MCD80213	3x3	544*186*255

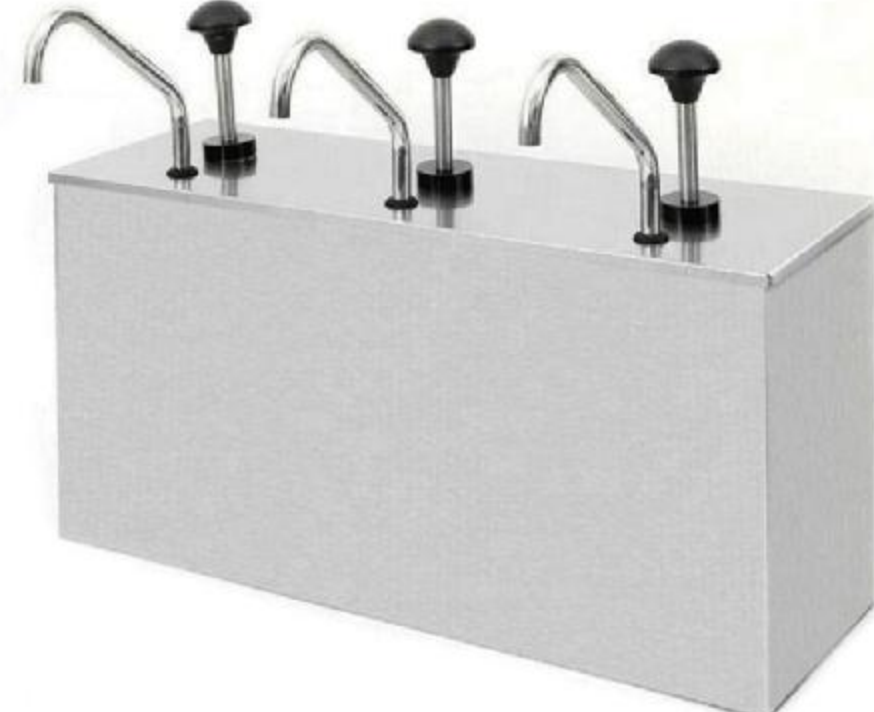

Electric Soup Kettles

- **Stainless Steel heating tube** provide more quick heat-up
- **Convenient lifting ring** design smooth edges without cutting hands, safer lifting
- **Large capacity of 10 liters**, durable, attractive and easy to clean
- **Red light** indicates heating
- **Non-skid rubber feet** prevent slipping

MODEL SK-13



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
SK-10	220-240V/50~60Hz	0.4	10	340*340*370
SK-10S				
SK-10S		0.6	13	340*340*370

MODEL SK-10



Easily adjust the temperature
35-80 C



Hanging upside down on the
side saves time and space



Convenient and fast
Not afraid of falling onto the
pot

MODEL SK-10S



MODEL CW-6



French Fry Warmer Station

- U-shaped heating tube provide more quick and evenly heat-up
- Antirust stainless steel 201 structure ensure longer life
- Automatic constant temperature accurate temperature 40-70°C,keep food warm and no water loss
- Non-skid rubber feet prevent slipping



Model	Voltage	Power(kW)	Size(mm)
CW-1/1	220-240V/50~60Hz	0.6	340*570*437
CW-560		0.8	560*600*650
CW-6		1.1	600*700*1650
801	/	/	520*375*140
802		/	520*490*140

MODEL 801 French Fries Slot



MODEL CW-560



MODEL CW-1/1



Food Heat Lamp

- High-quality electroplating lampshade, sturdy and durable, high temperature resistance, no deformation
- Long-lasting heat preservation, lock in the original flavor
- Stainless steel U-shaped chassis, not easy to rust, hygienic and healthy
- Can enhance the food display effect, and at the same time play a role of sterilization



Model	Voltage	Power(kW)	Size(mm)
CW-250	220-240V/50~60Hz	0.25	490*370*280
CW-500		0.5	495*360*600
CW-750		0.75	740*335*790

MARCHEF warmer heating lamps have a simple design and a sturdy structure, which can provide you with a reliable way to keep fried foods hot without drying them out. This kind of heating lamp comes with a "C-shaped base" that can accommodate a full-size food pan, and the height is adjustable, so you can find the ideal temperature for each type of food.



Independent switch, safer to use



waterproof, explosion-proof, safer and more environmentally friendly



It can dissipate the light bulb and prolong its service life

MODEL CW-500



MODEL CW-750



Model	Voltage	Power(kW)	Size(mm)
FDW-1P	220-240V/50~60Hz	0.6	350*350*520
FDW-1PD		1.2	670*360*520
FDW-2P		0.8	660*460*600
FDW-3P		1	950*460*600
FDW-4P		1.6	1240*460*600
FDW-2PS		0.8	660*460*600
FDW-3PS		1	950*460*600
FDW-4PS		1.6	1240*460*600



FDW-3PS

Food Warmer



- Stainless Steel heating tube provide more quick heat-up
- Antirust SS201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Use highly transparent toughened glass, high temperature resistance, high impact resistance.
- Separate from temperature, easy to control independent light switch.
- Interior lighting show the best state of food.



FDW-2P



Easily adjust the temperature 30-85 C



Orange light indicates heating



Waterproof heating, heat preservation faster and more uniform



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low

MODEL FDW-1P



MODEL FDW-1PD



Model	Voltage	Power(kW)	Size(mm)
FDW-701	220-240V/50~60Hz	1	380*450*590
FDW-702		1.5	660*450*590
FDW-703		1.8	890*450*590
FDW-704		2	1200*450*590
FDW-604		0.8	380*490*645
FDW-601		1.2	660*490*645
FDW-602		1.5	900*490*645
FDW-603		2	1200*490*645

MODEL FDW-604



Food Warmer



- Stainless Steel heating tube provide more quick heat-up
- Antirust SS201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Use highly transparent toughened glass, high temperature resistance, high impact resistance.
- Separate from temperature, easy to control independent light switch.
- Interior lighting show the best state of food.

MODEL FDW-602



Cup/Plate Warmer



MODEL MCW-1

- All Stainless Steel Body; Convection Heating Mode
- Even Temperature Control; New design of handle of trolley,feel more comfortable.
- More safe with water-proof switch.
- The body is made of stainless steel,good quality.

Model	Voltage	Power(kW)	Size(mm)
MCW-1	220-240V/50~60Hz	0.14	360*250*550
MCW-2		0.14	360*320*550
PW-60		0.6	390*560*770
PW-120		1	600*560*770
PW-101		0.4	450*485*930
PW-102		0.8	450*910*930
FW-11S		2.62	790*975*1795
FW-22S		5.24	1540*975*1795



PW-102



FW-11S



FW-22S



Easily adjust the temperature 0-85°C



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low.



Slide the rail door left and right for easy food placement

MODEL FDW-704



Thermostat, Thermostatically controlled, Maximum temperature 80°C



Adjustable drawer board offer versatility. Heating plate, Distributed heating range, even heating



The wheels can be fixed to prevent forward and backward movement

MODEL PW-60



Knife Steriliser

- Stainless steel UV lamp sterilization knife box has good heat insulation effect and excellent energy saving performance
- Using mirror polishing technology, bright can illuminate people, green and environmental protection
- Wall-hung hole design, you can choose wall-mounted installation or table placement
- UV lamp with metal mesh protection




Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
MKS-14	220-240V/50~60Hz	0.015	14-20 knives	510*160*600



Set a time 0-120mins for reminder, Meet a variety of disinfection needs.



The edges and corners are round and do not hurt your hands.

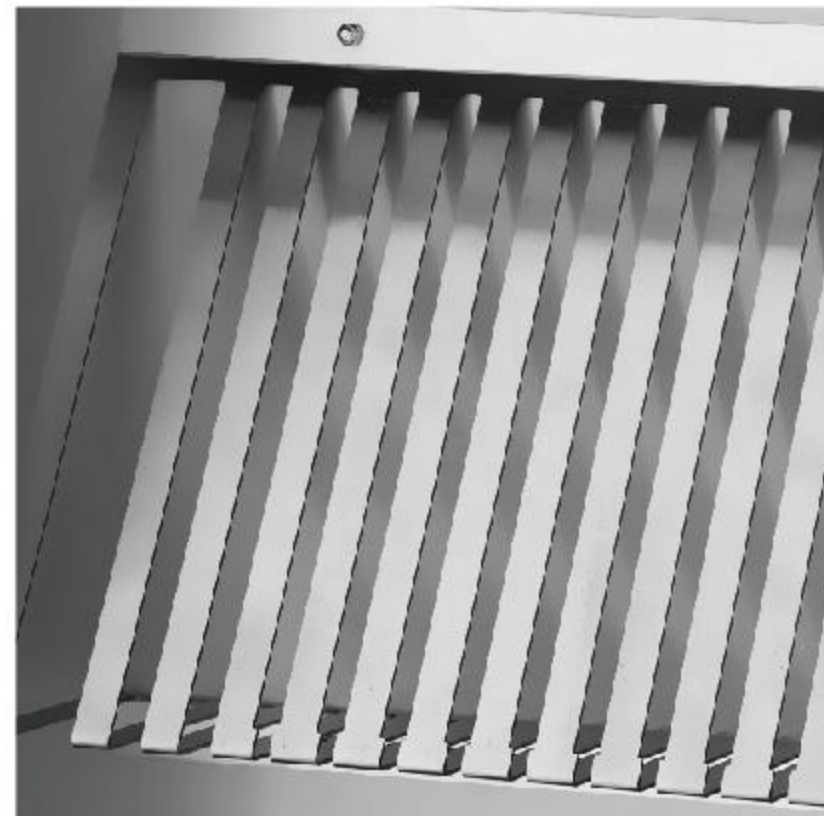

Strong suction makes the product firmer in the working process




Thick stainless steel, compressive and not deformed

MODEL MKS-14



Pasta Cooker

- Antirust stainless steel 201 structure ensure longer life
- Stainless Steel heating tube provide more quick heat-up
- Cabinet is insulated to prevent heat dissipation
- Smoke exhaust pipe is located on the top of the machine. When opened, steam and smoke can escape
- laminated shelf size 395*320mm
- Distance between each shelves:11cm

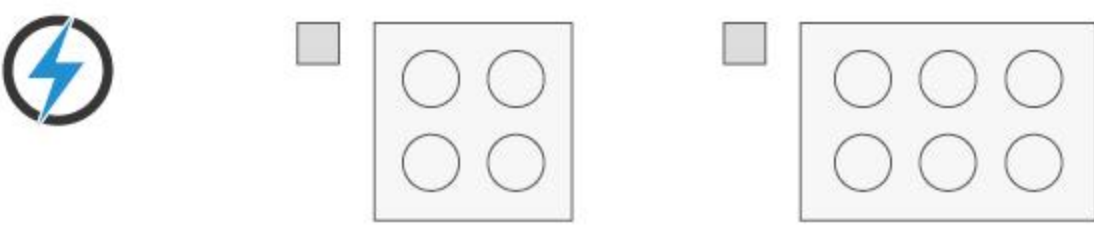

Model	Voltage	Power(kW)	No. of Baskets	Size(mm)
EPC-4T	220-240V/50~60Hz	2x2	4	430*580*410
EPC-6T		2x2x2	6	600*580*410
Model	Pressure	Used Gas	No. of Baskets	Size(mm)
GPC-4T	2800/2000Pa	LPG/Natural Gas	4	430*580*410
GPC-6T			6	600*580*410



EPC-4L-2



EPC-6T




EPC-16L

Model	Voltage	Power(kW)	No. of Baskets	Size(mm)
EPC-16L	220-240V/50~60Hz	2.8+2.8	8	500*485*405
EPC-8L		2.8	4	266*470*364
EPC-4L		2	2	175*400*305
EPC-4L-2		2x2	4	350*400*305
EPC-4	220-240V/50~60Hz	1.5x1.5	4	450*480*285
EPC-6		2x2x2	6	690*480*285



Water Tap Easy to drain and clean

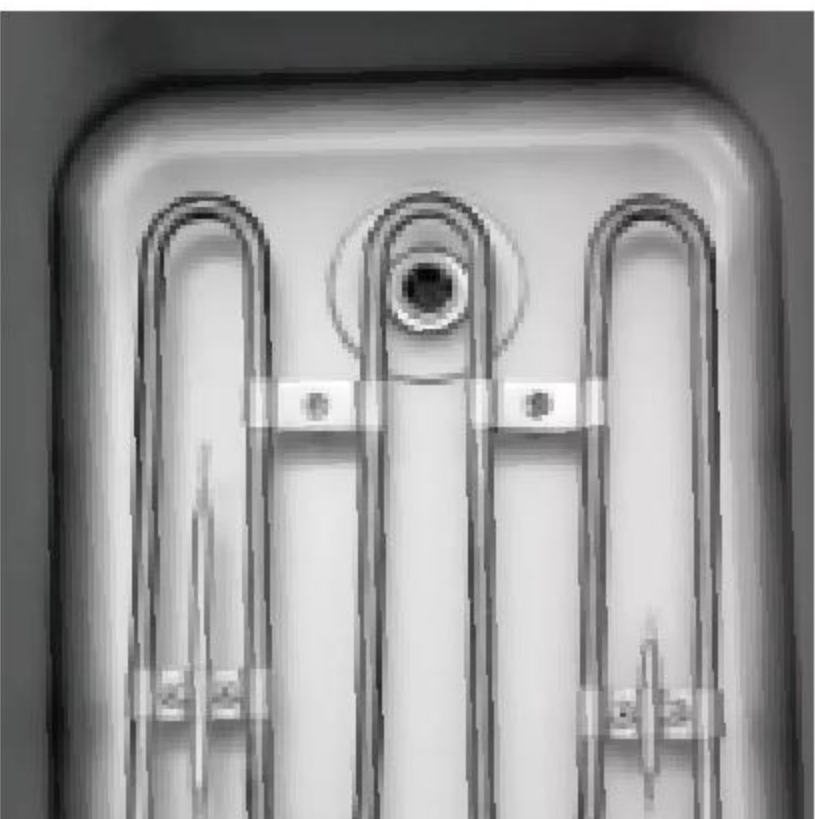

Digital temperature display
Smart display temperature

MODEL EPC-4T



MODEL EPC-8L



Water Boiler

- Multi-stage temperature control, free adjustment of water temperature
- Rapid boiling, heating in the whole chassis, meeting commercial needs
- Overheating protection, automatically power off if the temperature is too high
- Long-term heat preservation can save energy and electricity
- Large capacity for drinking water for many people



Insulation and anti-scald, safe to use, not easy to burn



Exhaust decompression to ensure the safety of boiling water



Stainless steel inner tank, full chassis heating method

MODEL WB-10S



MODEL WB-15LD



Model	Voltage	Power[W]	Max/Full Capacity[L]	Size[mm]
WB-6LD	220-240V/ 50~60Hz	1500	6/7	230*230*420
WB-7LD		1500	7/8	230*230*440
WB-8LD		1500	8/9	230*230*472
WB-10LD		1500	9/10	230*230*510
WB-15LD		2500	14/14.5	290*290*485
WB-18LD		2500	16/18	290*290*515
WB-22LD		2500	20/22	290*290*580
WB-25LD		2500	23/25	290*290*643
WB-8S		2500	8	190*240*520
WB-10S		2500	10	190*240*650

MODEL WB-8S



Coffee Maker

- Multi-stage temperature control, free adjustment of water temperature
- Rapid boiling, heating in the whole chassis, meeting commercial needs
- Overheating protection, automatically power off if the temperature is too high
- Long-term heat preservation can save energy and electricity
- Large capacity for drinking for many people



Model	Voltage	Power[W]	Rate/Full Cap	Size[mm]
CB-8LS	220-240V/ 50~60Hz	950	5.6L/8.9L	Dia.220xH:412
CB-9LS		950	6.3L/9.7L	Dia.220xH:452
CB-10LS		950	7.6L/10.9L	Dia.220xH:498
CB-11LS		950	8.5L/11.8L	Dia.220xH:500
CB-18LS		1500	12.7L/18.4L	Dia.290xH:452
CB-21LS		1500	14.7L/21L	Dia.290xH:498
CB-25LS		1500	19.3L/25.1L	Dia.290xH:558
CB-8LD	220-240V/ 50~60Hz	950	5.1L/8.3L	Dia.290xH:420
CB-9LD		950	5.7L/8.8L	Dia.290xH:437
CB-10LD		950	6.9L/10L	Dia.290xH:472
CB-11LD		950	7.8L/10.9L	Dia.290xH:504
CB-12LD		1500	11.3L/12.9L	Dia.290xH:485
CB-19LD		1500	13.8L/19.6L	Dia.290xH:517
CB-23LD		1500	18.2L/23.7L	Dia.290xH:581
C-CB-02C1	230V	2020	1.8L	205×405×455
C-CB-02C2		1900	2L	205×405×527.2
C-CB-02C3		1900	2.2L	405×205×605
CFM-2086		2020	1.8L	205×405×455
CFM-0001		1900	2.2L	405×205×605

MODEL C-CB-02C1



MODEL CB-7LD



MODEL CFM-2086



MODEL C-CB-02C2



MODEL CFM-0001



Coffee Grinder

- Low noise motor design, high efficiency, fast and quiet grinding
- Grinding gear discs, high productivity, fast grinding
- Simple grinding operation, easy cleaning and maintenance
- The body is made of aluminum, not easy to damage



Model	Voltage	Power(W)	Capacity	Size(mm)
MCG-600AB	220-240V/50~60Hz	350	7~12KG/H	360*250*580
MCG-600AC				360*250*580
MCG-600AD				300*210*560
MCG-650AB				330*240*640
MCG-700AB				300*210*560
MCG-700AC				220*240*580
MCG-700AD				220*275*580
MCG-800		180	3~6KG/H	230*145*450



MODEL MCG-600AC



Control the grinding thickness without weight



Adjustable powder thickness



High-quality stainless steel grinding disc, easy to clean



Can preserve the coffee's moisturizing aroma, professional ultra-fine grinding

MODEL MCG-650AB



MODEL MCG-600AD



MODEL MCG-700AD



MODEL MCG-800



MODEL MCG-700AC



Model	Voltage	Power(W)	Capacity	Size(mm)
MS-1	220-240V/50~60Hz	80	1	190*160*530
MS-2		80+80	1+1	230*230*530
MS-1A		300	1	170*170*530
MS-2B		150	1	180*160*550



MS-1A



MS-2B



MS-1



MS-1

MODEL MS-2



Smart induction design, install the cup, and start immediately. Automatically stop when the cup is removed.



360 ° stir evenly and double disc design make the mixing more quickly



Stainless steel material, environmentally friendly, healthy, easy to clean



Silicone cup holder, high strength

MODEL MS-2



Sous Vide

- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Stainless steel motor cover has high pressure resistance and damage resistance, protecting the motor from damage
- Thickened main body and base firmly support the entire machine




Model	Voltage	Power(kW)	Capacity	Size(mm)
SC-16L	230V/50Hz	0.5	16L	360*400*300
SC-22L		0.7	22L	620*360*300
SV-03A	220-240V/50~60Hz	1.5	/	140*110*332



Humanized simple operation, microcomputer display



Easy to clean, safe and healthy

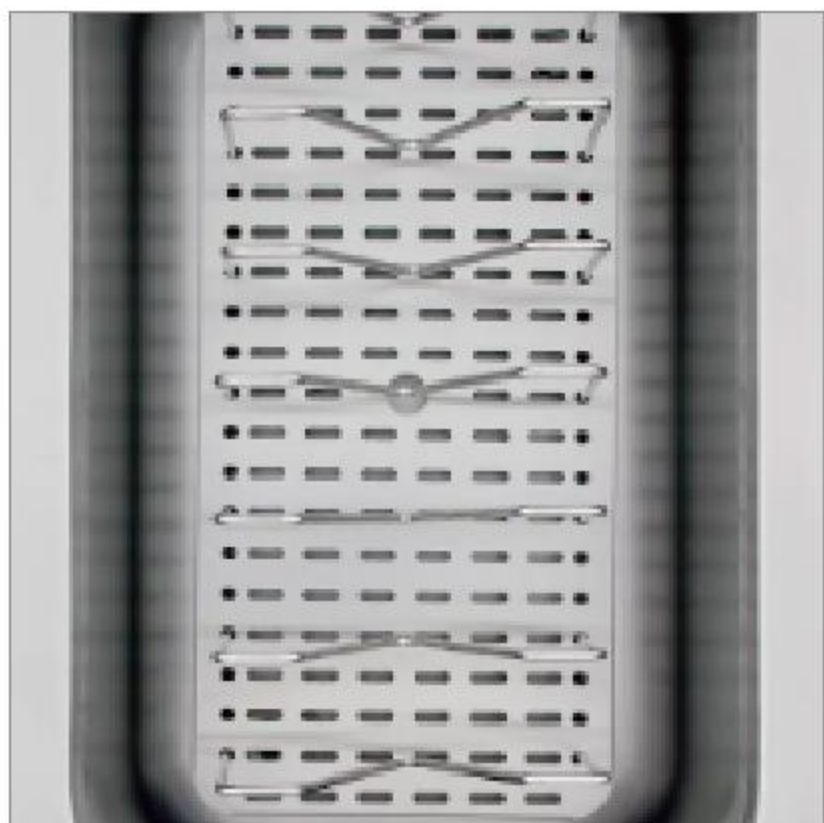

Waterproof heating, heat preservation faster and more uniform



Seamless mold cylinder

MODEL SV-03A



MODEL SC-22L




MODEL SC-16L



Gas Shawarma Grill

- **Stainless steel material** which is safe and rustproof; Easy to use and convenient
- **High-performance Motor** Brings Uniform Baking
- **Skewer** can rotate left and right
- **Plastic handle** to avoid scratches
- **Inbuilt drip tray** keeps machine clean and mess-free

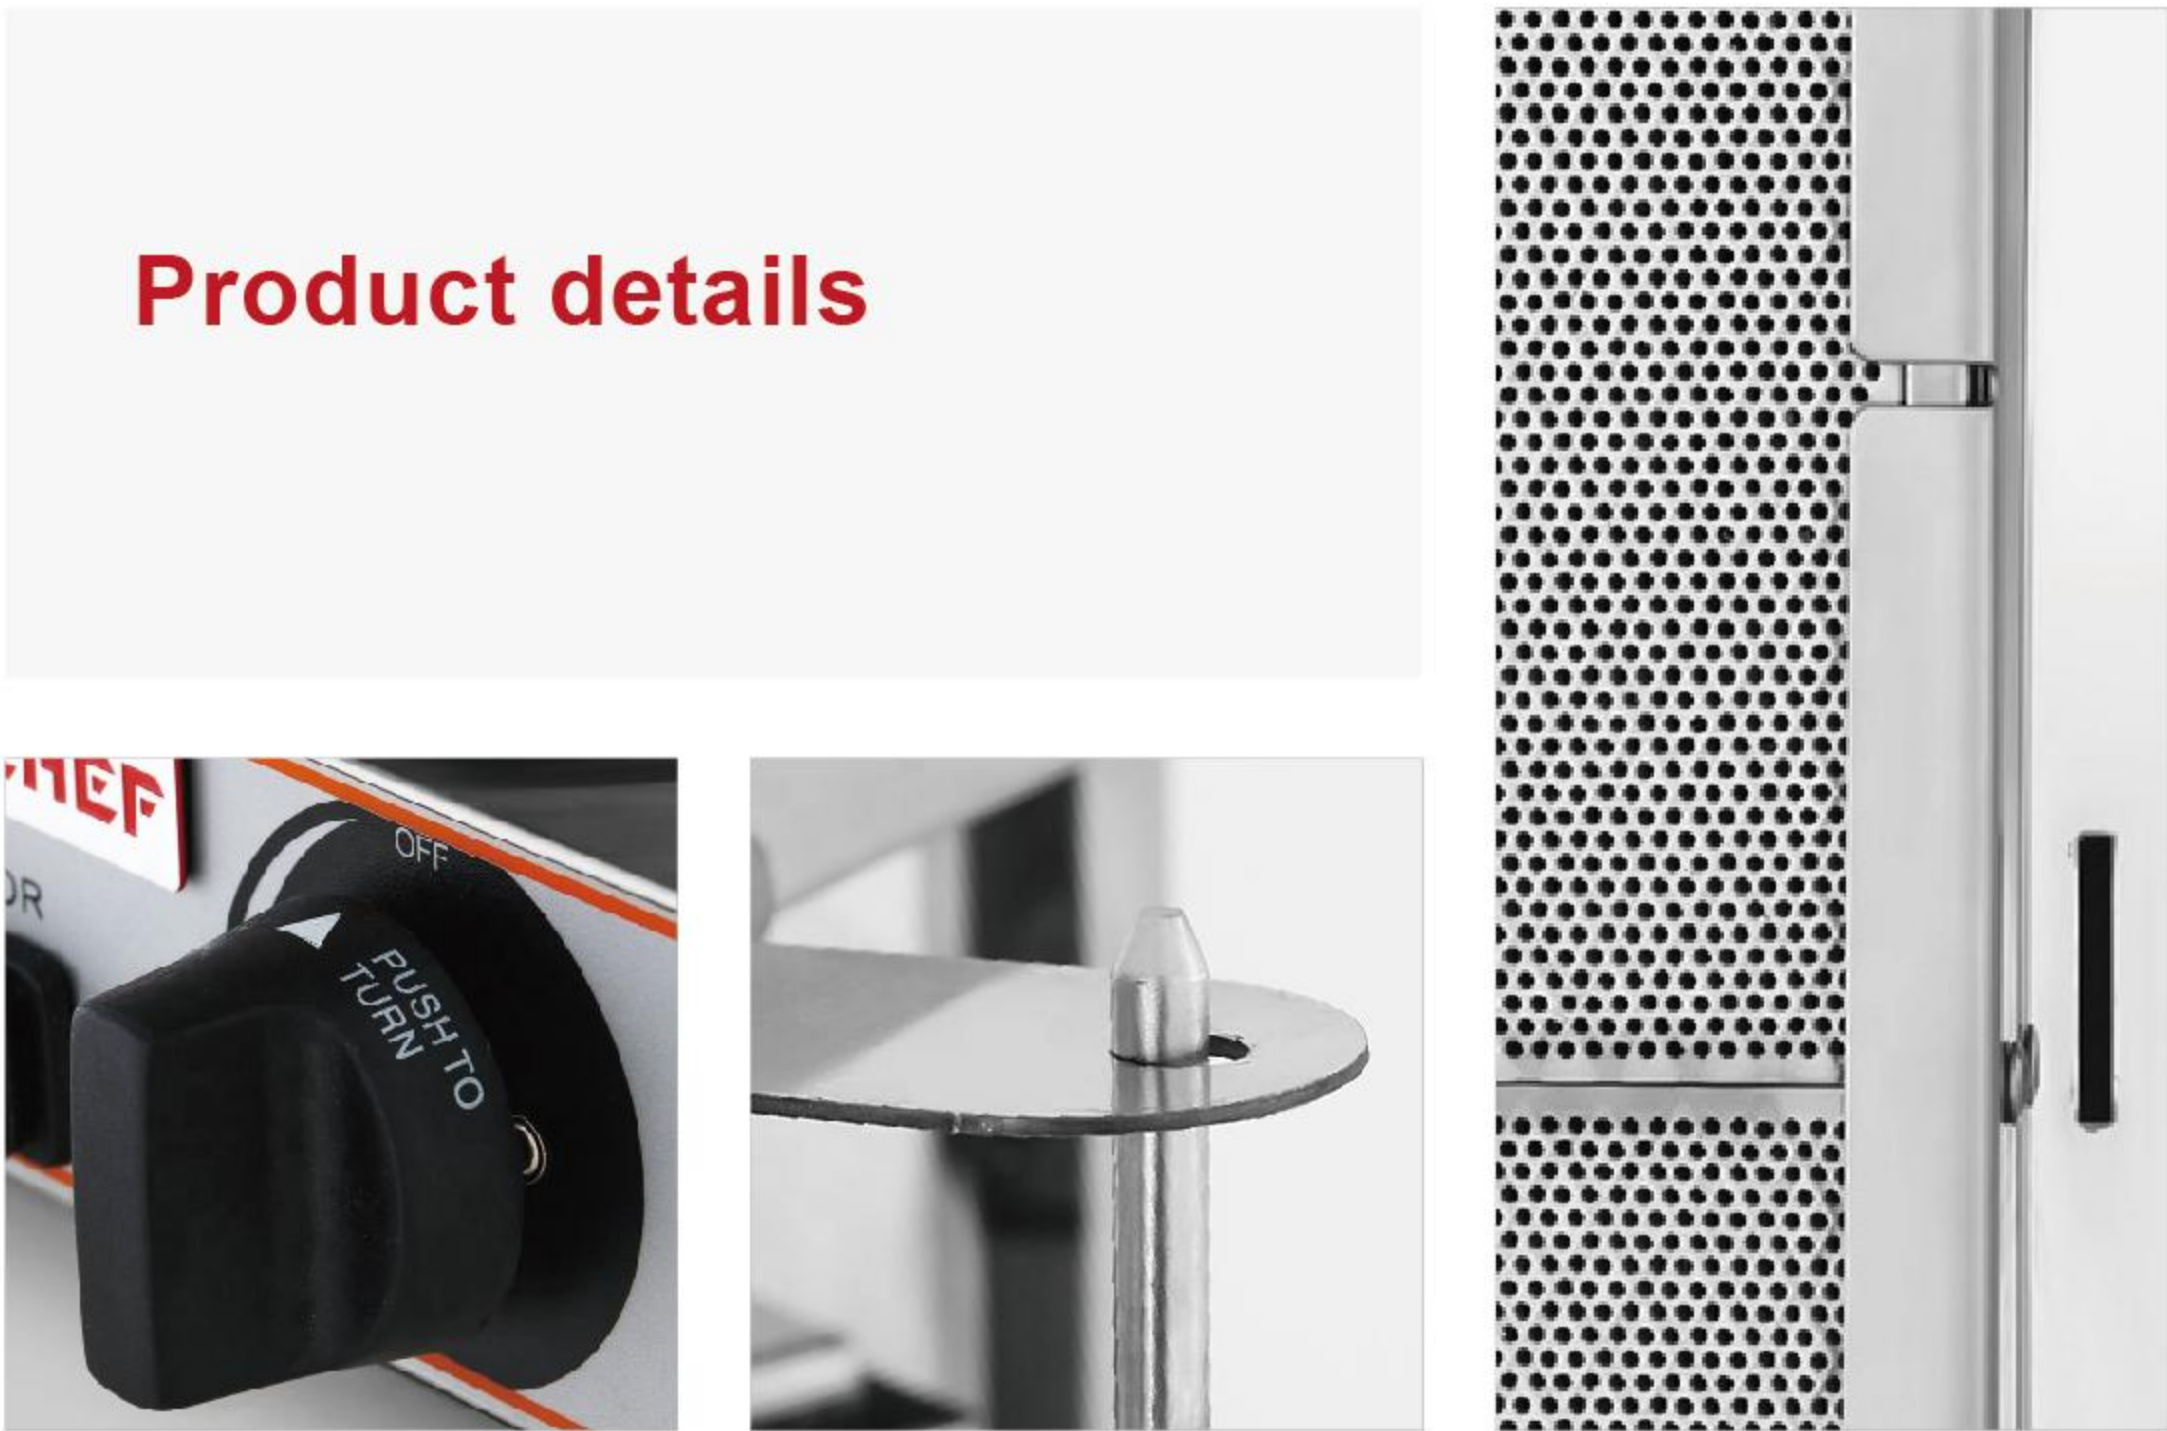

MODEL GS-2XL



MODEL GS-2L



MODEL GS-2S



Model	Pressure	Used Gas	Size(mm)
GS-2S	2800/2000Pa	LPG/ Natural Gas	295*300*490
GS-2M			540*650*950
GS-2L			540*650*1050
GS-2XL			540*650*1220
TGS-4			650*600*1770

MODEL GS-2M



Food Smoker

- Antirust stainless steel 201 structure ensure longer life
- Stainless Steel heating tube provide more quick heat-up
- Cabinet is insulated to prevent heat dissipation
- Smoke exhaust pipe is located on the top of the machine. When opened, steam and smoke can escape
- laminated shelf size 395*320mm
- Distance between each shelves:11cm



Model	Voltage	Power(W)	Size(mm)
YXL-70L	220-240V/50~60Hz	1022	L (490+100mm) *W410*H985
YXL-140L			L (490+100mm) *W440*H1300



Set a time 0-120mins for reminder



Easily adjust the temperature 30-135 C



Observe the temperature changes in the warmer at any time to prevent the temperature from overheating or too low



Easily deal with the large passenger flow, so that customers will not wait long

MODEL YXL-70L



MODEL YXL-140L



Electric Pizza Oven

- Stainless steel construction
- Temperature adjustable from 50-350 °C
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



Model	Voltage	Power(kW)	Size(mm)
EP-2PT	220~240V/50Hz	3	560*570*440
EP-2ST		3	560*570*440
EP-1ST		2	585*550*280
EP-1AT		2.5	496*490*350



Model	Voltage	Power(kW)	Size(mm)
KPZ-60M	220~240V/50Hz	3.6	635*640*411
KPZ-120M		4.7	838*740*411
EP4T	~3N-380V/220-240V	5	950*905*420
EP6T		6.81	950*1235*420
EP8T		9	950*905*740
EP12T		13.62	950*1235*740

MODEL EP4T



MODEL EP-1ST



MODEL EP-2PT



MODEL KPZ-60M



Electric Pizza Oven

- Stainless steel construction
- Temperature adjustable from 50-350 °C
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



MODEL EPO-X1



Model	Voltage	Power(kW)	Size(mm)
EPO-X1	220~240V/50Hz	6.5	1220*880*520

MODEL E01-1



Model	Voltage	Power(kW)	Size(mm)
E01-1	220-380V/50Hz	4.2	870*600*345

MODEL EPO-X2



Model	Voltage	Power(kW)	Size(mm)
EPO-X2	220~240V/50Hz	8.8	940*660*820

MODEL EPO-X4



Model	Voltage	Power(kW)	Size(mm)
EPO-X4	380V/50Hz	13	1220*880*905

Convection Oven

- Stainless steel construction
- Temperature adjustable from 50-350 ℃
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



Model	Voltage	Power(kW)	Size(mm)
CK05A	220~240V/50Hz	3	670*565*550
CK02A		3	670*565*550
CK06-60		3.5	636*640*614
CK06-90		4	840*745*644
CK06-120		6	840*785*744
CKF-60		4.7	636*645*571
CK10C		6	755*640*920

MODEL CK06-60



MODEL CK10C



MODEL CK05A



MODEL CKF-60



Convection Oven

- U-shaped heating tube provide more quick heat-up
- Antirust stainless steel 201 structure ensure longer life
- Non-skid rubber feet prevent slipping
- Built-in high temperature resistant lighting, the food status is clearly visible, and it is convenient to check the food status.
- 360° heat dissipation to ensure collective heat dissipation and lengthen service life of the machine
- Double-layer tempered glass is crystal clear and translucent, high-strength insulation and improves thermal efficiency.
- Water inlet design is an auxiliary device with spray function, which helps food fermentation

MODEL EC01-1



MODEL EC04-35



Model	Voltage	Power(kW)	Size(mm)
EC01-1	220~240V/50Hz	4.5	670*650*470
EC0-4F		2.67	595*600*580
EC0-8F		6.4	835*796*572
EC04-35		2	490*490*440
EC04-60		3	570*585*500
EC04-120		4	840*725*585

MODEL ECO-4F



MODEL EC04-120



Convection Oven

- Stainless steel construction
- Temperature adjustable from 50-350℃
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



Model	Voltage	Power(kW)	Size(mm)
EC01-E	220~240V/50Hz	6	880*800*600
EC03D		2.5	670*650*395



Model	Voltage	Power(kW)	Size(mm)
EC01C	220~240V/50Hz	4.5	670*650*470



Model	Voltage	Power(kW)	Size(mm)
EC01F	220~240V/50Hz	4.5	590*650*560



MODEL EC01-E



MODEL EC03D



MODEL EC01C



MODEL EC01F



Convection Oven

- **Stainless steel material** which is safe and rustproof; Easy to use and convenient
- **High-performance Motor** Brings Uniform Baking
- **Skewer** can rotate left and right
- **Plastic handle** to avoid scratches
- **Inbuilt drip tray** keeps machine clean and mess-free



Model	Voltage	Power(kW)	Size(mm)
CK03D	220~240V/50Hz	2.5	670*650*395
CK02C		4.5	675*640*500
CK02E		6	920*815*600



Electric Convection Oven

Model	Voltage	Power(kW)	Size(mm)
CO-5D	380V/50Hz	7.5	905*1280*955
CO-5DH			905*1280*955



Gas Convection oven

Model	Voltage	Power(kW)	Size(mm)
CO-5QH	220V/50Hz	0.55	905*1450*955
CO-5Q			905*1450*955



MODEL CK03D



MODEL CK02C



MODEL CO-5D



MODEL CO-5DH



Convection Oven

- **Stainless steel material** which is safe and rustproof; Easy to use and convenient
- **High-performance Motor** Brings Uniform Baking
- **Skewer** can rotate left and right
- **Plastic handle** to avoid scratches
- **Inbuilt drip tray** keeps machine clean and mess-free



Model	Voltage	Power(kW)	Size(mm)
CO-5DJ	380V/50Hz	7.5	905*1280*1570
CO-5DHJ			905*1280*1570



CO-5DJ



CO-5DHJ



CO-8D



CO-8DH

Electric Convection Oven



Model	Voltage	Power(kW)	Size(mm)
CO-8D	380V/50Hz	15	905*1280*1280
CO-10D			905*1280*1520
CO-8DH	380V/50Hz	7.5	905*1280*1280
CO-10DH			905*1280*1520

Gas Convection Oven

Model	Voltage	Power(kW)	Size(mm)
CO-8Q	220V/50Hz	1.1	905*1450*1280
CO-10Q			905*1450*1520
CO-8QH			905*1450*1280
CO-10QH			905*1450*1520

Convection Oven


- Precision temperature control, adjustment range 66℃-260℃
- Antirust stainless steel 201 structure ensure longer life
- 60 minutes timer reminder function
- Fully enamel inner chamber is easy to clean
- Two-speed motor speed 950-1437 rpm
- Professional ignition control module with hot surface ignition is safe and reliable
- Reversible control panel, easy and reliable maintenance
- Single layer use, or double layer stacking to make better use of space and increase productivity



MODEL	MF-COE
-------	--------



MODEL	MF-COE-2
-------	----------

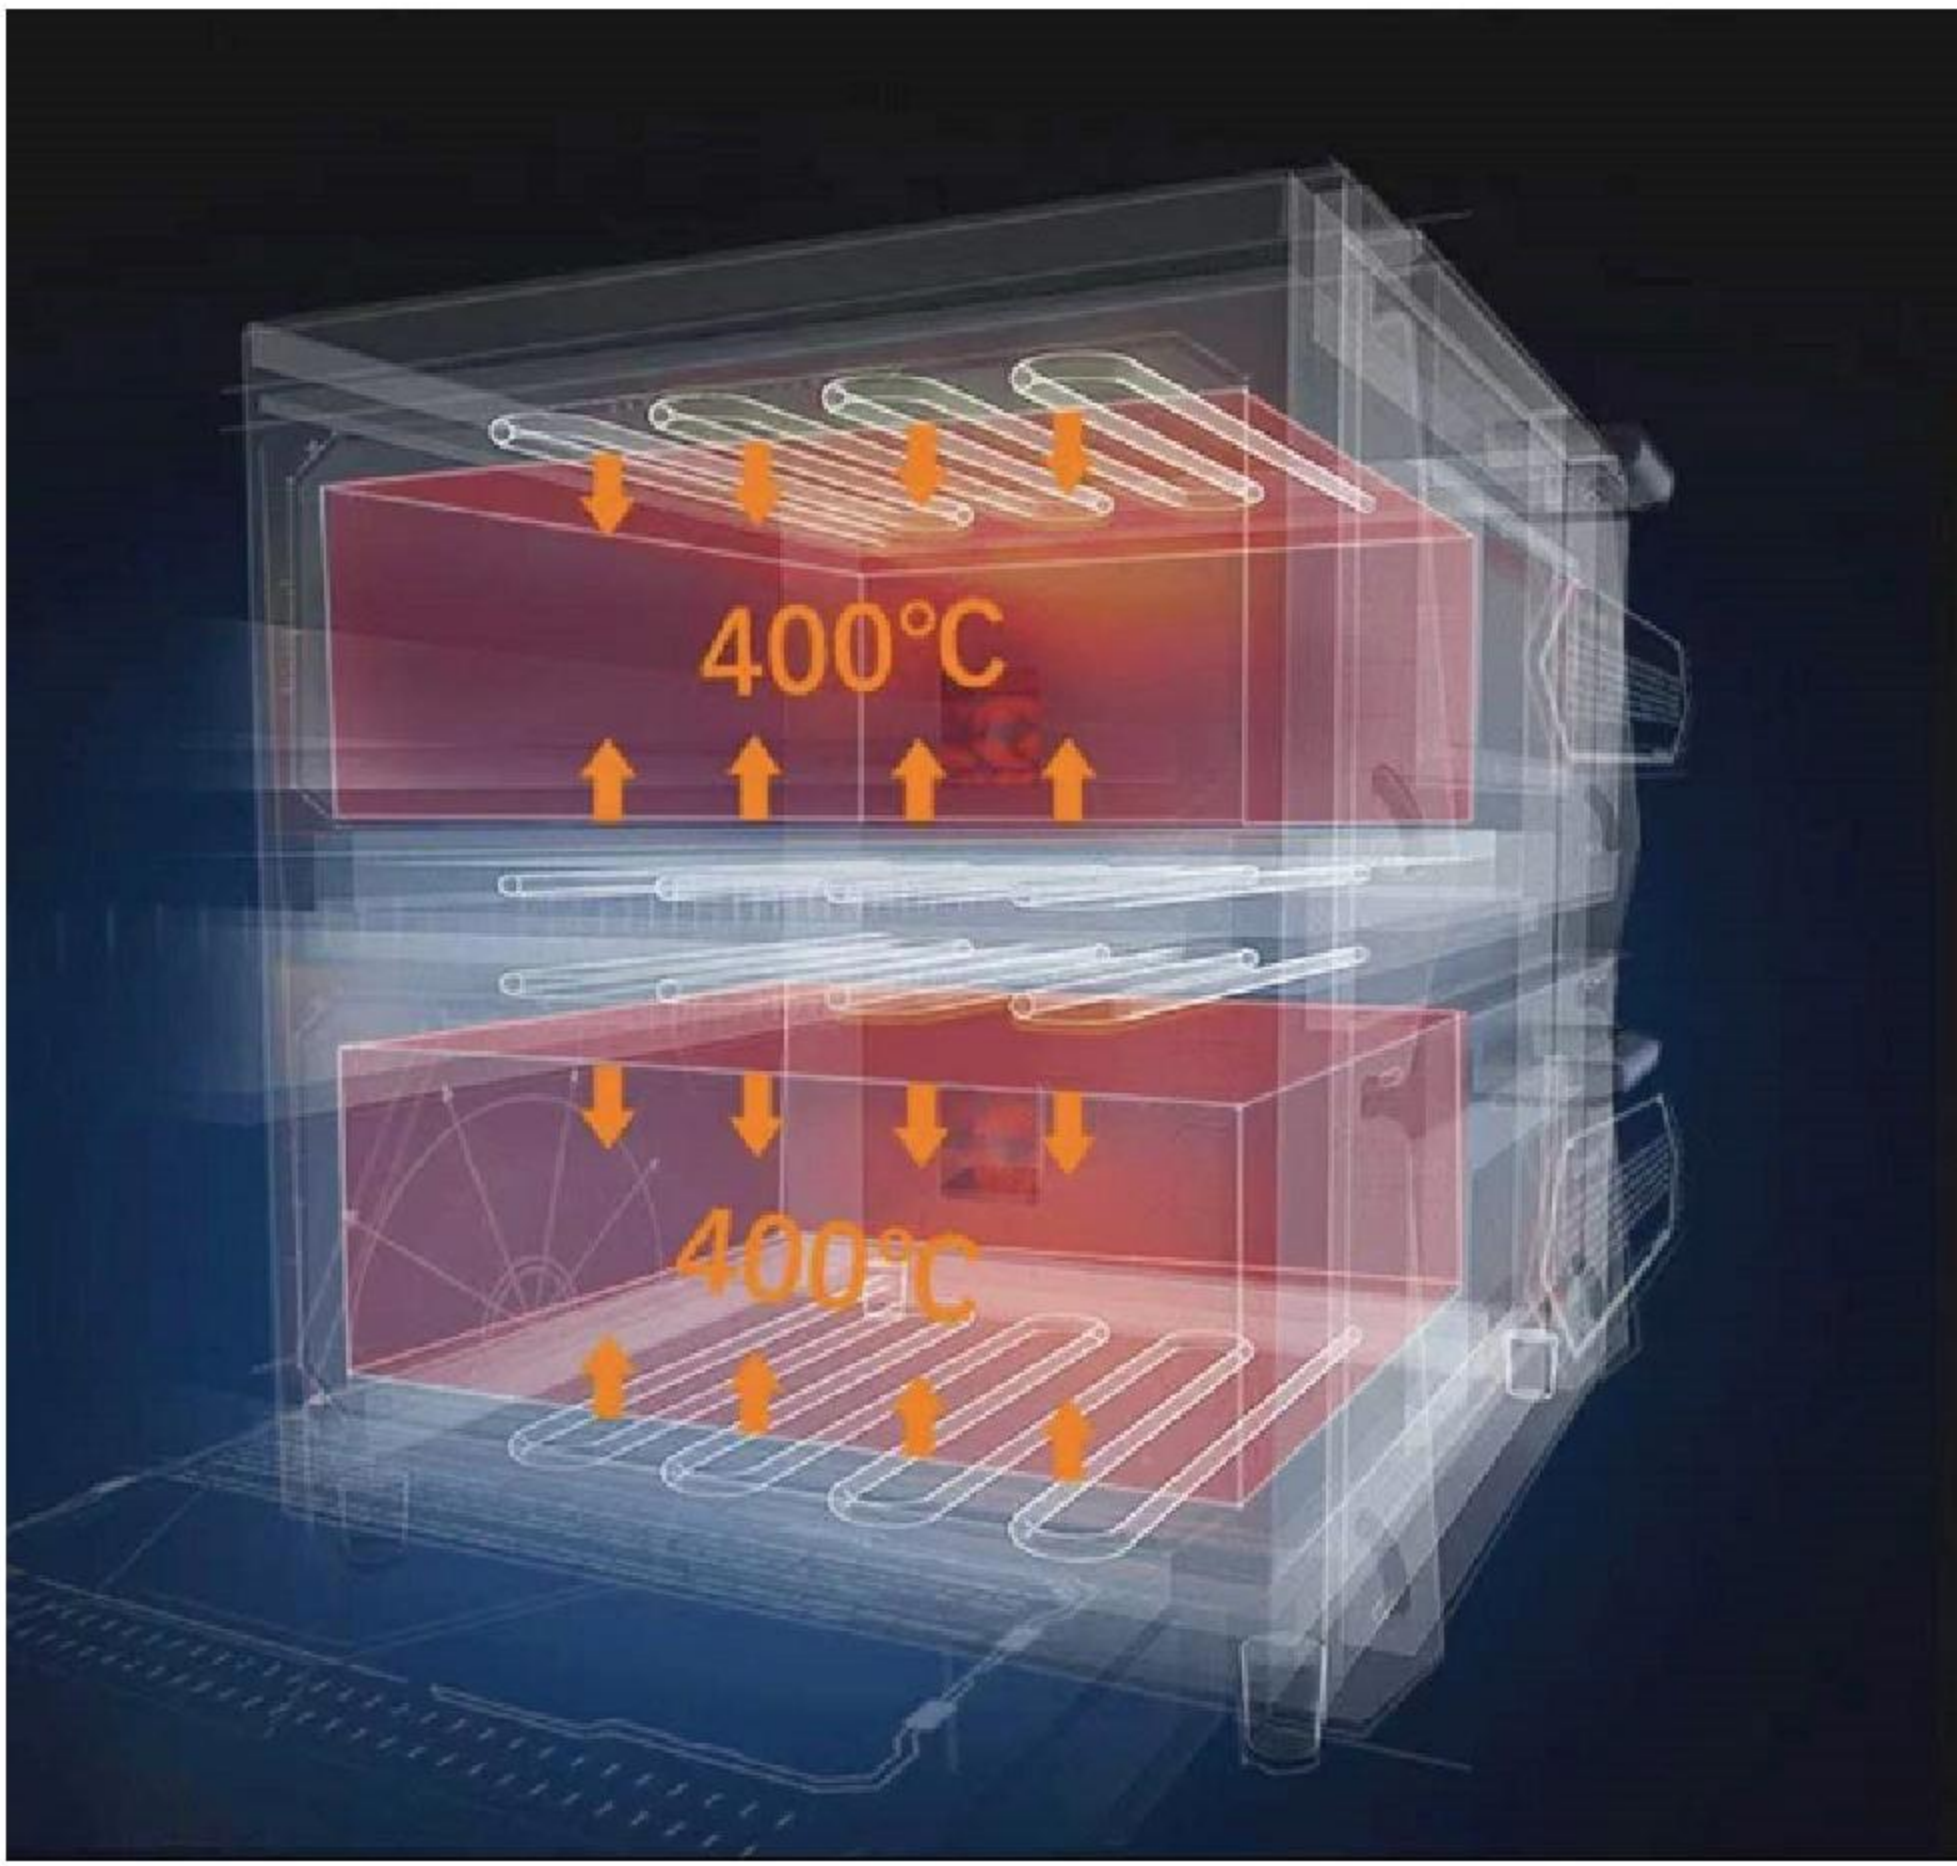

Gas Convection Oven



Model	Voltage	Power	BTU/H	Dimension(mm)
MF-COE	220~240V/50Hz	10	54000	970*1130*1520
MF-COE-2		20	54000x2	970*1130*1750

Gas Oven

Model	Voltage	Gas Type	Capacity	Size(mm)
GO-102QE	220~240V/ 50Hz	LPG/ Natural Gas	1 layer 1 tray	1350*920*680
GO-204QE			2 layers 4 trays	1340*920*1330
GO-306QE			3 layers 6 trays	1340*920*1750
GO-309QE			3 layers 9 trays	1810*970*1800



GO-102QE

GO-204QE

GO-306QE



GO-101Q

GO-202Q

GO-303Q

Model	Voltage	Gas Type	Capacity	Size(mm)
GO-101Q	220V/50Hz	LPG/ Natural Gas	1 layer 2 trays	1000*730*550
GO-102Q				1350*920*680
GO-103Q				1810*970*810
GO-202Q			2 layers 4 trays	1000*730*1133
GO-204Q				1340*920*1330
GO-206Q				1810*970*1328
GO-303Q			3 layers 6 trays	1000*730*1700
GO-306Q				1340*920*1750
GO-309Q				1810*970*1800



Electric Oven

- Stainless steel construction
- Stainless steel front panel
- Cool-touch door handle
- Independent charmbers can be operated at different temperatures



Model	Voltage	Power(kW)	Capacity	Size(mm)
EO-102DE	220~380V/50Hz	6.6	1 layer 2 trays	1220*850*580
EO-204DE	380V/50Hz	13.2	2 layers 4 trays	1220*850*1230
EO-206DE		16	2 layers 6 trays	1700*930*1295
EO-306DE		19.8	3 layers 6 trays	1220*850*1645
EO-309DE		24	3 layers 9 trays	1640*850*1645



EO-102DE

EO-204DE

EO-306DE



EO-101D

EO-202D

EO-303D

Electric Oven



Model	Voltage	Power(kW)	Capacity	Size(mm)
EO-101D	220~380V/50Hz	4.4	1 layer 1 tray	920*640*410
EO-102D		6.6	1 layer 2 trays	1220*850*580
EO-103D		8	1 layer 3 trays	1700*900*620
EO-202D		8.8	2 layers 2 trays	920*640*800
EO-204D	380V/50Hz	13.2	2 layers 4 trays	1220*850*1230
EO-206D		16	2 layers 6 trays	1700*930*1295
EO-303D		13.2	3 layers 3 trays	920*640*1100
EO-306D		19.8	3 layers 6 trays	1220*850*1645
EO-309D		24	3 layers 9 trays	1700*900*1695

Electric Proofer

- Can put **3 layers of baking tray**
- Adjustable temperature 5-60 ℃
- Adjustable **humidity 50-99%**
- 2-stage **automatic fermentation** and water vapor atomization fermentation function
- Built-in water storage box

MODEL FH40



MODEL EP-13



Model	Voltage	Power(kW)	No. of Trays	Size(mm)
EP-13	220~240V/50Hz	2.6	13	490*690*1660
EP-16		2.6	16	490*690*1800

Model	Voltage	Power(kW)	No. of Trays	Size(mm)
FH60	220~240V/50Hz	0.55	8	636*647*870
FH120	220~240V/50Hz	0.55	8	838*745*830
FH40	220~240V/50Hz	0.3	3	490*490*506



MODEL FH60



MODEL EP-26



Model	Voltage	Power(kW)	No. of Trays	Size(mm)
EP-26	220~240V/50Hz	2.8	26	1000*690*1660
EP-32			32	1000*690*1880

Electric Proofer

- Can put **3 layers of baking tray**
- Adjustable temperature 5-60 ℃
- Adjustable **humidity 50-99%**
- 2-stage **automatic fermentation** and water vapor atomization fermentation function
- Built-in water storage box



Model	Voltage	Power(kW)	No. of Trays	Temperature	Capacity
EP-18LC	220~240V/50Hz	1.6	18	-5 ℃	590*1020*1800
EP-36LC		1.8	36	-5 ℃	780*1220*2100
EP-18LD		1.6	18	-5 ℃	590*1020*1800
EP-36LD		1.8	36	-5 ℃	780*1220*2100

MODEL EP-18LC



Multifunction Oven

- Stainless steel construction
- Temperature adjustable from 50-350 ℃
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



Model	Voltage	Power(kW)	Size(mm)
EOA-81Y	3N~380V/50Hz	9	847*771*1060
EOA-10-MP		18	850*770*1050
EOA-10-CMP		18	850*770*1050
EOA-10-AC		36	850*770*1050



EOA-81Y



EOA-10-MP



EOA-10-CMP




EOA-10-AC

Multifunction Oven

- Stainless steel construction
- Temperature adjustable from 50-350 °C
- Fibreglass insulation
- Extremely heat-resistant
- Ideal for baking directly on the firebrick



Model	Voltage	Power(kW)	Size(mm)
EOA-61-CMP	3N~380V/50Hz	19	850*770*785
EOA-61-AC		19	850*770*780
EOA-61-MP		18	850*770*780

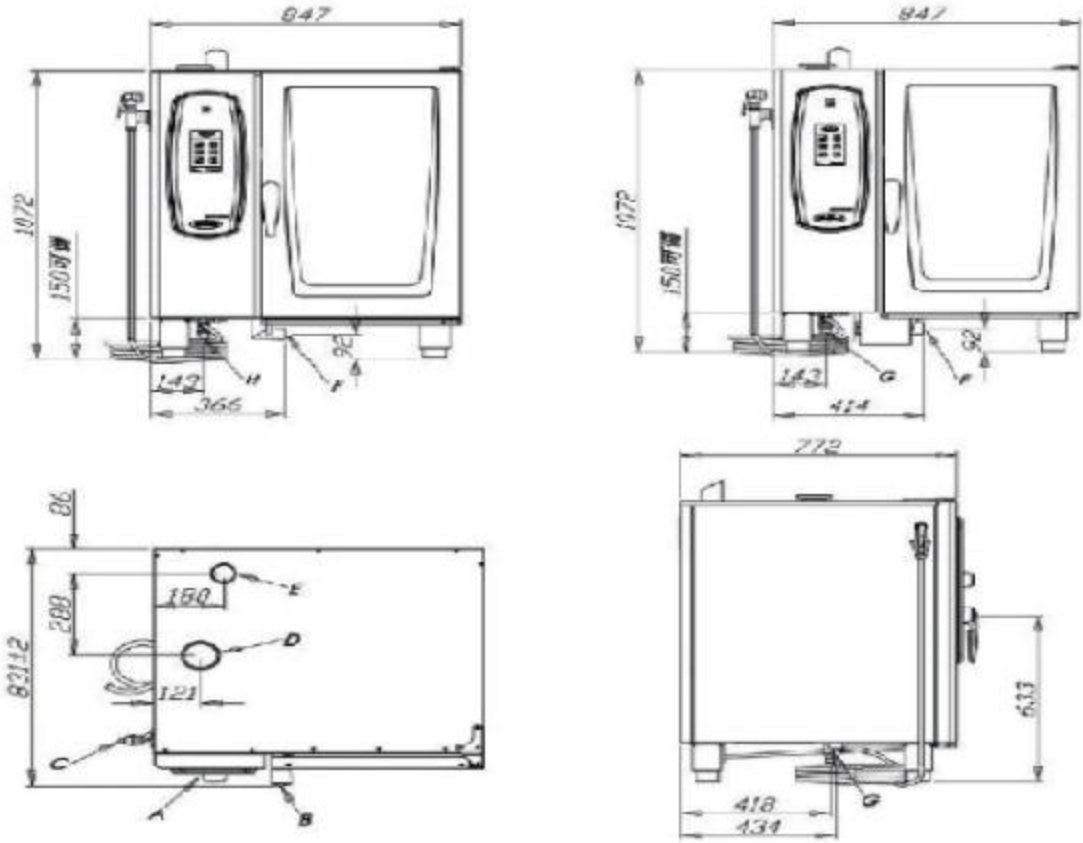

EOA-61-CMP



EOA-61-AC



EOA-61-MP



EOA-20-CMP



EOA-20-AC



Model	Voltage	Power(kW)	Size(mm)
EOA-61-CMP	3N~380V/50Hz	19	850*770*785
EOA-61-AC		19	850*770*780
EOA-61-MP		18	850*770*780



EOA-61-MX



EOA-41-MX



EOA-51F



EOA-81F



Model	Voltage	Power(kW)	Size(mm)
EOA-61-MX	3N~380V/50Hz	6	687*681*740
EOA-41-MX		6	687*681*642
EOA-51F		9	817*771*782
EOA-81F		9	817*771*1060

Gas Rotary Oven

- Room temperature~300 ℃
- Neutral packaging
- Inner chamber rotating frame

Model	Voltage	Power	Size(mm)
GO-16Q	380v	2.84kw	2290*1280*2420
GO-32Q	380v	3.5kw	1902*2630*2535
GO-64Q	380v	5.5kw	2073*3145*2535

MODEL GO-16Q



MODEL GO-32Q



MODEL GO-64Q



Rice Ccooker

- Product body material is 201 stainless steel
- Anti-dry burning water shortage device



		RS-6E	RS-6G
Voltage	V / HZ	220 / 50	220 / 50
Power	W	8	9
Food tray size	L	600*400*48	600*400*48
Dimension	mm	720*670*1050	720*670*1050
Pressure	/	/	LPG gas

Oil Filter Cart

- All 201 stainless steel material
- Cardboard box + plywood packaging

		OF03	OF48L
Voltage	V / HZ	220 / 50	220 / 50
Power	W	200	550
Capacity	L	48	48
Cylinder size	mm	630*350*230	715*390*220
Oil filter paper size	mm	280*380	/
Spacer box size	mm	345*135	/
Dimension	mm	880*420*340	850*415*615
Carton	mm	900*450*390	850*455*620
Wooden frame	mm	930*480*420	858*490*680
NW	kg	31.2	36.6
GW	kg	35	39.2

OF48L



MODEL RS-6E RS-6G



MODEL OF03



Electric Fryer

Thermostat, temperature limiter, micro switch, oil valve, heating indicator (orange), power indicator (green)



MODEL EF-101N



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
EF-101N	220-240V/50~60Hz	3	10	280*470*330
EF-102N		3+3	10+10	565*420*327

MODEL EF-102N



Chicken Roaster

- Material /Thickness:
- Temper Glass 6mm thicker
- Body: 201 thick 1.0mm, hook: 201 thick 1.3mm
- Wooden box packing
- Motor Power/ Motor Rotate speed:13W / 6 turns a motor

Model	Capacity	Size(mm)	N.W/G.W
CR-3Q	15-18	1180*490*830	65/90KG
CR-6Q	30-36	1180*490*1380	105.6/140KG
CR-9Q	45-54	1180*490*1930	143/170KG
CR-3D	15-18	1180*490*830	58/90KG
CR-6D	30-36	1180*490*138	96.5/140KG
CR-9D	45-54	1180*490*1930	160/170KG

MODEL CR-6Q



MODEL CR-9D

