



广州参越食品机械有限公司

GUANGZHOU SANYUE FOOD EQUIPMENT CO.,LTD
MARCHEF CO.,LIMITED

+86-18816804012 / 0086-02031360549

yi@marchef.cn admin@marchef.cn

www.marchef.cn
www.marchefchina.com
www.gzmarchef.en.alibaba.com

/ Marchef China

Exp Dept Add:Building 5.No.3 Meishan Street,Dalong
Stree.Panyu District,Guangzhou City

Factory Add :No.38 Chadong Rd.Shiji Town.Panyu
Guangzhou City

Factory Add: No 20 .Shenghui Rd.NantouTown.



2023

Food Preparation Equipment

Product Brochure

CATALOGUE

PACKIN MACHINE

- 02 Vacuum Machine
- 03 Vacuum Tumbler
- 04 Tray Sealer
- 04 Manual Sausage Clipper
- 04 Plastic Film Sealer
- 05-06 Cup Sealing Machine

BAKERY EQUIPMENT

- 08 Electric Pizza Oven
- 09-11 Electric Oven
- 12 Gas Oven
- 13-18 Convection Oven
- 19 Electric Proofer
- 20 Pizza Conveyor Oven
- 21-22 Multifunction Oven
- 23 Small Counter top Dough Mixer
- 24 Fresh milk dispenser
- 25-26 Spiral Mixer
- 28 Planetary Mixer
- 29 Food mixer
- 30 Dough Mixer
- 31 Dough Divider
- 32 Dough Sheeter
- 33 Cake smearing machine
- 33 Shaping machine
- 34 Pizza Machine
- 34 Bread Slicer
- 35 Noodle presses
- 36 Pasta Maker

FOOD PROCESSOR

- 38 Manual Sausage Stuffer
- 39 Electric Sausage Stuffer
- 40 Manual Sausage Slicer
- 41 Meat Slicer
- 42-44 Meat Grinder
- 45 Bone Saw
- 46 Meat Mixer
- 47 Meatball Forming Machine
- 47 Meatball Beater
- 48 Combo Plucker with Scalding
- 49 Electric Scalding
- 50 Potato Peeler
- 51 Meat Tenderizer
- 51 Hamburger Press
- 52 Bowl Cutter
- 53 Vegetable Cutter
- 54 Vegetable Slicer
- 55 Potato Spiral Slicer
- 55 French Fry Cutter
- 56 Onion Cutter
- 56 Tomato Cutter
- 57 Sugar Cane Juicer
- 58-61 Ice Crusher
- 62 Orange Juicer
- 63 Juice Extractor
- 63-66 Manual Orange press machine
- 67-68 Immersion Blender



PACKIN MACHINE



Vacuum Machine

Metal case, high-grade and durable
3 sealing modes (dry, wet and manual), choose the modes based on your different types of food.
Equipped with external vacuum pumping, it is available for bottle like wine.
Rolling bag slot in vacuum sealer prevents the rolling bag from being dropped.
Built-in cutter so you can create custom-sized bags without using scissors



DZ-400F



DZ-260T



Model	Voltage	Power(kW)	Size(mm)
DZ-400F	220-240V/50-60Hz	1.4	550*490*970
DZ-400FD	220-240V/50-60Hz	1.4	550*490*970
DZ-500F	220-240V/50-60Hz	1.5	652*578*982



Model	Voltage	Power(kW)	Size(mm)
DZ-260T	220-240V/50-60Hz	0.48	510*350*390
DZ-400T	220-240V/50-60Hz	0.9	550*490*550

Vacuum Tumbler



CE ⚡				
Model	Voltage	Power(kW)	Capacity	Size(mm)
VT-38	220-240V/50-60Hz	0.24	38L	750*410*815
VT-45	220-240V/50-60Hz	0.24	45L	860*460*935
VT-60	220-240V/50-60Hz	0.33	60L	890*490*1000
VT-2D	220-240V/50-60Hz	0.03	18L	620*307*465



Tray Sealer

CE ⚡				
Model	Power(kw)	Voltage	Width(mm)	size(mm)
IWM-450	0.33	220V/50Hz	450	700*540*660
IWM-550	4	220V/50Hz	550	875*650*675

Tray Sealer

CE ⚡				
Model	Power(kw)	Voltage	Packing speed(min)	size(mm)
TDQ-1	1	220V/50Hz	7-8	630*256*260
TDQ-2	0.6	220V/50Hz	7-8	630*256*260
TDQ-3	1	220V/50Hz	7-8	660*330*290
TDQ-4	0.8	220V/50Hz	7-8	650*296*260



Manual Sausage Clipper

Include 1000 Aluminum Clips/Set
Material: ABS Shell + Nylon + Steel Steel 201 + Iron with Chrome-plated

CE ⚡			
Model	Clip	Nail length(mm)	Size(mm)
D-1	502/506/503/508	11/11.5/13/14	400*180*610



Plastic Film Sealer

CE ⚡				
Model	Power(kw)	Max.sealing lenth(mm)	Heat time(s)	size(mm)
MF-200I	0.3	200	0.2-1.5	530*360*380
MF-200A	0.3	200	0.2-1.5	80*320*150
MF-200P	0.3	200	0.2-1.5	520*350*380
MF-300I	0.3	300	0.2-1.5	500*110*200
MF-300A	0.4	300	0.2-1.5	85*450*180
MF-300P	0.3	300	0.2-1.5	500*110*200
MF-400I	0.3	400	0.2-1.5	590*110*200
MF-400A	0.6	400	0.2-1.5	540*90*180
MF-400P	0.3	400	0.2-1.5	540*90*180



Cup Sealing Machine




Model	Voltage	Power(kW)	Capacity(cup/h)	Size(mm)
CSM-S2	220-240V/50-60Hz	0.3	300-400	205*305*380
CSM-D6	220-240V/50-60Hz	0.3	300-400	206*350*360



CSM-S2



CSM-D6

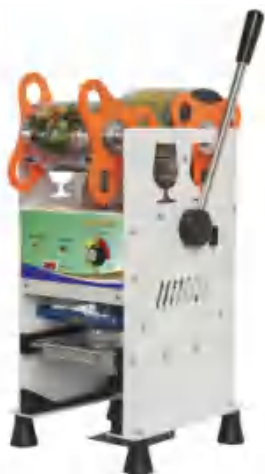

CSM-D1



CSM-B9



CSM-D8



Model	Voltage	Power(kW)	Capacity(cup/h)	Size(mm)
CSM-D1	220-240V/50-60Hz	0.3	300-400	205*265*460
CSM-B9	220-240V/50-60Hz	0.315	300-400	270*260*480
CSM-D8	220-240V/50-60Hz	0.3	300-400	205*265*460



Cup Sealing Machine



Model	Voltage	Power(kW)	Capacity(cup/h)	Size(mm)
CSM-H3	220-240V/50-60Hz	0.36	300-500	250*340*550
CSM-Q7	220-240V/50-60Hz	0.36	300-400	282*370*540



CSM-H3



CSM-Q7



CSM-A9



CSM-Q9



CSM-D9



Model	Voltage	Power(kW)	Capacity(cup/h)	Size(mm)
CSM-A9	220-240V/50-60Hz	0.34	300-400	282*370*540
CSM-Q9	220-240V/50-60Hz	0.36	300-400	282*370*540
CSM-D9	220-240V/50-60Hz	0.3	300-400	205*265*570

BAKERY EQUIPMENT

Electric Pizza Oven

Feature
Stainless steel construction
Temperature adjustable from 50-350 C
Fibreglass insulation
Extremely heat-resistant
Ideal for baking directly on the firebrick

CE ⚡

Model	voltage	Power(kW)	Size(mm)
EP-1ST	220-240V/50-60Hz	2	585*550*280
EP-1AT	220-240V/50-60Hz	2.5	496*490*350
EP-2ST	220-240V/50-60Hz	3	560*570*440
EP-2PT	220-240V/50-60Hz	3	560*570*440



EP-1ST



EP-2ST



KPZ-60M



EP8T

CE ⚡

Model	voltage	Power(kW)	Size(mm)
KPZ-60M	220-240V/50-60Hz	3.6	635*640*411
KPZ-120M	220-240V/50-60Hz	4.7	838*740*411

CE ⚡

Model	voltage	Power(kW)	Size(mm)
EP4T	~3N-380V/220-240V	5	950*905*420
EP6T	~3N-380V/220-240V	6.81	950*1235*420
EP8T	~3N-380V/220-240V	9	950*905*740
EP12T	~3N-380V/220-240V	13.8	975*1230*745

ELECTRIC PIZZA OVEN



Electric Oven

- Stainless steel construction
- Stainless steel front panel
- Cool-touch door handle
- Independent charmbers can be operated at different temperatures



KPS-11



KPS-22



KPS-24



KPS-36



KPS-11A



KPS-12A



KPS-22A



KPS-36A



Model	voltage	Power(kW)	Dimension(mm)
KPS-11	220-240V/50Hz	3.2+2	930*590*445
KPS-12	220-240V/50Hz	6.62+2	1160*790*445
KPS-22	220-240V/50Hz	6.62+2	930*590*825
KPS-24	220-240V/50Hz	13.2+2	1160*795*825
KPS-36	220-240V/50Hz	19.8+2	1160*795*1205



Model	voltage	Power(kW)	Dimension(mm)
KPS-11A	220-240V/50Hz	3.2+2	930*590*445
KPS-12A	220-240V/50Hz	6.4+2	1160*795*445
KPS-22A	220-240V/50Hz	6.62+2	930*590*825
KPS-24A	220-240V/50Hz	13.2+2	1160*795*825
KPS-36A	220-240V/50Hz	19.8+2	1160*795*1205



Electric Oven

Stainless steel construction
Stainless steel front panel
Cool-touch door handle
Indpendent charmbers can be operated at different temperatures

Model	voltage	Power(kW)	Capacity	Size(mm)
EO-102DE	220-240V/50-60Hz	6.6	1 layer 2 trays	1220*850*580
EO-204DE	380V/50Hz	13.2	2 layers 4 trays	1220*850*1230
EO-206DHT	380V/50Hz	16	2 layers 6 trays	1220*850*1230
EO-306DE	380V/50Hz	13.2	3 layers 6 trays	1220*850*1645
EO-309DHT	380V/50Hz	24	3 layers 9 trays	1220*850*1230



EO-102DE

EO-204DE

EO-306DE



EO-101D

EO-202D

EO-303D

Model	voltage	Power(kW)	Capacity	Size(mm)
EO-101D	220~380V/50Hz	4.4	1 layer 1 tray	920*640*410
EO-102D	220~380V/50Hz	6.6	1 layer 2 trays	1220*850*580
EO-103D	220~380V/50Hz	8	1 layer 3 trays	1640*800*590
EO-202D	220~380V/50Hz	8.8	2 layers 2 trays	920*640*800
EO-204D	380V/50Hz	13.2	2 layers 4 trays	1220*850*1230

Model	voltage	Power(kW)	Capacity	Size(mm)
EO-206D	380V/50Hz	16	2 layers 6 trays	1700*930*1295
EO-303D	380V/50Hz	13.2	3 layers 3 trays	920*640*1100
EO-306D	380V/50Hz	19.8	3 layers 6 trays	1220*850*1645
EO-309D	380V/50Hz	24	3 layers 9 trays	1220*850*1230

Gas Oven



Model	voltage	Gas Type	Capacity	Size(mm)
GO-102QE	220~240V/50Hz	LPG/Natural Gas	1 layer 1 tray	1350*920*680
GO-204QE	220~240V/50Hz	LPG/Natural Gas	2 layers 4 trays	1340*920*1330
GO-306QE	220~240V/50Hz	LPG/Natural Gas	3 layers 6 trays	1340*920*1750
GO-309QE	220~240V/50Hz	LPG/Natural Gas	3 layers 9 trays	1810*970*1800



GO-102QE

GO-204QE

GO-306QE



GO-101Q

GO-202Q

GO-303Q

Model	voltage	Gas Type	Capacity	Size(mm)
GO-101Q	220-240V/50-60Hz	LPG/Natural Gas	1 layer 1 tray	1000*730*550
GO-102Q	220-240V/50-60Hz	LPG/Natural Gas	1 layer 2 trays	1350*920*680
GO-103Q	220-240V/50-60Hz	LPG/Natural Gas	1 layer 3 trays	1810*970*810
GO-202Q	220-240V/50-60Hz	LPG/Natural Gas	2 layers 2 trays	1000*730*1133
GO-204Q	220-240V/50-60Hz	LPG/Natural Gas	2 layers 4 trays	1340*920*1330

Model	voltage	Gas Type	Capacity	Size(mm)
GO-206Q	220-240V/50-60Hz	LPG/Natural Gas	2 layers 6 trays	1760*890*1330
GO-303Q	220-240V/50-60Hz	LPG/Natural Gas	3 layers 3 trays	1000*730*1700
GO-306Q	220-240V/50-60Hz	LPG/Natural Gas	3 layers 6 trays	1340*920*1750
GO-309Q	220-240V/50-60Hz	LPG/Natural Gas	3 layers 9 trays	1810*970*1800



Convection Oven

U-shaped heating tube provide more quick heat-up
Antirust stainless steel 201 structure ensure longer life
Non-skid rubber feet prevent slipping
Built-in high temperature resistant lighting, the food status is clearly visible, and it is convenient to check the food status.
360° heat dissipation to ensure collective heat dissipation and lengthen service life of the machine
Double-layer tempered glass is crystal clear and translucent,high-strength insulation and improves thermal efficiency.
Water inlet design is an auxiliary device with spray function, which helps food fermentation



CO-1F



CO-2F



CO-6F



CO-8F

Model	voltage	Power(kW)	Size(mm)
CO-1F	220-240V/50Hz	2.3	595*530*570
CO-2F	220-240V/50Hz	2.67	460*570*460
CO-4F	220-240V/50Hz	2.67	595*600*580

Model	voltage	Power(kW)	Size(mm)
CO-6F	220-240V/50Hz	2.67	695*600*580
CO-8F	220-240V/50Hz	3.1 ro 5.1	835*770*575



EC01-E



EC03D



EC01C



EC01F

Model	voltage	Power(kW)	Size(mm)
EC01-E	220-240V/50-60Hz	6	880*800*600
EC01C	220-240V/50-60Hz	4.5	670*650*470

Model	voltage	Power(kW)	Size(mm)
EC03D	220-240V/50-60Hz	2.5	670*650*395
EC01F	220-240V/50-60Hz	4.5	590*650*560



Convection Oven

Stainless steel material which is safe and rustproof; Easy to use and convenient
High-performance Motor Brings Uniform Baking
Skewer can rotate left and right
Plastic handle to avoid scratches
Inbuilt drip tray keeps machine clean and mess-free

CE ⚡

Model	voltage	Power(kW)	Size(mm)
CK03D	220-240V/50-60Hz	2.5	670*650*395
CK02C	220-240V/50-60Hz	4.5	675*640*500
CK02E	220-240V/50-60Hz	6	920*815*600

Convection Oven

Stainless steel material which is safe and rustproof; Easy to use and convenient
High-performance Motor Brings Uniform Baking
Skewer can rotate left and right
Plastic handle to avoid scratches
Inbuilt drip tray keeps machine clean and mess-free

CE ⚡

Model	voltage	Power(kW)	Size(mm)
CO-5DJ	380V/50Hz	7.5	905*1280*1570
CO-5DHJ	380V/50Hz	7.5	905*1280*1570



CK03D



CK02C



CO-5DJ



CO-5DHJ



CO-5D



CO-5DH



CO-8D



CO-8DH

CE ⚡

Model	voltage	Power(kW)	Size(mm)
CO-5D	380V/50Hz	7.5	905*1280*955
CO-5DH	380V/50Hz	7.5	905*1280*955

CE ⚡

Model	voltage	Power(kW)	Size(mm)
CO-5QH	220-240V/50-60Hz	7.5	905*1450*955
CO-5Q	220-240V/50-60Hz	7.5	905*1450*955


CE ⚡

Model	voltage	Power(kW)	Size(mm)
CO-8D	380V/50Hz	15	905*1280*1280
CO-10D	380V/50Hz	15	905*1280*1520
CO-8DH	380V/50Hz	7.5	905*1280*1280
CO-10DH	380V/50Hz	7.5	905*1280*1520

CE ⚡

Model	voltage	Power(kW)	Size(mm)
CO-8QH	220-240V/50-60Hz	1.1	905*1450*1280
CO-10QH	220-240V/50-60Hz	1.1	905*1450*1520
CO-8Q	220-240V/50-60Hz	1.1	905*1450*1280
CO-10Q	220-240V/50-60Hz	1.1	905*1450*1520

Convection Oven

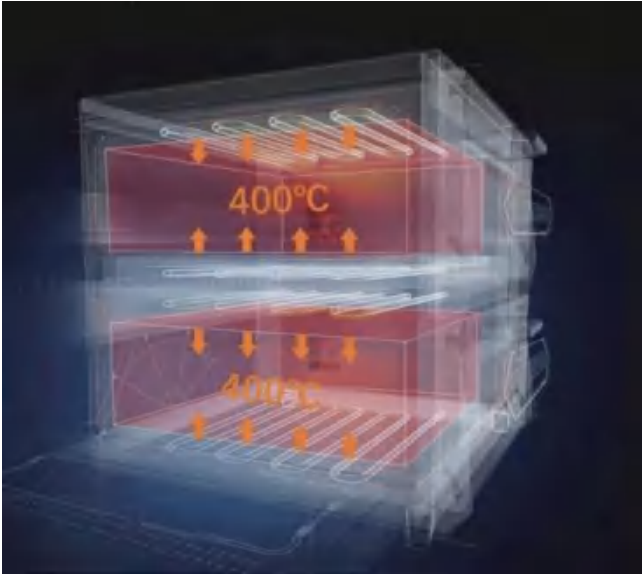

Convection Oven

U-shaped heating tube provide more quick heat-up
Antirust stainless steel 201 structure ensure longer life
Non-skid rubber feet prevent slipping
Built-in high temperature resistant lighting, the food status is clearly visible, and it is convenient to check the food status.
360° heat dissipation to ensure collective heat dissipation and lengthen service life of the machine
Double-layer tempered glass is crystal clear and translucent, high-strength insulation and improves thermal efficiency.
Water inlet design is an auxiliary device with spray function, which helps food fermentation



CK06-60



CKF-60



CK06-95L



CKF-120



MF-COE/208



MF-COE/208-2

Feature

- Precision temperature control, adjustment range 66 °C -260 °C
- Antirust stainless steel 201 structure ensure longer life
- 60 minutes timer reminder function
- Fully enamel inner chamber is easy to clean
- Two-speed motor speed 950-1437 rpm
- Professional ignition control module with hot surface ignition is safe and reliable
- Reversible control panel, easy and reliable maintenance
- Single layer use, or double layer stacking to make better use of

Model	voltage	Power(kW)	GW(kg)	Dimension(mm)
MF-COE/208	208V/3 phase	10	21.9	970*1130*1520
MF-COE/240	240V/single phase	10	21.9	970*1130*1520
MF-COE/208-2	208V/3 phase	10	43.8	970*1130*1760
MF-COE/240-2	240V/single phase	10	43.8	970*1130*1760

Model	voltage	Power(kW)	Size(mm)
CK06-60	220-240V/50Hz	4	636*640*614
CK06-60L	220-240V/50Hz	3.5	636*704*659
CK06-95	220-240V/50Hz	4	840*745*644
CK06-95L	220-240V/50Hz	4	840*809*659
CK06-120	220-240V/50Hz	6	840*785*744
CK06-120L	220-240V/50Hz	6	840*849*789

Model	voltage	Power(kW)	Size(mm)
CKF-60	220-240V/50Hz	2.7+2	636*645*571
CKF-60L	220-240V/50Hz	2.7+2	636*669*639
CKF-120	220-240V/50Hz	4	840*755*659
CKF-120L	220-240V/50Hz	4	840*755*659



Electric Proofer



Model	voltage	Power(kw)	NW/GW(kg)	Size(mm)
FH40	220-240V	0.3	18/20	490*490*506
FH60	3N-380V/220-240V	0.5	52.5/55	636*647*870
FH120	3N-380V/220-240V	0.5	52.5/55	838*745*830



FH60



EP-13



EP-26



EP-18LC



Model	voltage	Power(kW)	No. of Trays	Size(mm)
EP-13	220-240V/50Hz	2.6	13	490*690*1660
EP-16	220-240V/50Hz	2.6	16	490*690*1800
EP-26	220-240V/50Hz	2.6	26	1000*690*1660
EP-32	220-240V/50Hz	2.6	32	1000*690*1880



Model	voltage	Power(kW)	No. of Trays	Size(mm)
EP-18LC	220-240V/50Hz	1.6	18	590*1020*1800
EP-36LC	220-240V/50Hz	1.8	36	780*1220*2100
EP-18LD	220-240V/50Hz	1.6	18	590*1020*1800
EP-36LD	220-240V/50Hz	1.8	36	780*1220*2100



Pizza Conveyor Oven

Easily adjustable for any dough thickness
Reversible belt and durable stainless steel body for versatile, high-volume use
Conveniently sits on the countertop to open up floor space; folds up for compact storage



HP-13E



HP-33E



HP-33G



Model	voltage	Power(kw)	N.W/G.W.(kg)	Dimension(mm)
HP-13E	380V/50Hz	6.3	200/230	1270*920*450
HP-19E	380V/50Hz	10.5	230/260	1580*1175*450
HP-33E	380V/50Hz	27.5	260/290	2070*1450*575
HP-13G	220V/50Hz	0.3	200/230	1270*920*450
HP-19G	220V/50Hz	0.3	200/230	1270*920*450
HP-33G	220V/50Hz	0.5	260/290	2070*1450*575



Multifunction Oven

Stainless steel construction
Temperature adjustable from 50-350 °C
Fibreglass insulation
Extremely heat-resistant
Ideal for baking directly on the firebrick



EOA-61-CMP



EOA-10-CMP



EOA-20-CMP



EOA-61-AC



EOA-10-AC



EOA-20-AC



Model	voltage	Power(kW)	Size(mm)
EOA-61-CMP	3N~380V	9+10	850*770*785
EOA-10-CMP	3N~380V	18+18	850*770*1050
EOA-20-CMP	3N~380V	18+36	900*790*1880



Model	voltage	Power(kW)	Size(mm)
EOA-61-CMP	3N~380V	9+10	850*770*785
EOA-10-CMP	3N~380V	18+18	850*770*1050
EOA-20-CMP	3N~380V	18+36	900*790*1880



EOA-41-MX



EOA-61-MX



EOA-61-MP



EOA-51F



EOA-81F



Model	voltage	Power(kW)	Size(mm)
EOA-41-MX	220V	6	687*681*642
EOA-61-MX	220V	6	830*830*940
EOA-61-MP	3N~380V	18	850*770*780



Model	voltage	Power(kW)	Size(mm)
EOA-51F	3N-680V	9	817*771*782
EOA-81F	3N-680V	9	817*771*1060

Small Counter top Dough Mixer

Feature
Spiral mixer design mixes dough more efficiently than other mixing styles
Ideal for bakeries and pizzerias that use large amounts of dough
Various capacity available: 3/5/10/20/30/40/50/60L,etc
Intelligent control, operate easily.



HS-3L



HS-5L



HS-10L



Model	Voltage	Power(kW)	Mixing Flour Capacity	Bowl Capacity	Dimension(mm)
HS-3L	220-240V/50-60Hz	0.55	1.5Kg/3L	7L	470*260*440
HS-5L	220-240V/50-60Hz	0.55	2.5Kg/5L	10L	528*278*496
HS-10L	220-240V/50-60Hz	1.10	5Kg/10L	15L	630*340*600



Fresh milk dispenser

Feature
Various capacity available: 10/15/20/30/40/50/60L,etc
Planetary mixing action combines ingredients evenly and quickly
Gear-driven transmission powers through dense recipes
Bowl, whip, hook, and beater all are made of stainless steel

5 LITER

7 LITER


10 LITER



WIRE WHI



FLAT BEATER



DOUGH HOOK



B-5L



B-5LS



Model	Voltage	Power(kW)	Bowl Capacity	Dimension(mm)
B-5L	220-240V/50-60Hz	0.50	5L	380*240*375
B-7L	220-240V/50-60Hz	0.50	7L	380*240*405
B-10L	220-240V/50-60Hz	0.50	10L	380*240*445



Model	Voltage	Power(kW)	Bowl Capacity	Dimension(mm)
B-5LS	220-240V/50-60Hz	0.50	5L	380*240*375
B-7LS	220-240V/50-60Hz	0.50	7L	380*240*405
B-10LS	220-240V/50-60Hz	0.50	10L	380*240*445

Spiral Mixer



WIRE WHI



HS80A

Spiral mixer design mixes dough more efficiently than other mixing styles
Ideal for bakeries and pizzerias that use large amounts of dough
Various capacity available: 3/5/10/20/30/40/50/60L,etc
Intelligent control, operate easily.



HS20A



HS20B



HS100A



HS10C

HS20A-HS60A(Low) HS20A-D-HS60A-D(Fast Double Speed)



Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Size(mm)
HS20B	110-380V/50-60Hz	1.5kw	8Kg	20L	730*390*900
HS30B	110-380V/50-60Hz	1.5kw	12Kg	34L	750*435*900
HS40B	220V/50Hz 380V/60Hz	3kw	20Kg	45L	800*480*970
HS50B	220V/50Hz 380V/60Hz	3kw	20Kg	54L	850*510*970
HS60B	220V/50Hz 380V/60Hz	3kw	20Kg	64L	850*510*970

HS20B-HS60B(Low) HS20B-D-HS60B-D(Fast Double Speed)



Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Size(mm)
HS10B	110-380V/50-60Hz	0.75kw	4Kg	10L	550*340*530
HS20B	110-380V/50-60Hz	1.5kw	8Kg	20L	730*390*900
HS30B	110-380V/50-60Hz	1.5kw	12Kg	34L	750*435*900
HS40B	220V/50Hz 380V/60Hz	3kw	16Kg	45L	800*480*970
HS50B	220V/50Hz 380V/60Hz	3kw	20Kg	54L	850*510*970
HS60B	220V/50Hz 380V/60Hz	3kw	25	64L	850*510*970



Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Size(mm)
HS100A	110-380V/50-60Hz	4.1kw	40Kg	100L	1080*650*1380
HS130A	110-380V/50-60Hz	6.4kw	50Kg	130L	1160*730*1380
HS200A	110-380V/50-60Hz	8.6kw	75Kg	200L	1330*840*1560



Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Size(mm)
HS10C	110-380V/50-60Hz	1.1kw	5Kg	10L	520*290*670
HS20C	110-380V/50-60Hz	1.5kw	8Kg	20L	630*390*800
HS30C	110-380V/50-60Hz	1.5kw	12Kg	30L	720*440*870
HS40C	220V/50Hz 380V/60Hz	1.5kw	15Kg	40L	720*440*870
HS50C	220V/50Hz 380V/60Hz	2.2kw	15Kg	50L	720*440*870



Bakery Equipment

Look To Us For All Your Baking Equipment Needs



Planetary Mixer


Feature
Various capacity available: 10/15/20/30/40/50/60L,etc
Planetary mixing action combines ingredients evenly and quickly
Gear-driven transmission powers through dense recipes
Bowl, whip, hook, and beater all are made of stainless steel



WIRE WHI



FLAT BEATER



DOUGH HOOK



B10K



B20B

CE ⚡

Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Dimension(mm)
B10K	220-240V/50-60Hz	0.45kw	2Kg	10L	450*350*640
B20K	220-240V/50-60Hz	1.10kw	5Kg	20L	580*440*770
B30K	220-240V/50-60Hz	1.1kw	6Kg	30L	560*600*820
B40K	220-240V/50-60Hz	2.0kw	8Kg	40L	580*630*1105

CE ⚡

Model	Voltage	Power	Mixing Flour Capacity	Bowl Capacity	Dimension(mm)
B10B	220-240V/50-60Hz	0.37kw	1Kg	10L	450*350*640
B20B	220-240V/50-60Hz	1.1kw	3Kg	20L	550*435*780
B30B	220-240V/50-60Hz	1.5kw	6Kg	30L	560*435*862
B40B	220-240V/50-60Hz	2kw	8Kg	40L	640*500*1040

Food mixer




20 LITER 30 LITER 60 LITER



WIRE WHI



FLAT BEATER



DOUGH HOOK



B-20B



DOUGH MIXER



EMB-50K



EMB-100K



Model	Voltage	Power(kw)	Mixing Flour Capacity(kg)	Bowl Capacity()	Dimension(mm)
B-20A	220V/50Hz	1.5	5	20L	665*535*1000
B-30A	220V/50Hz	1.8	8	30L	680*540*1100
B-20B	220V/50Hz	1.5	5	20L	615*550*1140
B-30B	220V/50Hz	1.8	8	30L	666*560*1240



Model	Voltage	Power	Effectiveness	Capacity	Dimension(mm)
EMB-50K	220v/50Hz	2.2kw	50kg	130L	850*545*970
EMB-100K	3800v/50Hz	4kw	100Kg	275L	1560*820*1200



DD-30BS/36BS



DD-30S/36S



DD-36SH

CE ⚡					
Model	voltage	Power(kW)	Dough Weight(g/pc)	Output	Size(mm)
DD-30BS/36BS	220-380V/50Hz, 110V/60Hz	0.75	30~100	30pcs of dough/time	550*720*1350
DD-30S/36S	220-380V/50Hz, 110V/60Hz	0.75	30~100	30pcs of dough/time	710*810*1600
DD-36SH	220-380V/50Hz, 110V/60Hz	0.5	30~150	36pcs/once	420*450*1250



Dough Sheeter

Easily adjustable for any dough thickness
Reversible belt and durable stainless steel body for versatile, high-volume use
Conveniently sits on the countertop to open up floor space; folds up for compact storage
Perfect for bakeries or pizzerias



QSJ-400TL



QSJ-550L



QSJ-SM550

CE ⚡			
Model	Voltage	Power(kW)	Size(mm)
QSJ-400TL	220-240V/50-60Hz	0.4	1990*840*590
QSJ-550TL	220-240V/50-60Hz	0.55	2500*960*590

CE ⚡			
Model	Voltage	Power(kW)	Size(mm)
QSJ-550L	220-240V/50-60Hz	0.55	2700*960*1100
QSJ-400BL	220-240V/50-60Hz	0.4	2000*820*1040
QSJ-550BL	220-240V/50-60Hz	0.55	2700*960*1100
QSJ-650BL	220-240V/50-60Hz	0.75	3100*1060*1100

CE ⚡			
Model	Voltage	Power(kW)	Size(mm)
QSJ-SM550	220-240V/50-60Hz	0.55	2700*960*1100
QSJ-SM650	220-240V/50-60Hz	0.75	3100*1060*1100

Cake smearing machine



Model	Voltage	Power	N.W./ G.W.	Dimension(mm)
CSM-1560	220~240V/50Hz	0.3kw	25/35kg	500*350*550



CSM-1560



TM-380L



TM-750L

Shaping machine



Model	Voltage	Power(kw)	Dough Weight(g)	Dimension(mm)
TM-380L	220~240V/50Hz	0.75kw	50-600	1300*665*1050
TM-750L	220~240V/50Hz	0.75kw	50-1250	970*970*1600

Pizza Machine

Feature

Versatile machine perfect for creating house-made pizzas, pie crusts, pitas, and tortillas

Innovative weighted catch arm guides dough through rollers to eliminate need for manual adjustment

Two stage roller design produces consistent dough thickness with fewer passes through the machine

VQuickly and easily rolls out up to 250 pieces per hour with a maximum diameter of up to 18 inches

Ergonomic, compact design helps save on valuable countertop space and allows for easy storage



PM-30

Bread Slicer



BS-31B



Model	voltage	Power(kW)	Size(mm)
PM-30	220-240V/50-60Hz	0.37	340*505*700
PM-40	220-240V/50-60Hz	0.39	370*565*715



Model	voltage	Power(kW)	No. of Slices	Size(mm)
BS-25B	220-240V/50-60Hz	0.25	25	515*625*585
BS-31B	220-240V/50-60Hz	0.25	31	515*625*585
BS-39B	220-240V/50-60Hz	0.25	39	515*625*585
BS-53B	220-240V/50-60Hz	0.25	53	515*625*585



DPM-500A



Automatic dough pressing machine



Model	Voltage	Power	Dough Weight	Size(mm)
DPM-350A	380V/50Hz	2.2kw	600Kg/h	1130*610*1002
DPM-500A	380V/50Hz	3kw	900Kg/h	1300*770*1130



NM-300



NM-Y130

Noodle presses



Model	voltage	Power(kW)	Roller size(cm)	Size(mm)
NM-250	220V/50Hz	1.5	19	390*280*860
NM-300	220V/50Hz	2.2	24	440*280*860
NM-350	220V/50Hz	2.2	29	490*280*860

High speed noodle press



Model	voltage	Power(kW)	Roller size(cm)	Size(mm)
NM-Y110	220V/50Hz	2.2	25	590*650*1080
NM-Y130	220V/50Hz	2.2	30	640*670*1090



PASTA MAKER



NMT-160



NMT-160A



Model	voltage	Power(kW)	Size(mm)
NMT-160	220-240V/50-60Hz	0.55	370*325*405
NMT-180	220-240V/50-60Hz	0.55	390*325*405
NMT-200	220-240V/50-60Hz	0.55	410*325*405
NMT-220	220-240V/50-60Hz	0.75	430*325*405
NMT-240	220-240V/50-60Hz	0.75	450*325*405



Model	voltage	Power(kW)	Size(mm)
NMT-160A	220-240V/50-60Hz	0.55	328*341*400
NMT-180A	220-240V/50-60Hz	0.55	348*341*400
NMT-200A	220-240V/50-60Hz	0.55	368*341*400
NMT-220A	220-240V/50-60Hz	0.75	388*341*400
NMT-240A	220-240V/50-60Hz	0.75	408*341*400





FOOD PROCESSOR



Manual Sausage Stuffer

Feature

- Vertical design & horizontal design that counter space
- Stainless steel 201 Body for durability and easy cleaning
- Include 16/19/25/38mm stainless steel funnels so you can make a variety of snack sticks, sausage, and luncheon meats
- Enclosed steel gears turn with 2 speed options, combining with a heavy-duty pressure release valve for ultimate control over sausage consistency



SF-3L



SFH-3L



SFH-7L



MANUAL SAUSAGE STUFFER



Model	Voltage	Power(kW)	Capacity	Size(mm)
SF-3L	/	/	3L	320*280*530
SF-5L	/	/	5L	315*275*620
SF-7L	/	/	7L	320*280*800
SF-10L	/	/	10L	415*315*650
SF-12L	/	/	12L	370*300*720
SF-15L	/	/	15L	415*315*770



Model	Voltage	Power(kW)	Capacity	Size(mm)
SFH-3L	/	/	3L	430*200*210
SFH-5L	/	/	5L	560*200*210
SFH-7L	/	/	7L	690*200*210

Electric Sausage Stuffer



ESF-10L



ESF-10LK



Model	Voltage	Power(kW)	Capacity	Size(mm)
ESF-10L	220-240V/50-60Hz	0.12	10L	415*315*655
ESF-15L	220-240V/50-60Hz	0.12	15L	415*315*780
ESF-20L	220-240V/50-60Hz	0.25	20L	870*470*410
ESF-25L	220-240V/50-60Hz	0.25	25L	940*470*410
ESF-30L	220-240V/50-60Hz	0.25	30L	1050*470*410



ESF-150



PQ-KN69



Model	Voltage	Power(kW)	Capacity	Size(mm)
ESF-150	220-240V/50-60Hz	0.75	15L	600*400*1240
ESF-260	220-240V/50-60Hz	1.10	26L	640*480*1240
ESF-350	220-240V/50-60Hz	1.50	35L	735*560*1250

Pneumatic Quantitative Kink Enema Machine

Range of application:Minced meat/ small pieces of meat



Model	Voltage	Power(kW)	Capacity	Size(mm)
PQ-KN69	220V	/	35L	560*578*1330



MANUAL SAUSAGE SLICER



MANUAL SAUSAGE SLICER



SS-8



ESS-45



Model	Voltage	Power(kW)	Thickness	Size(mm)
SS-8	/	/	8mm	337*162*221
SS-18	/	/	18mm	337*162*221
ESS-45	220-240V/50-60Hz	0.135	/	244*188*327



Body Material:SUS202
Blade material:3Cr13
Stable footing by suction cups, High-quality serrated blades, Easy to clean.





MS-300



MS-300B



MS-220A

Meat Slicer

Anodized Alunimum ,Stainless steel 420J2 balde
Can be used to cut cold meat, ham, fish,cheese, etc.
Stainless steel balde



Model	Voltage	Power(kW)	Slicing Thickness	Blade Dia	Packing Size(mm)
MSD-195	220-240V/50-60Hz	0.20	0~10mm	195mm	384*232*280
MS-220	220-240V/50-60Hz	0.125	0~10mm	220mm	575*465*415
MS-250	220-240V/50-60Hz	0.15	0~10mm	250mm	575*465*415
MS-300	220-240V/50-60Hz	0.25	0~15mm	300mm	615*525*510

Meat Slicer

Aluminium alloy die casting + Painted Base
Blade Material : Stainless Steel 304
Copper Motor



Model	Voltage	Power(kW)	Slicing Thickness	Blade Dia	Dimension(mm)
MS-220B	220-240V/50-60Hz	0.21	0~13mm	220mm	410*400*350
MS-250B	220-240V/50-60Hz	0.24	0~13mm	250mm	470*420*390
MS-300B	220-240V/50-60Hz	0.27	0~17mm	300mm	590*525*440

Meat Slicer

Economic meat slicer
Made by die-casting aluminum alloy and body painted
With safety self-locking function



Model	Voltage	Power(kW)	Slicing Thickness	Blade Dia	Size(mm)
MS-220A	220-240V/50-60Hz	0.12	0.2~12mm	220mm	479*404*350
MS-250A	220-240V/50-60Hz	0.15	0.2~12mm	250mm	479*415*365
MS-275A	220-240V/50-60Hz	0.15	0.2~15mm	275mm	543*462*460
MS-300A	220-240V/50-60Hz	0.25	0.2~15mm	300mm	577*466*430

Meat Grinder



TK-22



Model	Voltage	Power(kW)	Size(mm)
TK-22	220-240V/50-60Hz	0.85	440*270*385
TK-32	220-240V/50-60Hz	1.5	555*350*560



TK-F22



Model	Voltage	Power(kW)	Size(mm)
TK-F8	220-240V/50-60Hz	0.4	470*220*355
TK-F22	220-240V/50-60Hz	0.85	585*270*390
TK-F32	220-240V/50-60Hz	1.5	630*270*440



TK-F22



Model	Voltage	Power(kW)	Size(mm)
TK-12A	220-240V/50-60Hz	0.8	200*370*420
TK-22A	220-240V/50-60Hz	1.1	230*470*445



TC-22



Model	Voltage	Power(kW)	Szie(mm)
TC-12	220-240V/50-60Hz	0.55	400*220*450
TC-22	220-240V/50-60Hz	0.9	430*230*510

Meat Grinder

- Durable Stainless Steel Construction
- Stainless Steel Food Tray
- Easily disassembles for cleaning
- Replacement knife, plstic pusher included
- Durable,offset head design for high speed operation



Model	Voltage	Power(kW)	Size(mm)
MC-90T	220-240V/50-60Hz	0.8	390*500*730
MC-130L	220-240V/50-60Hz	0.85	545*330*660



MC-130L



MG-L12



MG-HM12



MG-22N



MG-JR-12A

Model	Voltage	Power(kW)	Size(mm)
MG-AL8	220-240V/50-60Hz	0.45	435*200*385
MG-AL12	220-240V/50-60Hz	0.65	410*200*385
MG-AL22	220-240V/50-60Hz	0.75	440*210*370

Model	Voltage	Power(kW)	Size(mm)
MG-HM12	220-240V/50-60Hz	0.85	472*220*377
MG-HM22	220-240V/50-60Hz	1.10	493*220*397

Model	Voltage	Power(kW)	Size(mm)
MG-12N	220-240V/50-60Hz	1.1	515*265*315
MG-22N	220-240V/50-60Hz	1.1	515*265*315
MG-32N	220-240V/50-60Hz	1.1	515*265*315

Model	Voltage	Power(kW)	Size(mm)
MG-JR-12A	220-240V/50-60Hz	1.5	560*300*360
MG-JR-22A	220-240V/50-60Hz	1.8	560*300*360
MG-JR-32A	220-240V/50-60Hz	2.2	560*300*360



MG-22



MG-C42A

Model	Voltage	Power(kW)	Size(mm)
MG-12	220-240V/50-60Hz	0.55	429*382*405
MG-22	220-240V/50-60Hz	0.75/1.1	479*420*416

Model	Voltage	Power(kW)	Size(mm)
MG-C42A	220-240V/50-60Hz	4	1150*620*1065
MG-C52A	220-240V/50-60Hz	5.5	1302*684*1198

Bone Saw

- Feature**
- Durable Stainless Steel Construction
 - Stainless Steel Food Tray
 - Easily disassembles for cleaning
 - Replacement knife, plastic pusher included
 - Durable,offset head design for high speed operation



BS-1650



BS1650N



BS-2020

Model	Voltage	Power(kW)	Blade Lenght(mm)	Size(mm)
BS-1650	220-240V/50-60Hz	0.75	1650	550*920*500
BS-2040	220-240V/50-60Hz	1.1	2040	500*470*1200
BS1650N	220-240V/50-60Hz	1.1	1650	500*550*950
BS1200	220-240V/50-60Hz	0.65	1200	400*480*720
BS-2020	220-240V/50-60Hz	1.5	2020	587*670*1584



Electric / Manual Meat Mixer



FME02



FMM01

Model	Voltage	Power(kW)	Capacity(kg)	Size(mm)
FME02	220-240V/50-60Hz	0.3	13-16	240*220*310
FME03	220-240V/50-60Hz	0.55	20-25	390*220*410
FME04	220-240V/50-60Hz	0.55	26-35	390*220*410
FME05	220-240V/50-60Hz	0.9	35-43	300*240*360
FME06	220-240V/50-60Hz	0.9	39-55	300*240*360



Model	Capacity(kg)	Size(mm)
FMM01	11	320*230*300
FMM02	20	420*250*360
FMM03	30	440*310*400
FMM04	40	480*350*450
FMM05	50	550*350*460
FMM06	60	550*380*475





MFM-200

Meatball Forming Machine

Model	Voltage	Power(kw)	Capacity	Size(mm)
MFM-200	220-240V/50-60Hz	1.1	300pcs/min	420*360*820
MFM-280	220-240V/50-60Hz	1.1	230pcs/min	640*380*1230
MFM-280S	220-240V/50-60Hz	1.1	230pcs/min	670*380*1240



MFM-280



MB-18R



EMB-18R

Meatball Beater

Model	Voltage	Power(kw)	Output	Weight(kg)	Size(mm)
MB-18R	220V/50Hz	1.5KW	2KG/1	23	320*320*820
MB-20R	220V/50Hz	1.5KW	2.5KG/1	25	320*350*820
MB-22R	220V/50Hz	2.2KW	3KG/1	30	370*390*830
MB-24R	220V/50Hz	3KW	3.5KG/1	35	370*420*830

Meatball Beater

Model	Voltage	Power(kw)	Output	Weight(kg)	Size(mm)
EMB-18R	220V/50Hz	1.5KW	2KG/1	23KG	320*320*820
EMB-20R	220V/50Hz	1.5KW	2.5KG/1	25KG	320*350*820
EMB-22R	220V/50Hz	2.2KW	3KG/1	30KG	370*390*830
EMB-24R	220V/50Hz	3KW	3.5KG/1	35KG	370*420*830
EMB-30R	220V/50Hz	3KW	8KG/1	50KG	460*410*860

Combo Plucker with Scalding

Body materil: S.S. 201
Natural rubber fingers
Motor: Copper Motor
With water inlet & hose / With water valves at side face
With 4 wheels (2 lock, 2 without lock) - Bottom water proof cover
Auto thermsotat / Over temperature limiter
On/Off power switch
Suits for quail, pegin, chicken,etc.

Model	Voltage	Power(kw)	NW(kg)	Size(mm)
CHZ-N45-S	220~240V/50~60Hz; 110V/60Hz	0.55+1.8	66.3	920*502*842
CHZ-N50-S	220~240V/50~60Hz; 110V/60Hz	1.5+1.8	80.1	1020*554*955
CHZ-N55-S	220~240V/50~60Hz; 110V/60Hz	1.5+1.8	85.9	1122*602*955
CHZ-N60-S	220~240V/50~60Hz; 110V/60Hz	1.5+1.8	93.4	1221*652*955



CHZ-40



CHZ-N45-S




GNZ-N45

Model	Voltage	Power(kw)	NW(kg)	Size(mm)
CHZ-40	220V/50Hz	0.18	23.68	446*446*680
CHZ-45	220V/50Hz	0.55	38	510*510*800
CHZ-50	220V/50Hz	1.5	50	570*570*890
CHZ-55	220V/50Hz	1.5	53	613*613*890
CHZ-60	220V/50Hz	1.5	58	670*670*890
CHZ-65	220V/50Hz	1.5	64.1	702*703*945

Model	Voltage	Power(kw)	NW(kg)	Size(mm)
CHZ-N30	220V/50Hz	0.15	18	347*347*668
CHZ-N45	220V/50Hz	0.55	40	510*510*890
CHZ-N50	220V/50Hz	1.5	50	570*570*1100
CHZ-N55	220V/50Hz	1.5	59	610*610*1100
CHZ-N60	220V/50Hz	1.5	57.5	670*670*1100
CHZ-N65	220V/50Hz	1.5	64.1	702*703*945
CHZ-N50-1	220V/50Hz	1.5	53.2	570*570*1100
CHZ-N80	220V/50Hz	2.2	90	862*862*1150



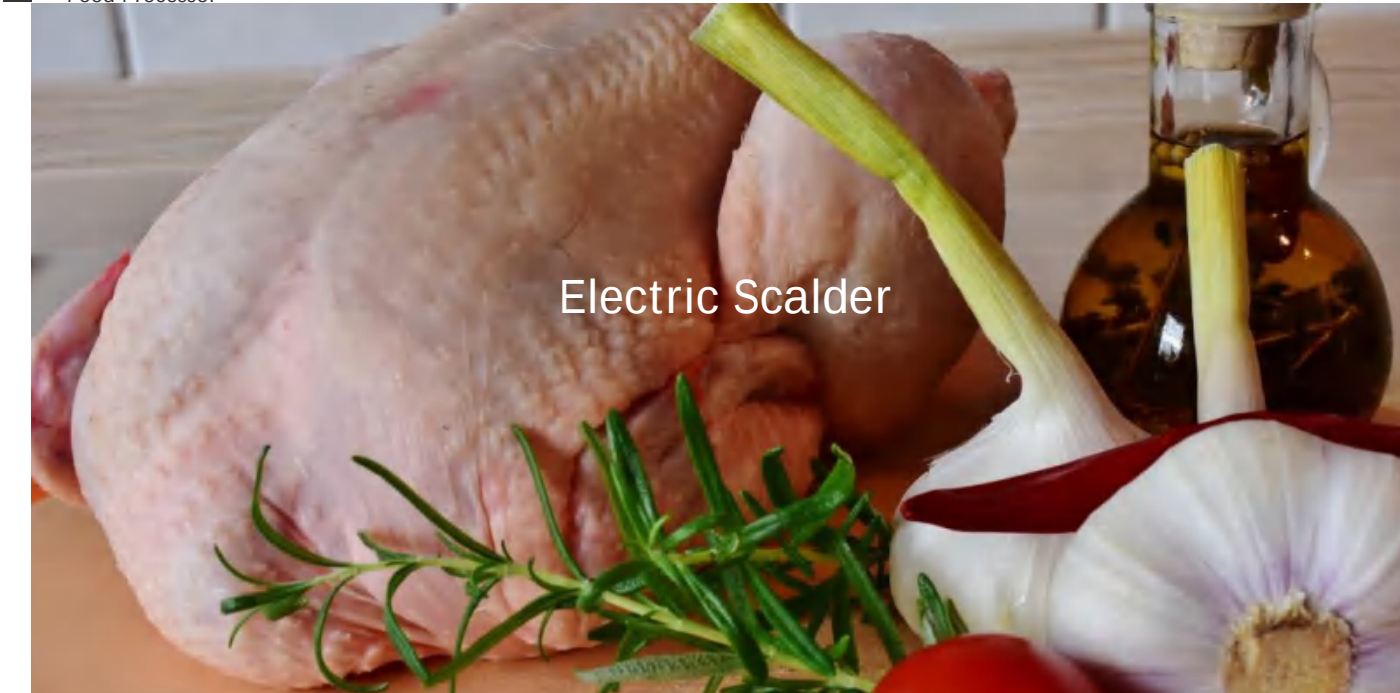

Electric Scalders

ELECTRIC SCALDER



ES-70L



ES-120L

Body material: S.S. 201
Basket material: S.S. 201
Include device:Thermostat, temperature limiter, power switch

Model	Voltage	Power(kw)	NW(kg)	Capacity(L)	Dimension(mm)
ES-70L	220-240V/50-60Hz	1.8	18.92	55	350*350*640
ES-120L	220-240V/50-60Hz	3 / 2	30	100	600*500*640



Potato Peeler



- Feature**
- Durable Stainless steel construction.
 - High efficiency ventilated motors for continuous operation.
 - Stainless steel peeling disc.
 - Easy to replace abrasive surface.
 - Patented removable dishwashing safe container and bottom peeling disc (no tools required)



POTATO PEELER



PP-10



PP-10C

Model	Voltage	Power(kW)	Capacity(kg)	Size (mm)
PP-10	220-240V/50-60Hz	0.55	10	680*410*960
PP-15	220-240V/50-60Hz	0.75	20.6L	415*586*1090
PP-20	220-240V/50-60Hz	0.95	27L	465*615*1120



Model	Voltage	Power(kW)	Capacity	Size (mm)
PP-10C	220-240V/50-60Hz	0.55	10Kg	460*450*785
PP-15C	220-240V/50-60Hz	0.75	15Kg	520*500*850
PP-30C	220-240V/50-60Hz	1.5	30Kg	590*580*1020



Meat Tenderizer



EMT-1



MT-1

Hamburger Press



HB-100



Model	Voltage	Power(kW)	Size(mm)
EMT-1	220-240V/50-60Hz	0.45	430*170*420
MT-1	/	/	390*320*440



Model	Voltage	Power(kW)	Bowl Diameter	Size(mm)
HB-100	/	/	100mm	290*210*275
HB-130	/	/	130mm	290*210*275
HB-150	/	/	150mm	290*210*275

Bowl Cutter

Bowl lock safety cover
Include bowl,knife comb,and stainless steel legs with rubber feet
Chops meat, bread crumbs and other foods uniformly
Knives are easy to remove for cleaning
Housing doesn't have crevices to tra food particles



ZB-10L



ZB-350



ZB-24L



ZB-24



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
ZB-6L	220-240V/50-60Hz	0.4	6	680*441*385
ZB-10L	220-240V/50-60Hz	0.75	10	760*515*452
ZB-350	220-240V/50-60Hz	0.37	5	500*420*530



Model	Voltage	Power(kW)	Capacity(L)	Size(mm)
ZB-24L	220-240V/50-60Hz	1.5	24	885*695*992
ZB-24	220-240V/50-60Hz	1.5	24	899*707*926



Vegetable Cutter



Model	Voltage	Power(kW)	Capacity(kg)	size(mm)
VC-300	220-240V/50-60Hz	0.55	300Kg/hr	614*246*506



Model	Voltage	Power(kW)	Capacity	size(mm)
HR-6	220-240V/50-60Hz	1.8	6L	523*316.5*394
HR-9	220-240V/50-60Hz	1.8	9L	523*316.5*444
HR-12	220-240V/50-60Hz	2	12L	523*316.5*489



Model	Voltage	Power(kW)	Capacity	Dimension(mm)
VC-5	220-240V/50-60Hz	0.55	5L	360*400*530
VC-7	220-240V/50-60Hz	0.75	7L	380*420*540
VC-10	220-240V/50-60Hz	1.10	10L	400*440*570
VC-15	220-240V/50-60Hz	1.40	15L	420*460*620



VC-300



HR-6



VC-5



PS-04



PS-12



PS-14



PS-13

VEGETABLE SLICER


Vegetable Slicer

Full stainless steel food-zone: no aluminum
New generation patented EZY-Clean System II which saves you time
(you can easily remove the cover,
bowl and basket thanks to the newergonomics)

Model	/	N.W(KG)	G.W(KG)	Dimension(mm)
PS-04	Operated by hand	7.3	7.8	215*175*500
PS-14	Operated by hand	2.25	2.8	210*210*475
PS-12	Operated by hand	6.7	7.3	430*320*520
PS-13	Operated by hand	7.6	8.3	520*260*490

Potato Spiral Slicer

Full stainless steel food-zone: no aluminum
New generation patented EZY-Clean System II which saves you time (you can easily remove the cover, bowl and basket thanks to the new ergonomics)

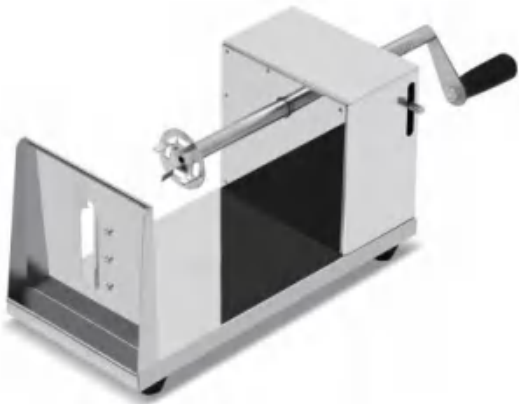

H001



H002

POTATO SPIRAL SLICER / FRENCH FRY CUTTER

French Fry Cutter

New generation patented EZY-Clean System II which saves you time (you can easily remove the cover, bowl and basket thanks to the new ergonomics)



PC004
Manual Potato Slicer (Aluminum Casting)




PC005
Manual Potato Slicer (Stainless steel)

Onion Cutter



DRB-SDYC

Tomato Cutter

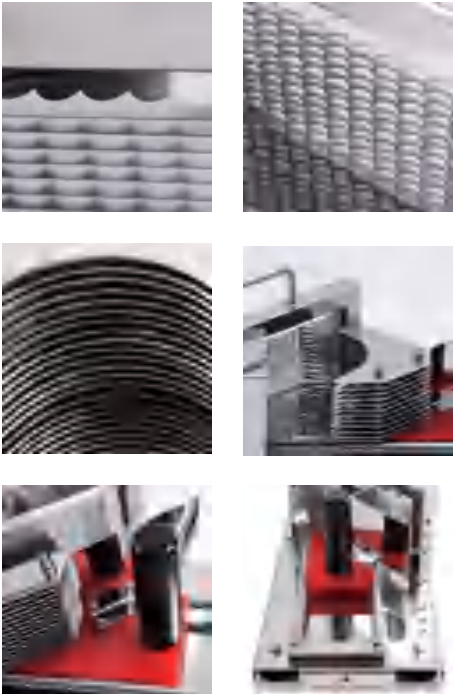

TS-4

ONION CUTTER / TOMATO CUTTER



Model	NW/GW(kg)	Power(kw)	Machine Size(mm)
H001	1/1.2	By hand	250*120*140
H002	6.3/6.67	0.02	460*160*180

Model	NW/GW(kg)	Power	Dimension(mm)
PC004	7/7.25	Operated by hand	280*170*215
PC005	6.5/7	Operated by hand	290*200*210

Model	Number of petals	Processing capacity	Onion diameter	Size(mm)
DRB-SDYC	24 petals	300-700pcs/hour	within 155mm	280*170*215

Full stainless steel food-zone: no aluminum
New generation patented EZY-Clean System II which saves you time (you can easily remove the cover, bowl and basket thanks to the new ergonomics)
TS-4 Carton:450*210*210mm
TS-5.5 Carton:450*210*210mm

Sugar Cane Juicer



MF-L80



MF-T80



Model	Voltage	Power(kW)	Capacity(kg/H)	Size(mm)
MF-L80	220-240V/50-60Hz	1.1	300	480*380*780
MF-T80	220-240V/50-60Hz	0.35	200	480*380*580



MF-L80N



MF-T80N



Model	Voltage	Power(kW)	Capacity(kg/H)	Size(mm)
MF-L80N	220-240V/50-60Hz	1.1	200	480*380*780
MF-T80N	220-240V/50-60Hz	0.35	300	480*380*580

Ice Crusher

- Stainless Steel, Heavy-Duty Hopper
- Ergonomic Handle
- Easy Product Visibility
- High Efficiency
- Easy to operate



MIC-118



MIC-128



Model	Voltage	Power(kW)	Output Capacity(kgs/h)	Size (mm)
MIC-108	220-240V/50-60Hz	0.2	200	400*300*380
MIC-108P	220-240V/50-60Hz	0.18	120	400*300*380
MIC-118	220-240V/50-60Hz	0.18	200	260*400*420



Model	Voltage	Power(kW)	Output Capacity(kgs/h)	Size (mm)
MIC-128	220-240V/50-60Hz	0.18	200	480*420*580
MIC-128L	220-240V/50-60Hz	0.2	200	400*490*620

Ice Crusher

Stainless Steel, Heavy-Duty Hopper
Ergonomic Handle
Easy Product Visibility
High Efficiency
Easy to operate



BL-818S



BL-16



Model	Voltage	Power(kW)	Jug Capacity	Size (mm)
BL-818S	220-240V/50-60Hz	1.3	1.5L	250*220*420
BL-16	220-240V/50-60Hz	1.8	1L	220*220*490

Ice Crusher

Stainless Steel, Heavy-Duty Hopper
Ergonomic Handle
Easy Product Visibility
High Efficiency
Easy to operate



BL-9001



BL-9002S



BL-9003S



BL-9005S



Model	Voltage	Power(kW)	Jug Capacity	Size (mm)
BL-9001	220-240V/50-60Hz	1.8	1L	220*220*490
BL-9002S	220-240V/50-60Hz	1.8	1.5L / 2L	220*220*490
BL-9003S	220-240V/50-60Hz	1.8	2L	220*220*490
BL-9005S	220-240V/50-60Hz	1.3	1L	250*220*420

Ice Crusher

- Stainless Steel, Heavy-Duty Hopper
- Ergonomic Handle
- Easy Product Visibility
- High Efficiency
- Easy to operate



BL-9006



BL-818B



BL-818C



BL-818D

Model	Voltage	Power(kW)	Jug Capacity	Size (mm)
BL-9006	220-240V/50-60Hz	1.3	1.5L	250*220*420
BL-818B	220-240V/50-60Hz	1.3	1L	250*220*420
BL-818C	220-240V/50-60Hz	1.3	1L	250*220*420
BL-818D	220-240V/50-60Hz	1.3	1L	250*220*420

Orange Juicer

Small size, attractive design, versatility and speed, it is the ideal squeezer for almost any type of establishment: Office, cafeteria, special event stand, shop, gas station, any type of restaurant, school, hospital, fitness center, ice cream parlor, bar and many more.

High quality components.

Full body without joints of grade stainless steel.

Easy to serve (push a button) and very easy to clean (only once a day, 5-10 minutes).



Model	Voltage	Power(kW)	Size (mm)
MF-2000E-1	220-240V/50-60Hz	0.12	400*330*790
MF-2000E-2	220-240V/50-60Hz	0.12	400*300*770



MF-2000E-2



CJ-50MH



CJ-50MC



CJ-50MS

Model	Voltage	Power(kW)	N.W./G.W.(kg)	Size (mm)
CJ-50MH	220V-240V~ 50/60Hz,110V-120V~ 60Hz	0.25	8.65/9.55	375*245*460
CJ-50MC	220V-240V~ 50/60Hz,110V-120V~ 60Hz	0.25	8.15/8.95	200*425*228
CJ-50MS	220V-240V~ 50/60Hz,110V-120V~ 60Hz	0.25	8.0/8.7	200*425*228

Juice Extractor



MF-A2000



MF-B2000



Model	Voltage	Power(kW)	Capacity	Size (mm)
MF-A2000	220-240V/50-60Hz	0.55	100~120Kg/h	430*350*450
MF-A3000	220-240V/50-60Hz	0.37	80~100Kg/h	340*270*360
MF-B2000	220-240V/50-60Hz	0.55	100~120Kg/h	430*350*450
MF-B3000	220-240V/50-60Hz	0.55	80~100Kg/h	340*270*360

Manual Orange press machine



HJ-2



HJ-P

Material:

Chrome Plated Finished,
Stainless Steel 18/8 forTouching Orange ,
Die Casting alimiuniu Alloy Constrction.

Model	Weight(kGS)	QTY/CTN	Meas(mm)	Size(mm)
HJ-2	10.8	1pcs/ctn	570*385*315	185*150*375
HJ-P	13.2	1pcs/ctn	600*395*345	195*165*380

Manual Orange press machine

Handle maximizes your leverage while juicing, delivering excellent yield while minimizing waste. four non-skid feet securely hold the juicer in place on your countertop, so this unit won't slide around during use. Intelligent operation, make your work more efficient. Removable strainer and funnel catch waste, the only thing your customers will be enjoying is freshly squeezed juice.



Manual Orange press machine


Handle maximizes your leverage while juicing, delivering excellent yield while minimizing waste.

four non-skid feet securely hold the juicer in place on your countertop, so this unit won't slide around during use.

Intelligent operation, make your work more efficient.

Removable strainer and funnel catch waste, the only thing your customers will be enjoying is freshly squeezed juice.

Model	Weight	Meas (mm)	QTY/CTN	Size (mm)
HJ-G	9.5KGS	425*285*520	1pcs/ctn	265*205*500



HJ-G

Manual Orange press machine

Model	Weight	Meas (mm)	QTY/CTN	Size (mm)
GRS-U	6.75KGS	445*395*510	2pcs/ctn	374*209*485



HJ-U(BLACK)



HJ-U(RED)



HJ-A1



HJ-D



HJ-2



HJ-WS



HJ-WS



HJ-WS

Model	Weight	Meas (mm)	QTY/CTN	Size (mm)
HJ-A1	13.5KGS	570*420*315	1pcs/ctn	85*150*410
HJ-D	15KGS	475*385*530	1pcs/ctn	230*185*515
HJ-2	10.8KGS	570*385*315	1pcs/ctn	185*150*375

Model	Weight	Meas (mm)	QTY/CTN	Size (mm)
RED	10.6KGS	385*245*325	1pcs/ctn	230*185*410
GREY	10.6KGS	385*245*325	1pcs/ctn	230*185*410
BLACK	10.6KGS	385*245*325	1pcs/ctn	230*185*410

Immersion Blender

Stainless steel blending shaft; easily removable

Stainless steel blade and sturdy motor housing ensure reliable performance in commercial settings

User-Friendly Design

Stainless Steel Components



MIB350CF



MIB750LF



MHM-750SW



MHM-550S



Model	Voltage	Power(kW)
MIB350CF	220-240V/50-60Hz	0.35
MIB350CV	220-240V/50-60Hz	0.35
MIB500LF	220-240V/50-60Hz	0.5
MIB750LF	220-240V/50-60Hz	0.75
MIB750LV	220-240V/50-60Hz	0.75



Model	Voltage	Power(kW)	Size(mm)
MHM-550S	220-240V/110V	0.35	306*87
MHM-550SW	220-240V/110V	0.35	306*87
MHM-350S	220-240V/110V	0.35	306*87
MHM-350SW	220-240V/110V	0.35	306*87
MHM-750S	220-240V/110V	0.75	331*113
MHM-750SW	220-240V/110V	0.75	331*113



Whisk

Model	Size (mm)
MWIK185	185mm
MWIK250	250mm



MWIK185



MBLD300

Blender Tube

Model	MBLD350	MBLD400	MBLD450	MBLD500	MBLD550
Size(mm)	350mm	160mm	200mm	250mm	300mm
Size(mm)	/	400mm	450mm	500mm	550mm

